


Level (100:6004 Hz) = 97.77 dB SPL/watt (8 ohms, @1.00 meters)

10MB3P

MLSSA: Frequency Domain

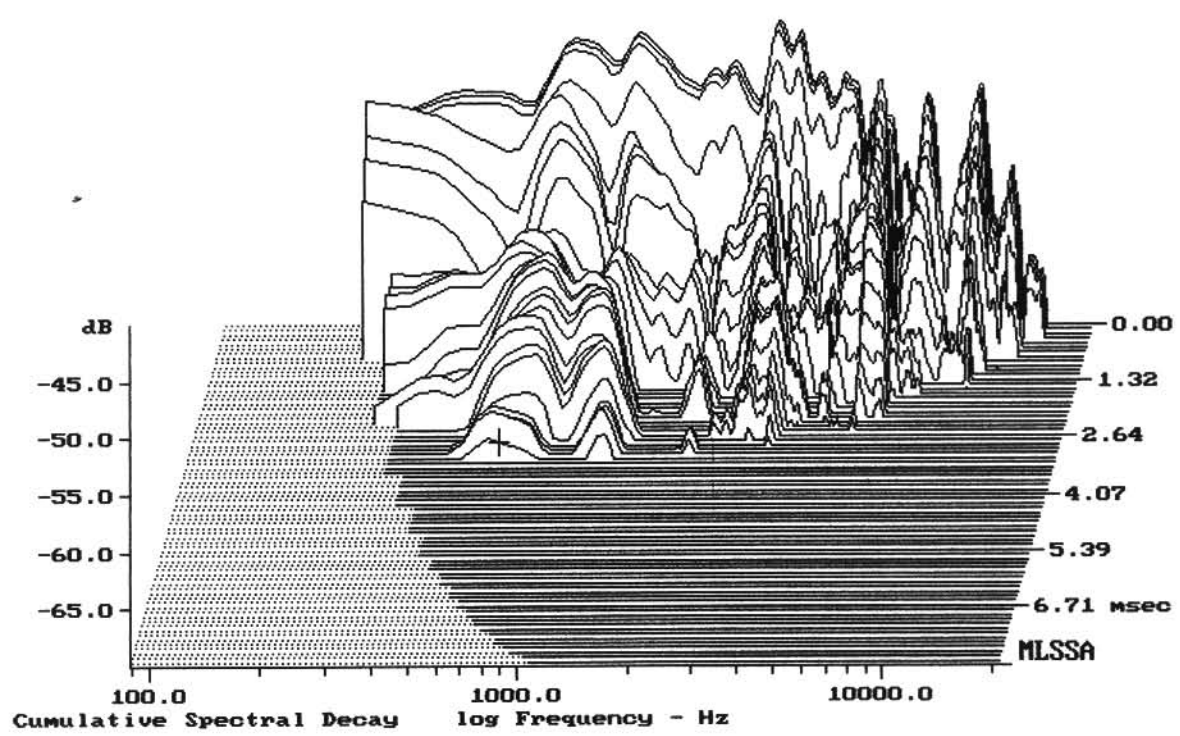

-68.45 dB, 621 Hz (14), 3.190 msec (30)

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.71	Ohms
2	Fs	85.48	Hz
3	Re	5.61	Ohms[dc]
4	Res	216.26	Ohms
5	Qms	18.73	
6	Qes	0.49	
7	Qts	0.47	
8	L1	0.22	mH
9	L2	0.64	mH
10	R2	5.86	Ohms
11	RMSE-load	0.31	Ohms
12	Vas(Sd)	20.62	liters
13	Mms	28.33	grams
14	Cms	122	$\mu\text{M}/\text{Newton}$
15	B1	13.25	Tesla-M
16	SPLref(Sd)	96.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.5% (-20% to -50% is recommended).

10MB3P

MLSSA: Parameters

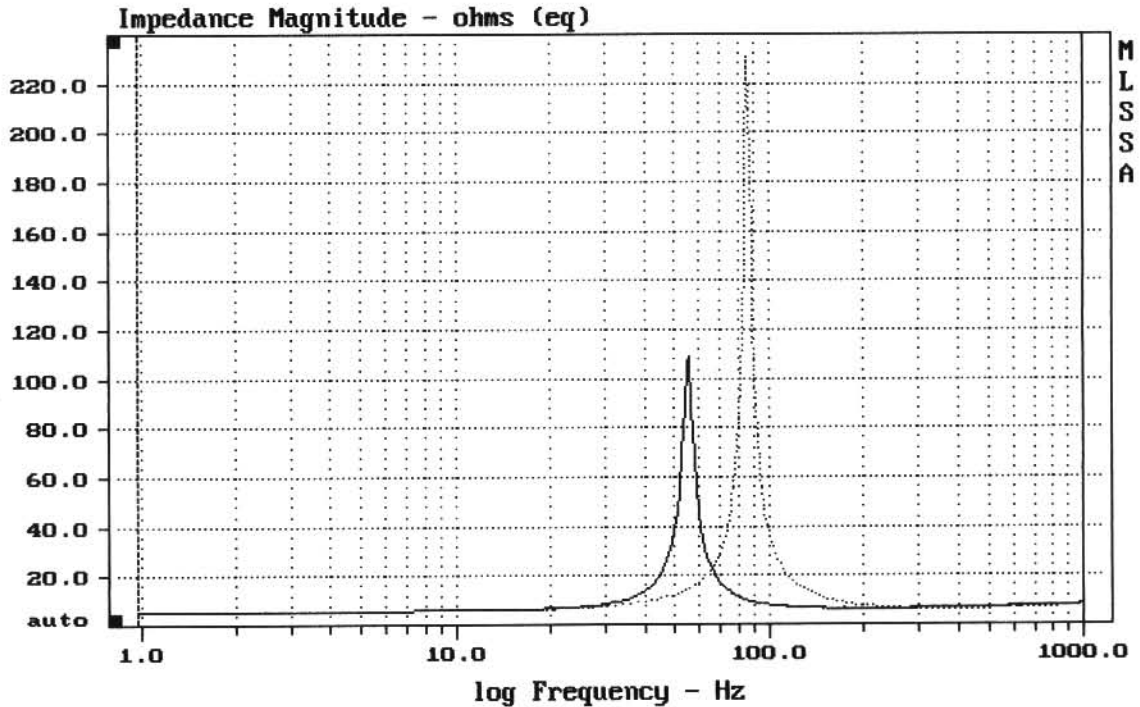

mean: 10.31, rms: 19.8, std: 16.91, max: 230.4, min: 5.66

DTTO

MLSSA: Frequency Domain