


Level (78:21507 Hz) = 88.52 dB SPL/watt (4 ohms, @1.00 meters)

5TR4A

MLSSA: Frequency Domain

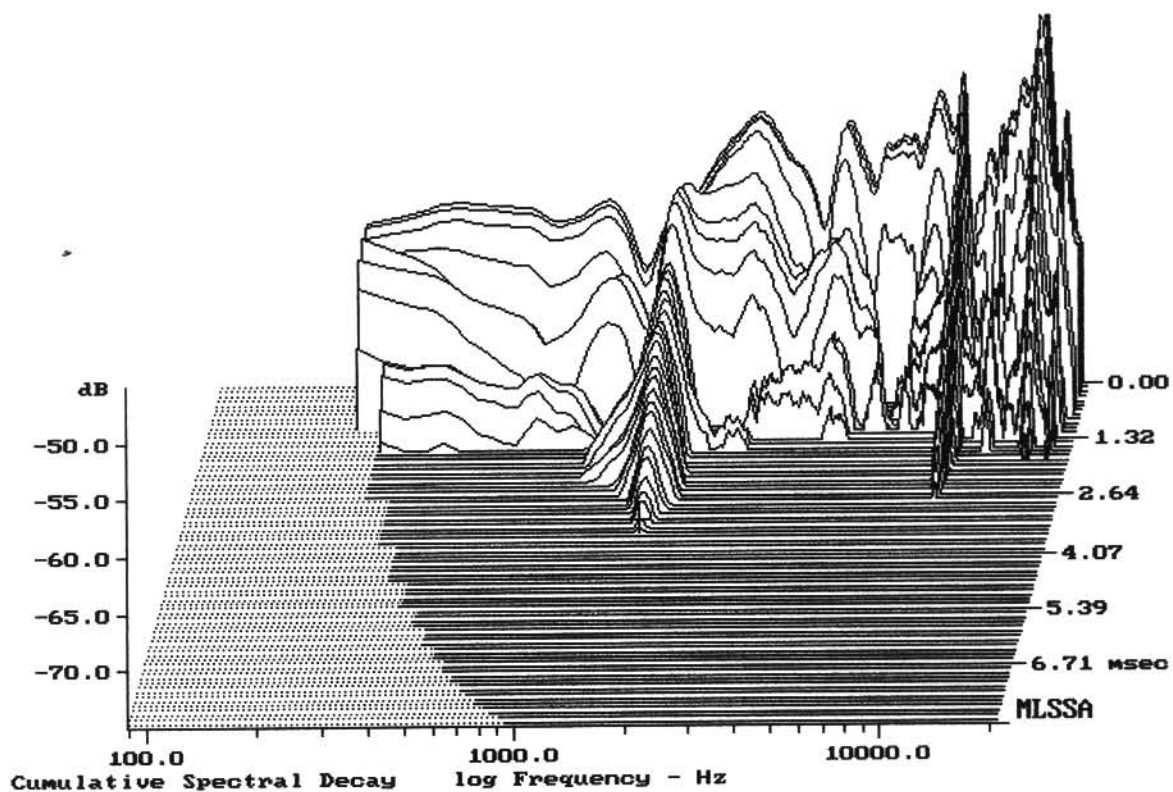

-74.26 dB, 1554 Hz (35), 3.410 msec (32)

## Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.09	Ohms
2	Fs	110.14	Hz
3	Re	3.46	Ohms[dc]
4	Res	9.87	Ohms
5	Qms	3.94	
6	Qes	1.38	
7	Qts	1.02	
8	L1	0.01	mH
9	L2	0.27	mH
10	R2	2.36	Ohms
11	RMSE-load	0.13	Ohms
12	Vas(Sd)	2.34	liters
13	Mms	7.04	grams
14	Cms	297	$\mu\text{M}/\text{Newton}$
15	Bl	3.49	Tesla-M
16	SPLref(Sd)	85.4	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (10.00 grams)

Area (Sd): 75.00 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.2% (-20% to -50% is recommended).

5TR4A

MLSSA: Parameters

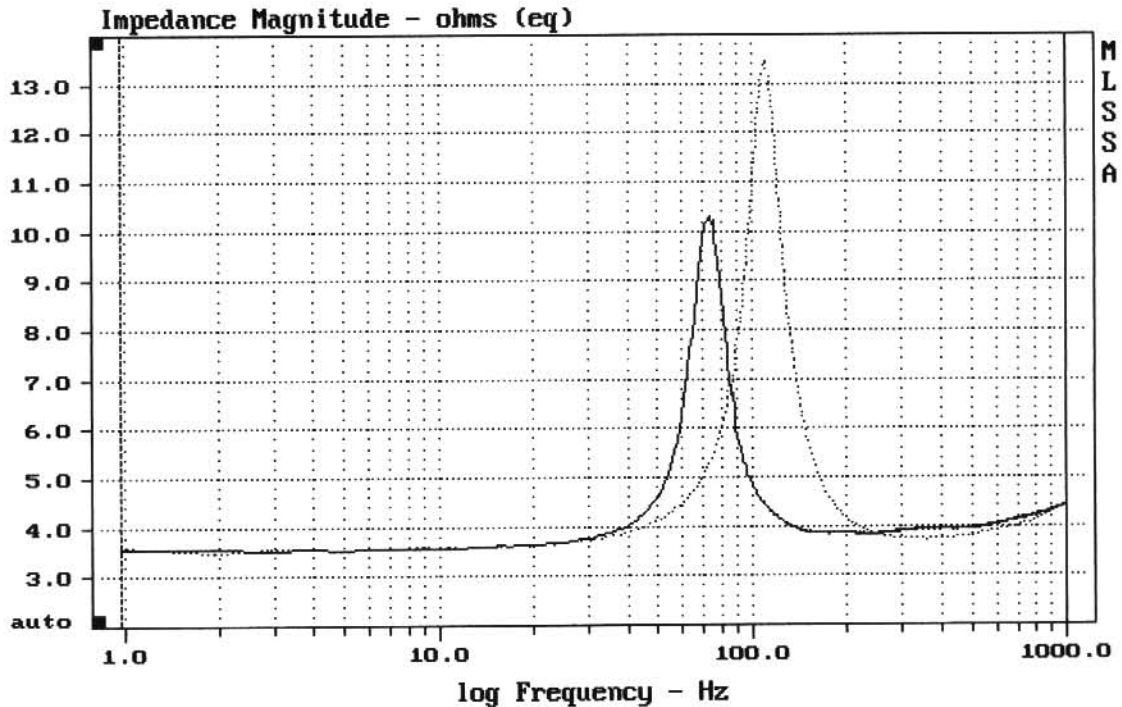


---

mean: 4.395, rms: 4.648, std: 1.513, max: 13.47, min: 3.484

---

DTTO

MLSSA: Frequency Domain