


Level (55:23404 Hz) = 88.69 dB SPL/watt (4 ohms, @1.00 meters)

6TR4A

MLSSA: Frequency Domain

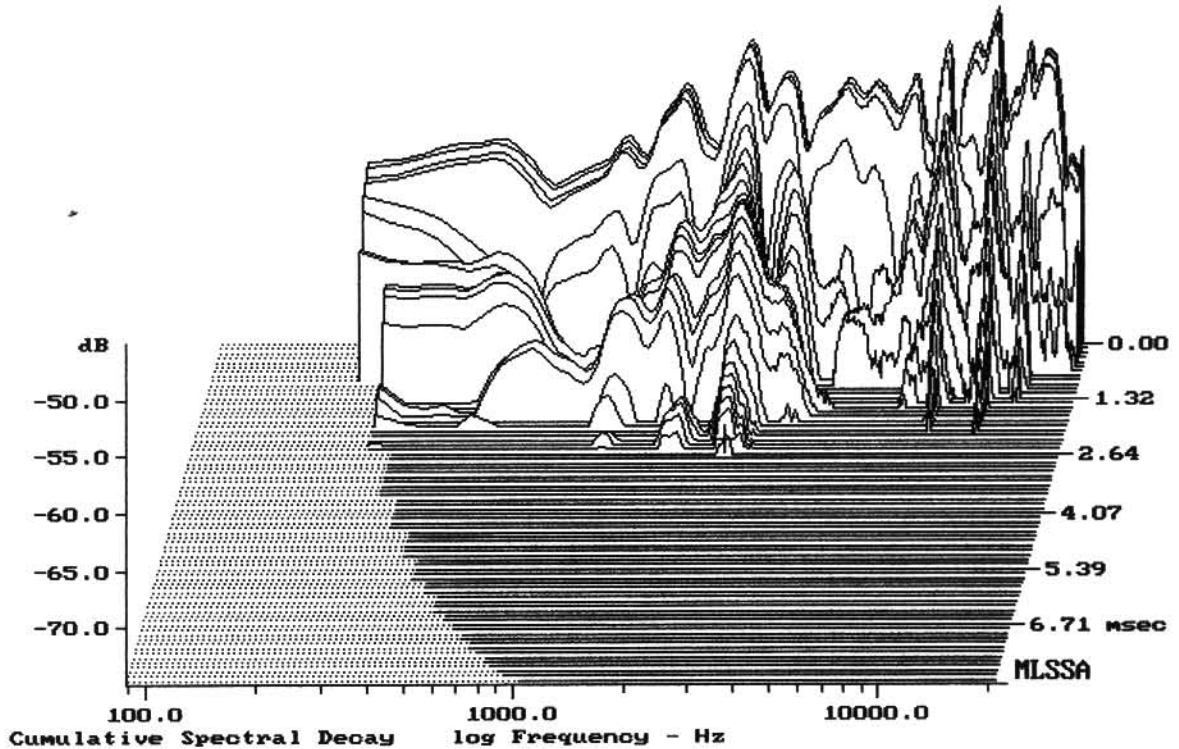

-73.70 dB, 2530 Hz (57), 2.640 msec (25)

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.12	Ohms
2	Fs	86.51	Hz
3	Re	3.33	Ohms[dc]
4	Res	9.04	Ohms
5	Qms	5.93	
6	Qes	2.18	
7	Qts	1.59	
8	L1	-89.63	mH
9	L2	89.89	mH
10	R2	177894.17	Ohms
11	RMSE-load	0.09	Ohms
12	Vas(Sd)	5.98	liters
13	Mms	11.45	grams
14	Cms	296	$\mu\text{M}/\text{Newton}$
15	Bl	3.08	Tesla-M
16	SPLref(Sd)	84.3	dB[Re]
17	Rub-index	0.06	

Method: Mass-loaded (10.00 grams)

Area (Sd): 120.00 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.2% (-20% to -50% is recommended).

6TR4A

MLSSA: Parameters

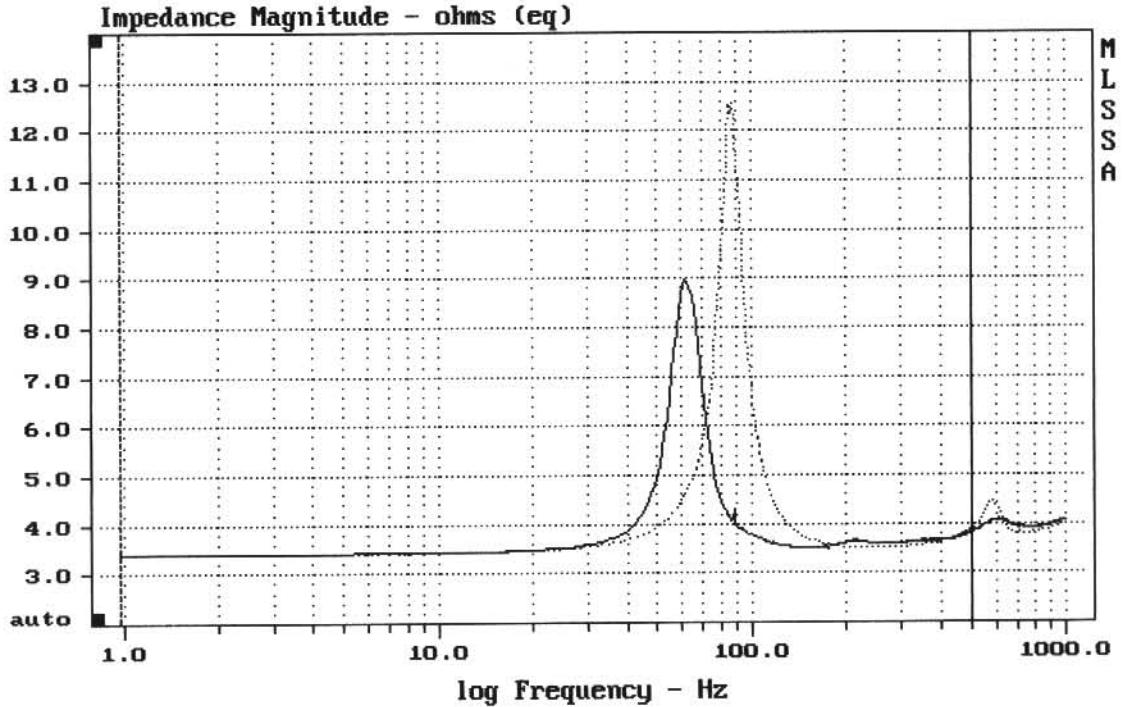

mean: 4.057, rms: 4.311, std: 1.459, max: 12.57, min: 3.398

DTTO

MLSSA: Frequency Domain