


Level (67:5005 Hz) = 86.78 dB SPL/watt (4 ohms, @1.00 meters)

6MB11A

MLSSA: Frequency Domain

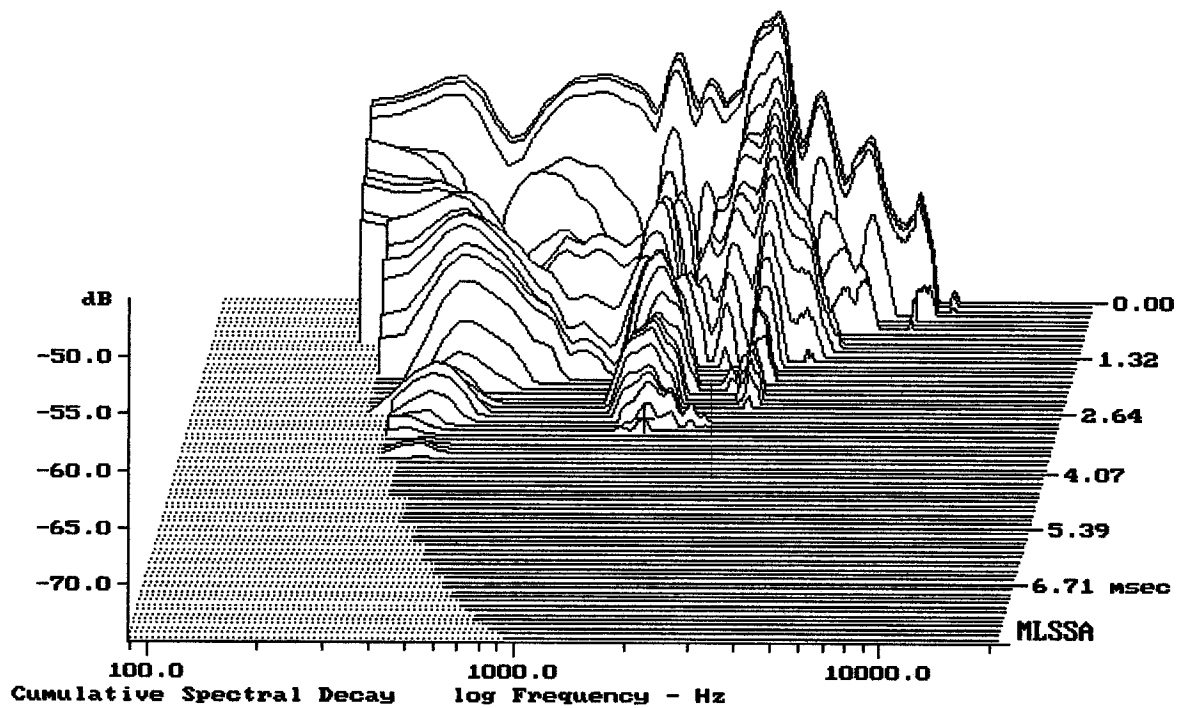

-73.90 dB, 1554 Hz (35), 3.000 msec (29)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.24	Ohms
2	Fs	84.77	Hz
3	Re	3.55	Ohms[dc]
4	Res	10.41	Ohms
5	Qms	5.21	
6	Qes	1.78	
7	Qts	1.33	
8	L1	0.11	mH
9	L2	0.20	mH
10	R2	1.34	Ohms
11	RMSE-load	0.29	Ohms
12	Vas(Sd)	14.49	liters
13	Mms	9.32	grams
14	Cms	378	$\mu\text{M}/\text{Newton}$
15	Bl	3.15	Tesla-M
16	SPLref(Sd)	88.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (10.00 grams)

Area (Sd): 165.13 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.1% (-20% to -50% is recommended).

SELENIUM 6MB11A

MLSSA: Parameters

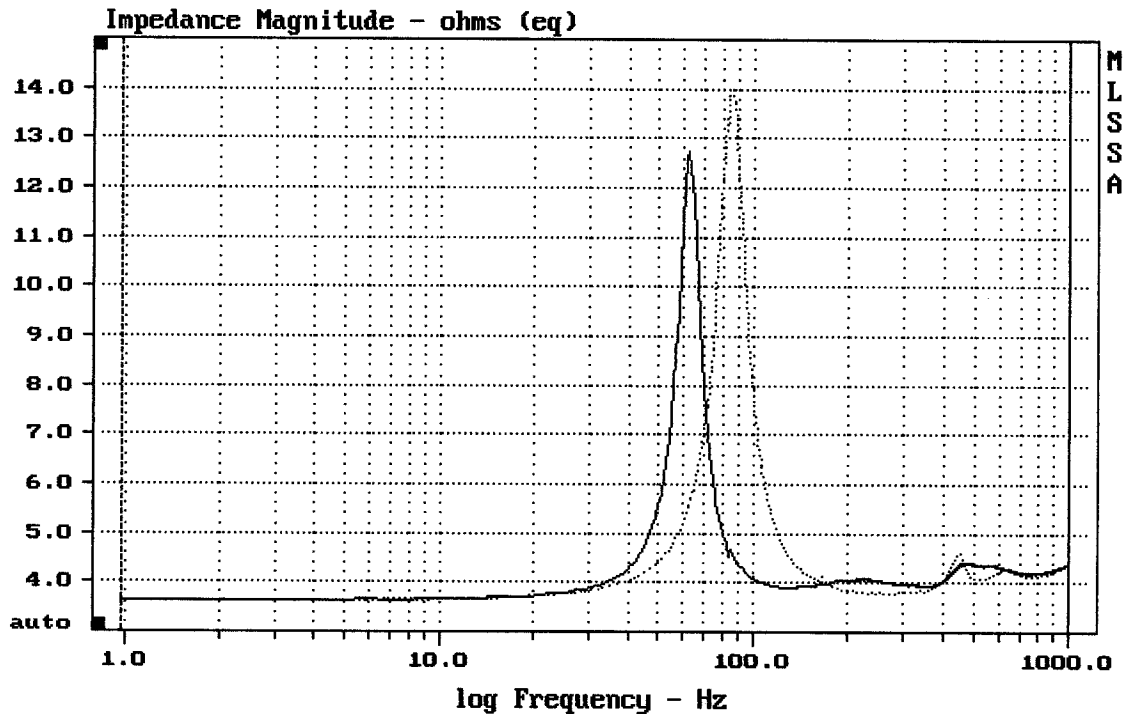

mean: 4.376, rms: 4.555, std: 1.263, max: 14.07, min: 3.616

DTTO

MLSSA: Frequency Domain