


Level (100:4506 Hz) = 93.94 dB SPL/watt (8 ohms, @1.00 meters)

10CV4

MLSSA: Frequency Domain

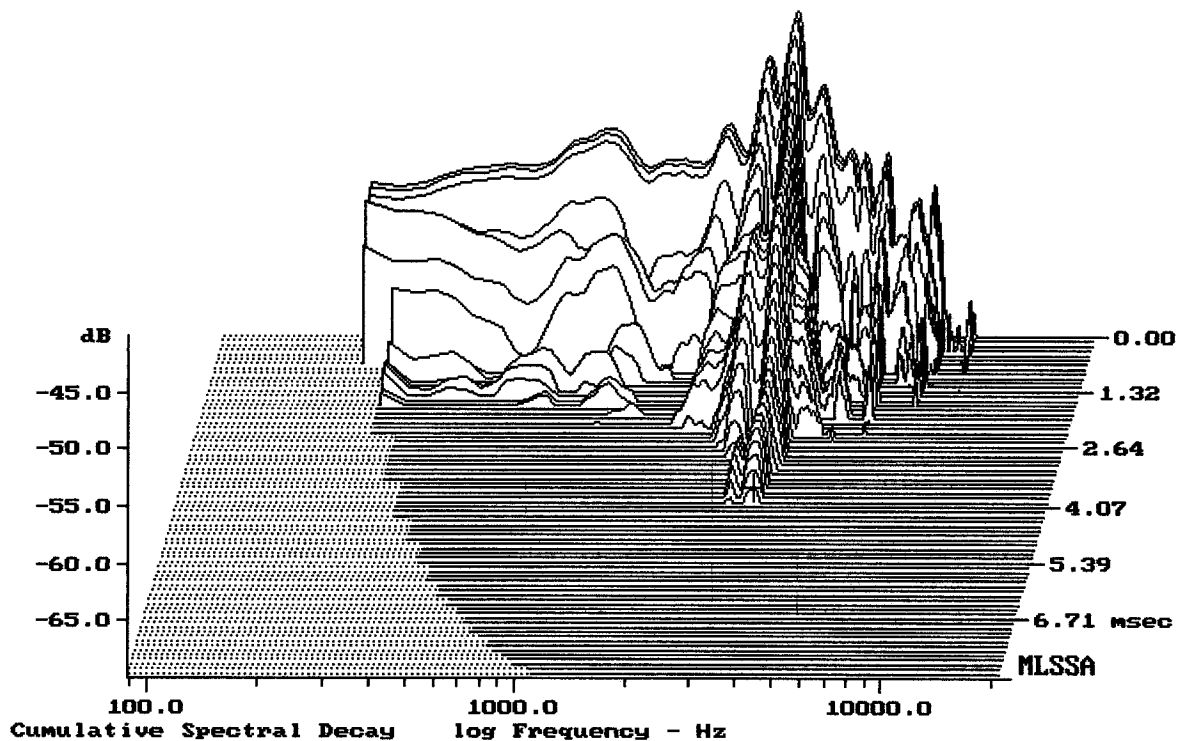

-68.75 dB, 3285 Hz (74), 3.960 msec (37)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.20	Ohms
2	Fs	96.79	Hz
3	Re	6.28	Ohms[dc]
4	Res	49.57	Ohms
5	Qms	17.09	
6	Qes	2.16	
7	Qts	1.92	
8	L1	0.45	mH
9	L2	0.56	mH
10	R2	2.67	Ohms
11	RMSE-load	0.38	Ohms
12	Vas(Sd)	19.28	liters
13	Mms	23.64	grams
14	Cms	114	μ M/Newton
15	Bl	6.46	Tesla-M
16	SPLref(Sd)	90.9	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (30.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.2% (-20% to -50% is recommended).

10CV4

MLSSA: Parameters

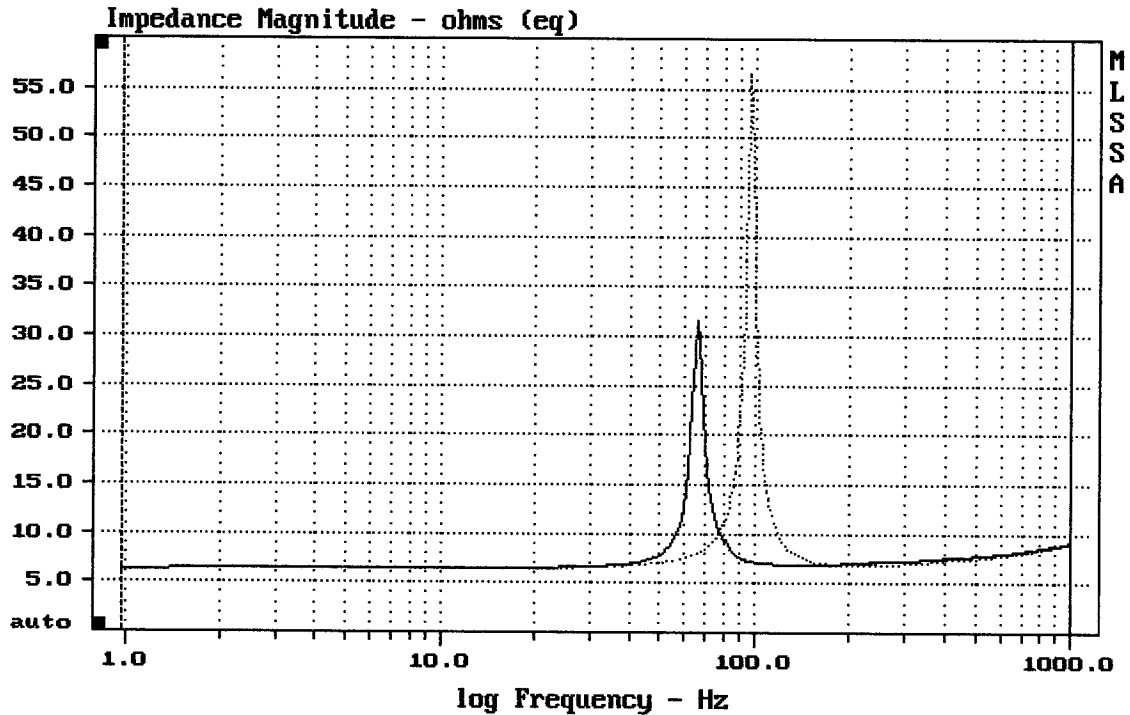

mean: 8.307, rms: 9.195, std: 3.943, max: 56.41, min: 6.279

MLSSA: Frequency Domain