

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.38	Ohms
2	Fs	53.38	Hz
3	Re	5.68	Ohms[dc]
4	Res	121.11	Ohms
5	Qms	5.99	
6	Qes	0.28	
7	Qts	0.27	
8	L1	0.23	mH
9	L2	2.07	mH
10	R2	4.55	Ohms
11	RMSE-load	0.40	Ohms
12	Vas(Sd)	39.52	liters
13	Mms	34.42	grams
14	Cms	258	μ M/Newton
15	B1	15.28	Tesla-M
16	SPLref(Sd)	95.1	dB[Re]
17	Rub-index	0.00	


Method: Mass-loaded (40.00 grams)

Area (Sd): 330.06 sq cm

DCR mode: Measure (-0.09 ohms)

QC file: CLOSED


Analysis successful. Shift in Fs = -31.3% (-20% to -50% is recommended).

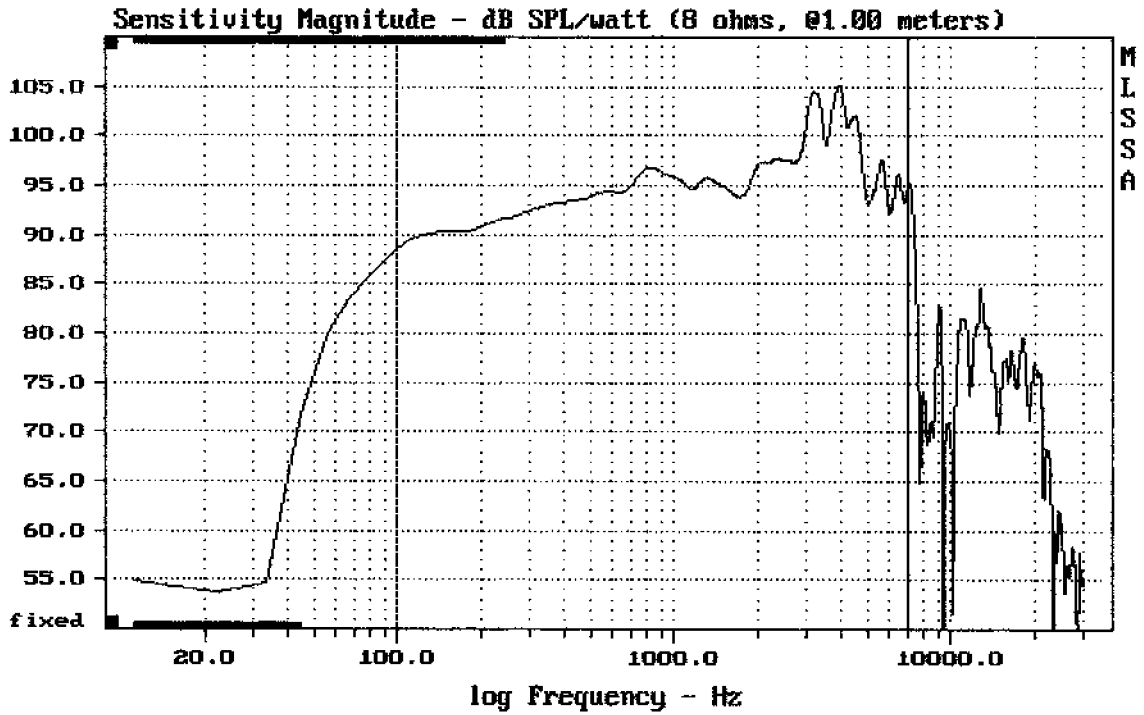

Level (100:7002 Hz) = 96.54 dB SPL/watt (8 ohms, @1.00 meters)

10PS26

MLSSA: Frequency Domain

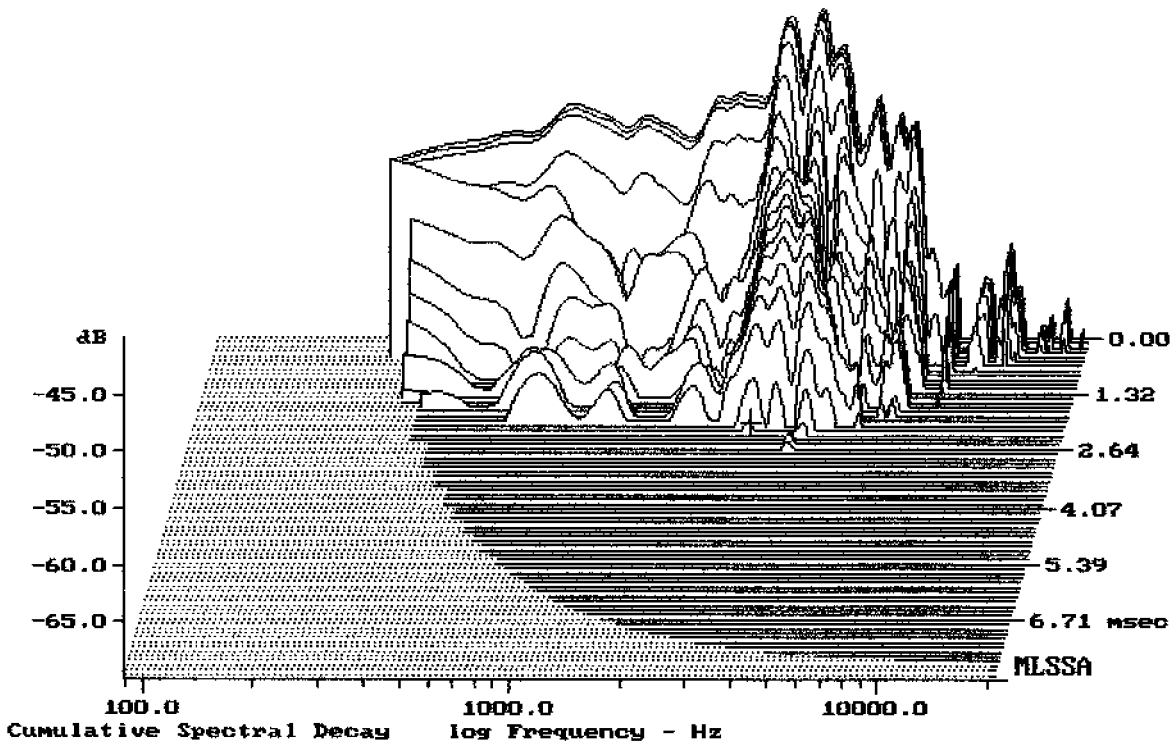

-69.23 dB, 2930 Hz (66), 2.200 msec (21)