

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.81	Ohms
2	Fs	47.54	Hz
3	Re	5.60	Ohms[dc]
4	Res	151.85	Ohms
5	Qms	5.82	
6	Qes	0.21	
7	Qts	0.21	
8	L1	0.68	mH
9	L2	1.37	mH
10	R2	2.78	Ohms
11	RMSE-load	0.43	Ohms
12	Vas(Sd)	68.54	liters
13	Mms	30.27	grams
14	Cms	370	$\mu$ M/Newton
15	B1	15.36	Tesla-M
16	SPLref(Sd)	97.2	dB[Re]
17	Rub-index	0.00	


Method: Mass-loaded (40.00 grams)

Area (Sd): 363.05 sq cm

DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.5% (-20% to -50% is recommended).

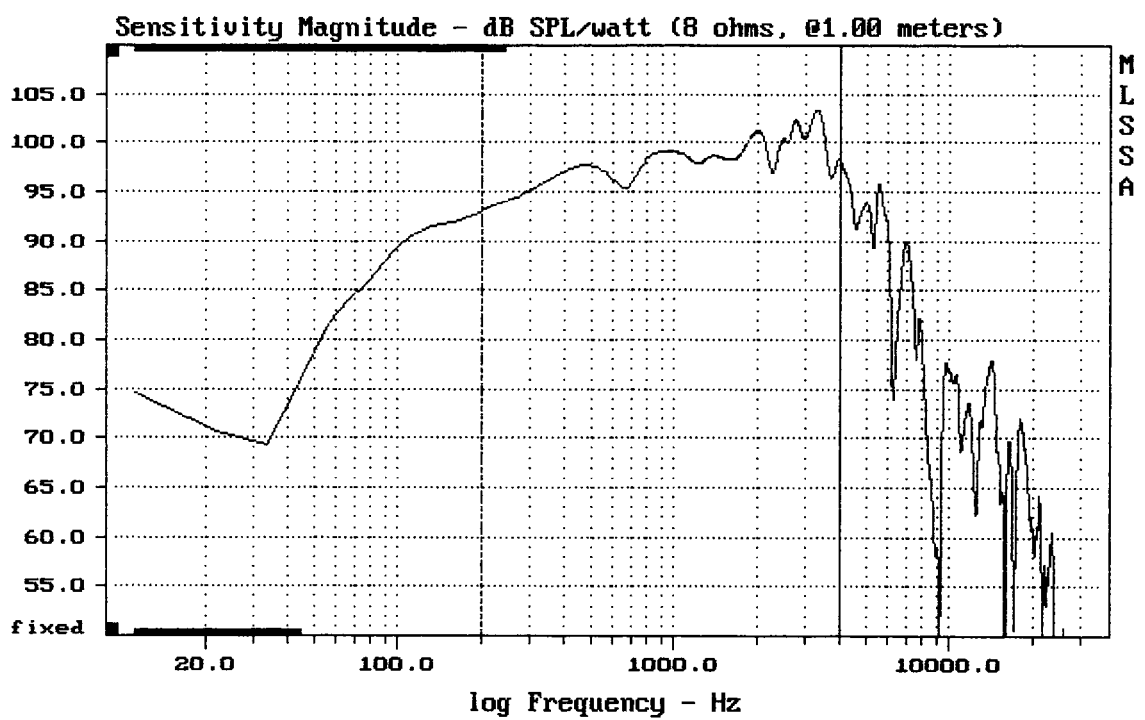


---

Level (200:4006 Hz) = 98.36 dB SPL/watt (8 ohms, @1.00 meters)

---

BEYMA 10M250