

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.36	Ohms
2	Fs	66.23	Hz
3	Re	6.09	Ohms[dc]
4	Res	74.69	Ohms
5	Qms	6.38	
6	Qes	0.52	
7	Qts	0.48	
8	L1	0.52	mH
9	L2	1.09	mH
10	R2	6.10	Ohms
11	RMSE-load	0.69	Ohms
12	Vas(Sd)	33.49	liters
13	Mms	29.05	grams
14	Cms	199	$\mu\text{M}/\text{Newton}$
15	B1	11.90	Tesla-M
16	SPLref(Sd)	94.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.3% (-20% to -50% is recommended).


P10-100

MLSSA: Parameters

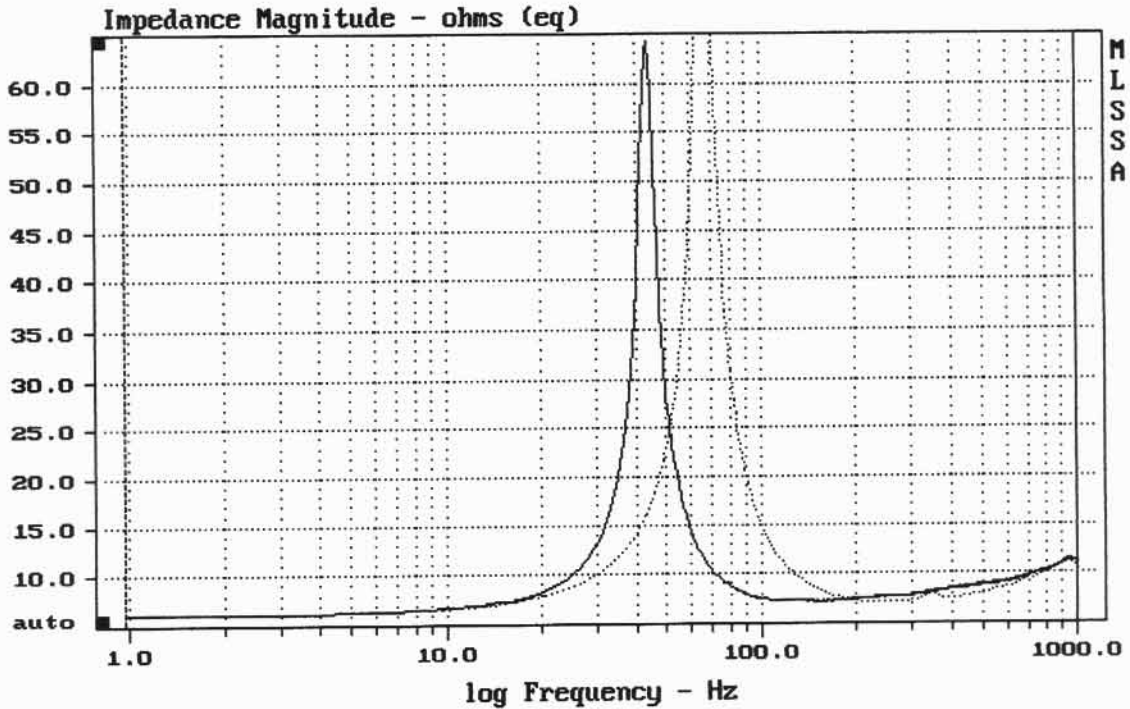

mean: 10.44, rms: 13.13, std: 7.964, max: 81.21, min: 6.167

MLSSA: Frequency Domain

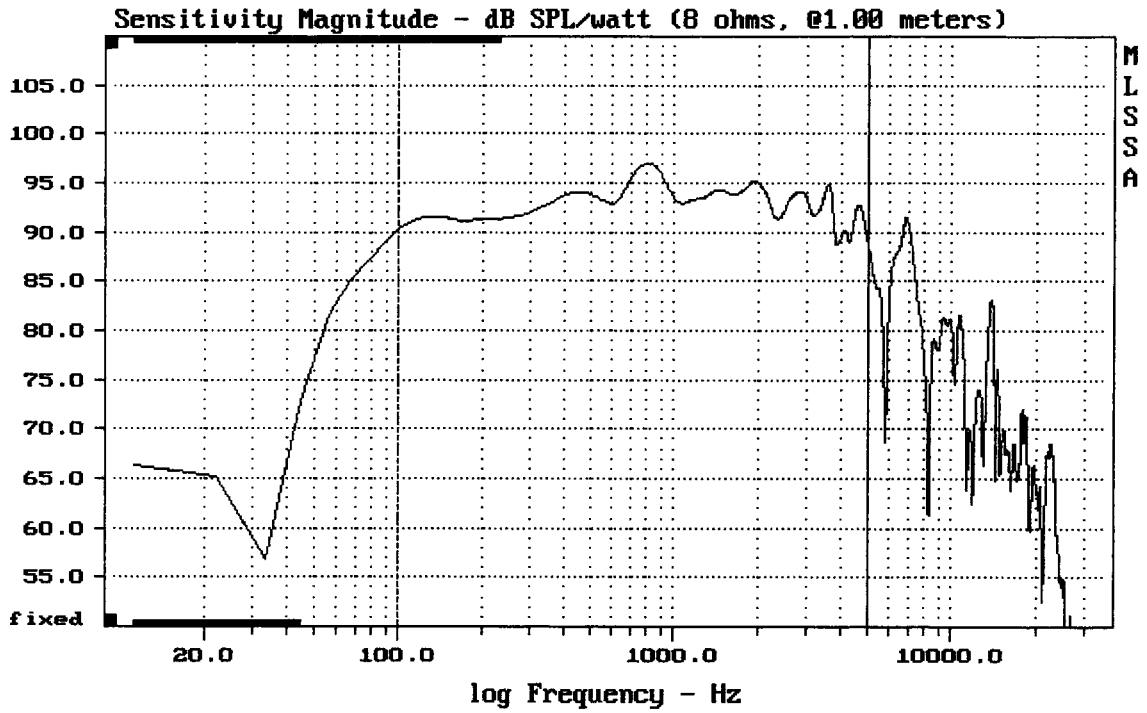



---

Level (100:4994 Hz) = 93.19 dB SPL/watt (8 ohms, @1.00 meters)

---

P.D.10-100

MLSSA: Frequency Domain

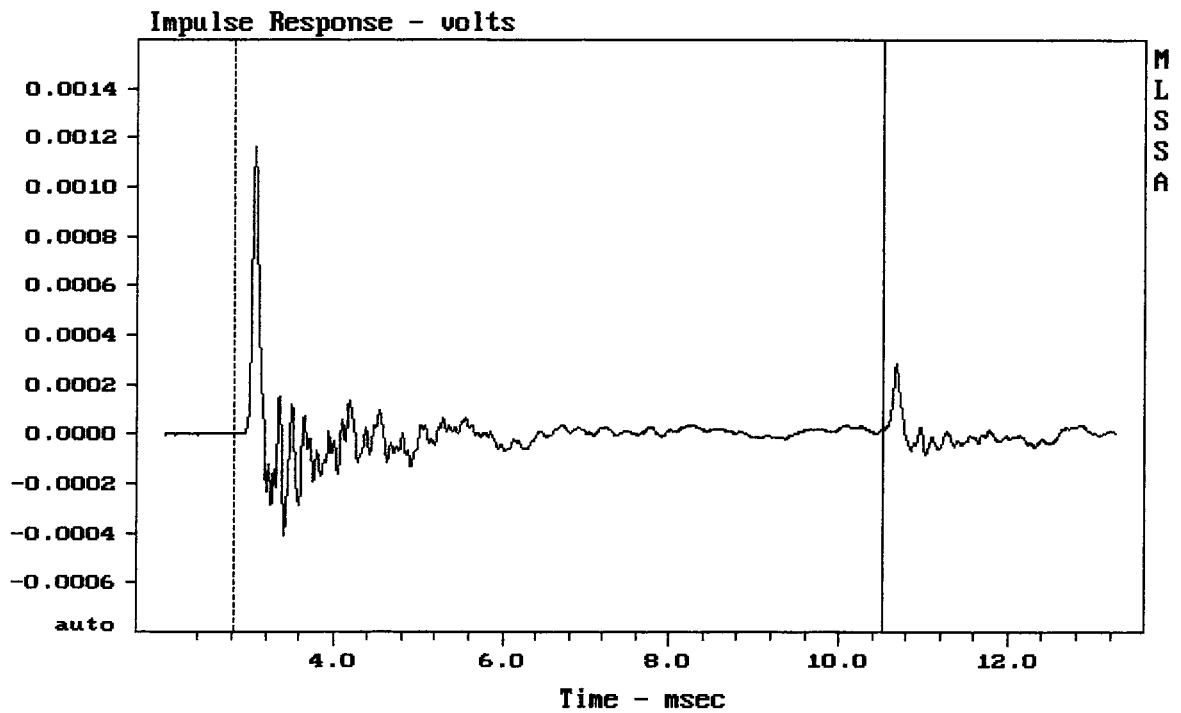


---

CURSOR: y = 2.06212e-005 x = 10.5270 (957)

---

P.D.10-100