


Level (100:5005 Hz) = 98.39 dB SPL/watt (8 ohms, @1.00 meters)

DELTALITE-II 2510

MLSSA: Frequency Domain

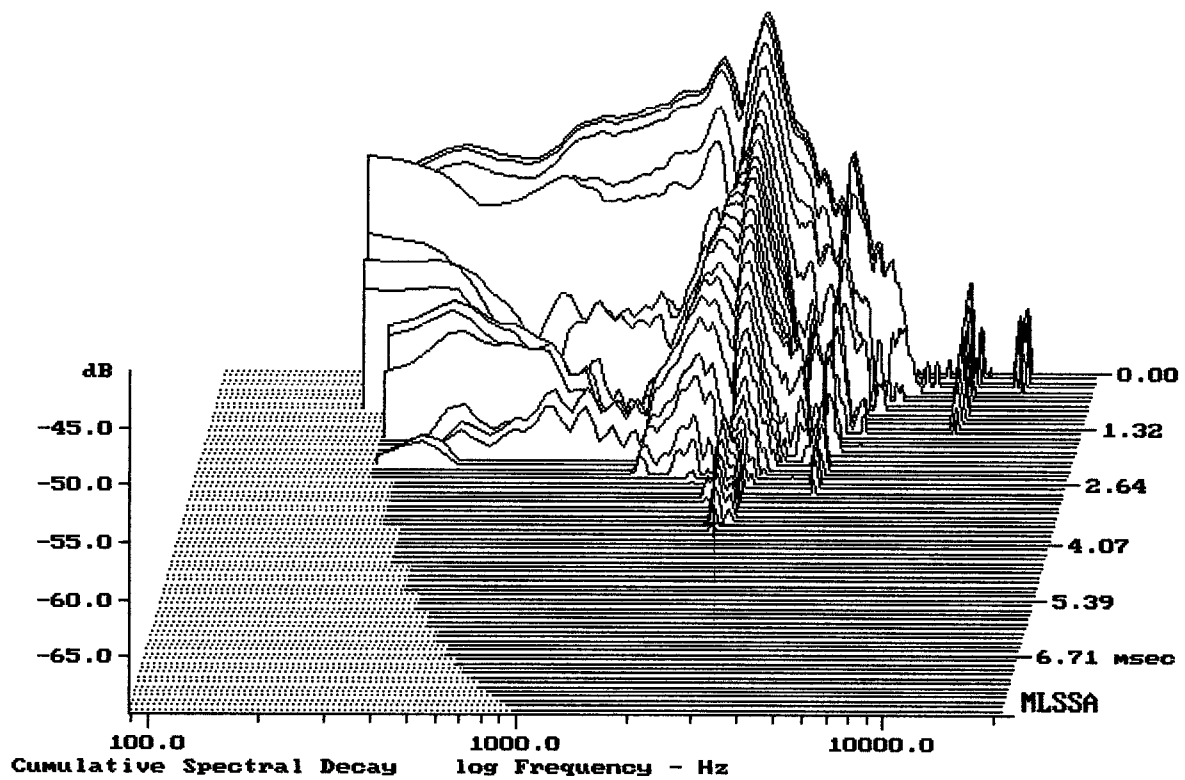

-69.30 dB, 2486 Hz (56), 3.740 msec (35)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.22	Ohms
2	Fs	53.41	Hz
3	Re	4.86	Ohms[dc]
4	Res	72.19	Ohms
5	Qms	6.01	
6	Qes	0.41	
7	Qts	0.38	
8	L1	0.37	mH
9	L2	0.64	mH
10	R2	2.23	Ohms
11	RMSE-load	0.36	Ohms
12	Vas(Sd)	50.91	liters
13	Mms	29.39	grams
14	Cms	302	$\mu\text{M}/\text{Newton}$
15	Bl	10.88	Tesla-M
16	SPLref(Sd)	94.6	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.0% (-20% to -50% is recommended).

DELTALITE-II 2510

MLSSA: Parameters

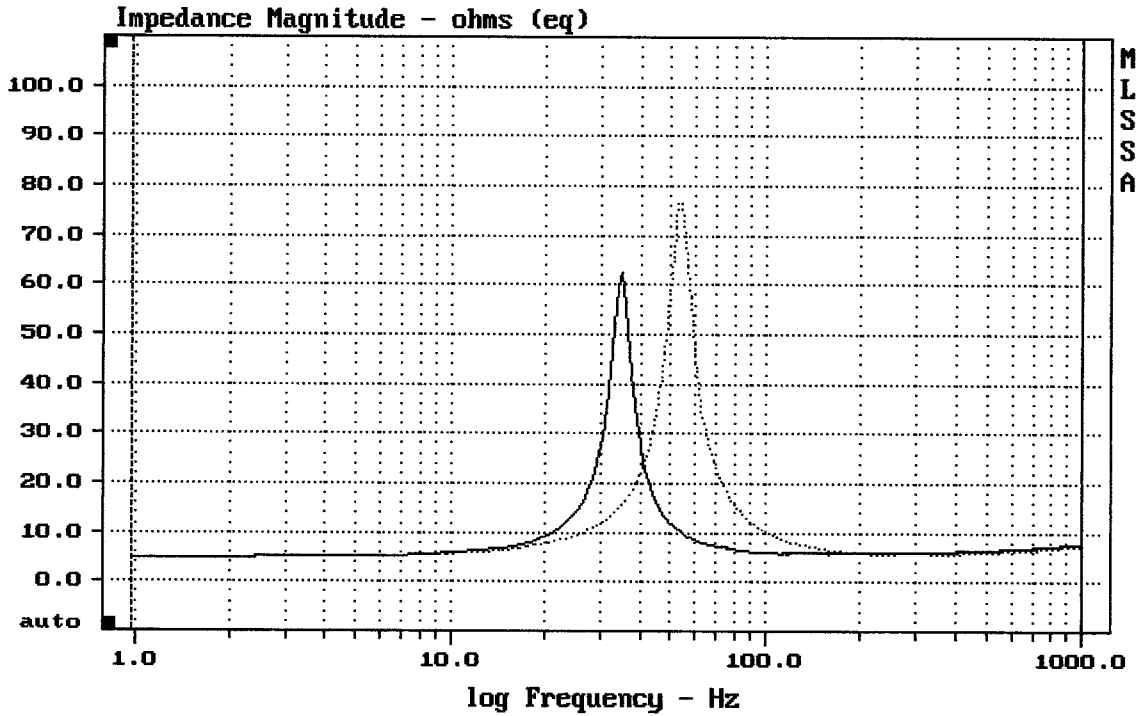

mean: 7.946, rms: 10.81, std: 7.33, max: 76.58, min: 4.958

MLSSA: Frequency Domain