

Measured Data			
Line	Parameter	Value	Units
1	RMSE-free	0.43	Ohms
2	Fs	45.49	Hz
3	Re	5.86	Ohms[dc]
4	Res	78.99	Ohms
5	Qms	5.85	
6	Qes	0.43	
7	Qts	0.40	
8	L1	0.39	mH
9	L2	1.10	mH
10	R2	7.22	Ohms
11	RMSE-load	0.31	Ohms
12	Vas(Sd)	78.60	liters
13	Mms	26.24	grams
14	Cms	466	$\mu\text{M}/\text{Newton}$
15	B1	10.06	Tesla-M
16	SPLref(Sd)	94.1	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.27 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.8% (-20% to -50% is recommended).


VOLT Ps 10/175

MLSSA: Parameters

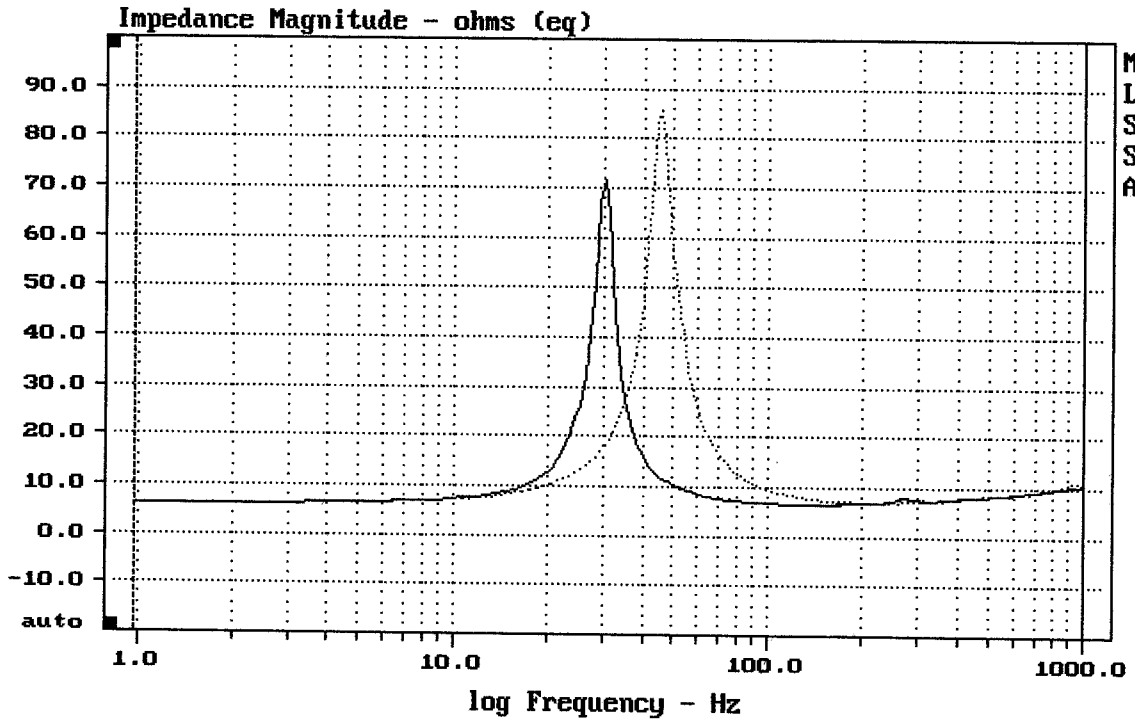

CURSOR: dy = 0.281675 x = 1000.9766 (1025)

MLSSA: Frequency Domain

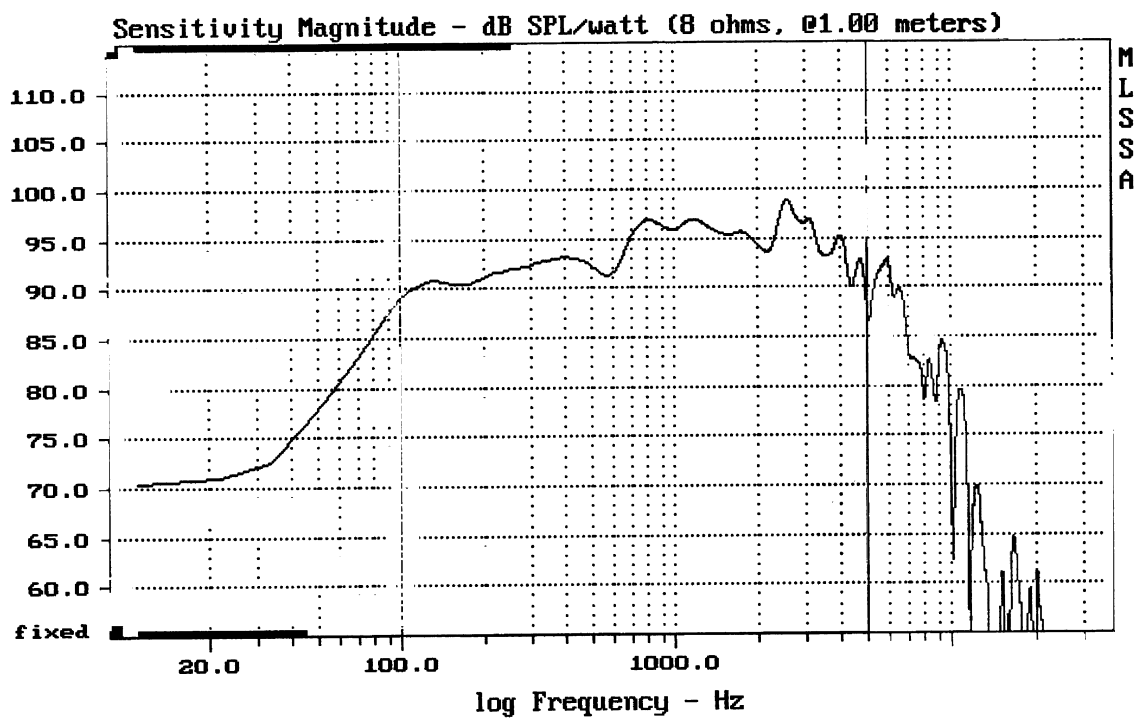


---

Level (100:5005 Hz) = 94.17 dB SPL/watt (8 ohms, @1.00 meters)

---

VOLT PS10/175