

## MLSSA SPO 4.0D #960903-3057-3075

## Measured Data

## QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.89	Ohms
2	Fs	54.89	Hz
3	Re	4.92	Ohms[dc]
4	Res	13.67	Ohms
5	Qms	0.59	
6	Qes	0.21	
7	Qts	0.16	
8	L1	-0.01	mH
9	L2	0.80	mH
10	R2	15.78	Ohms
11	RMSE-load	1.21	Ohms
12	Vas(Sd)	60.84	liters
13	Mms	23.29	grams
14	Cms	361	$\mu$ M/Newton
15	Bl	13.69	Tesla-M
16	SPLref(Sd)	98.6	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (50.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.26 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -42.2% (-20% to -50% is recommended).

VOLT M2500.1 8ohm

MLSSA: Parameters

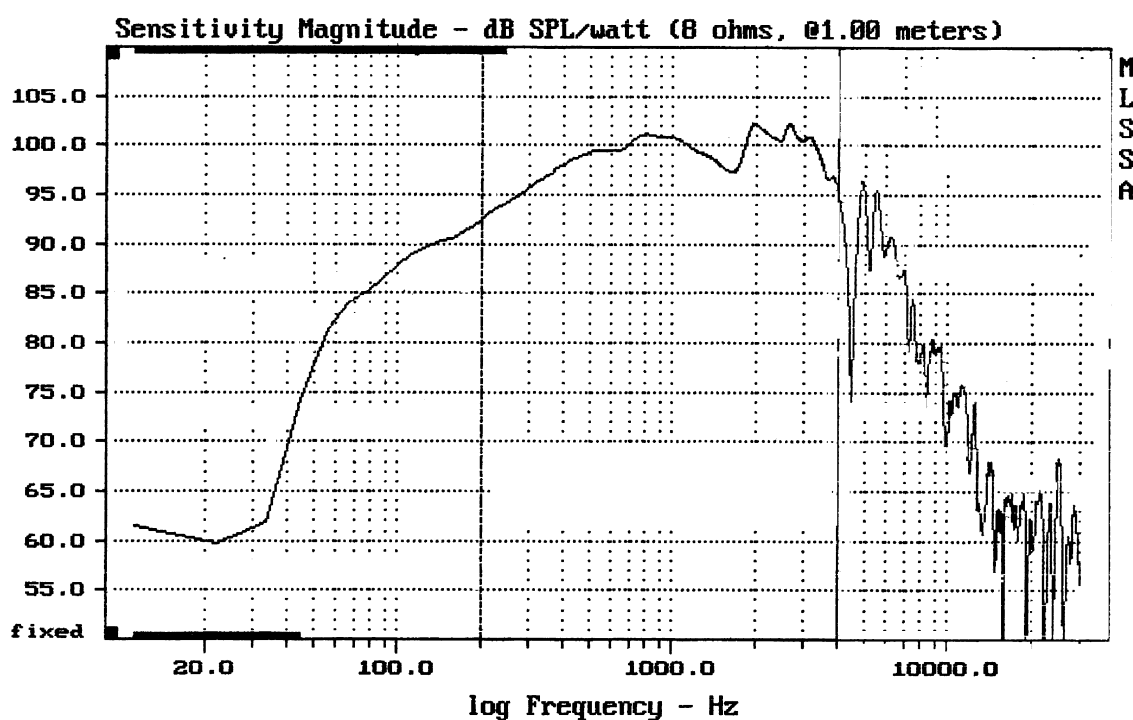

Level (200:3995 Hz) = 99.25 dB SPL/watt (8 ohms, @1.00 meters)

VOLT M2500.1