

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.48	Ohms
2	Fs	67.75	Hz
3	Re	5.37	Ohms[dc]
4	Res	126.09	Ohms
5	Qms	7.32	
6	Qes	0.31	
7	Qts	0.30	
8	L1	0.61	mH
9	L2	1.12	mH
10	R2	3.08	Ohms
11	RMSE-load	0.66	Ohms
12	Vas(Sd)	36.82	liters
13	Mms	22.93	grams
14	Cms	241	$\mu\text{M}/\text{Newton}$
15	Bl	12.96	Tesla-M
16	SPLref(Sd)	97.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 330.06 sq cm


DCR mode: Measure (-0.27 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -51.1% (-20% to -50% is recommended).


250AMX

MLSSA: Parameters

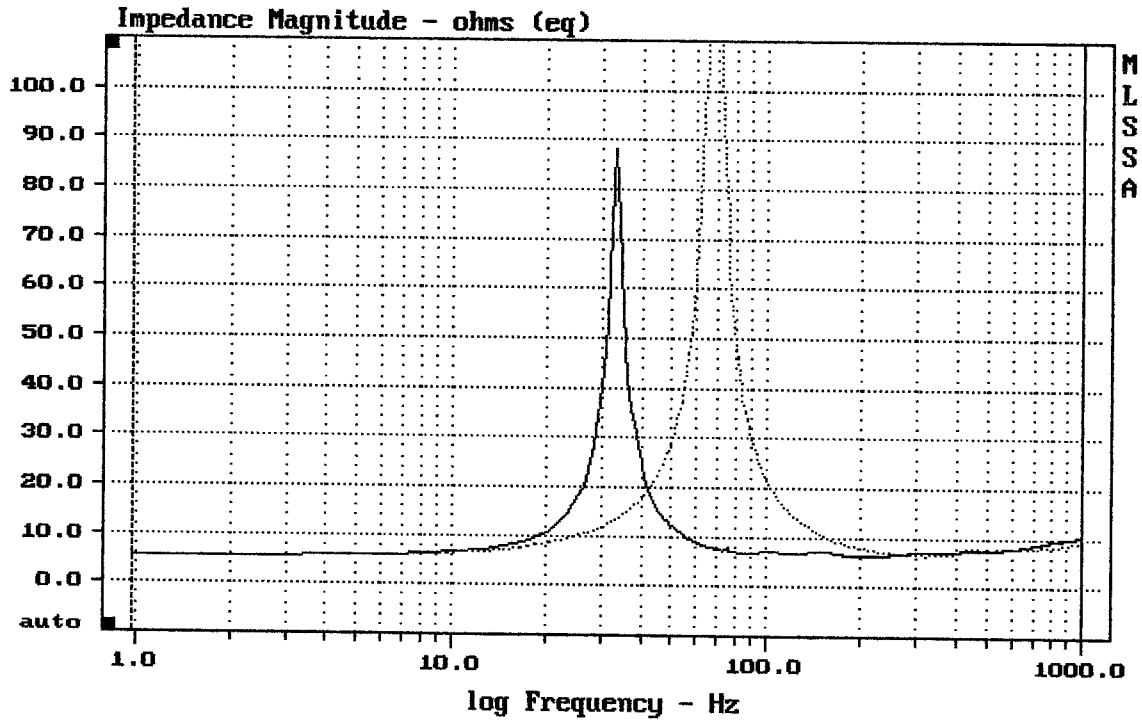

CURSOR: dy = -0.953661 x = 1000.9766 (1025)

MLSSA: Frequency Domain

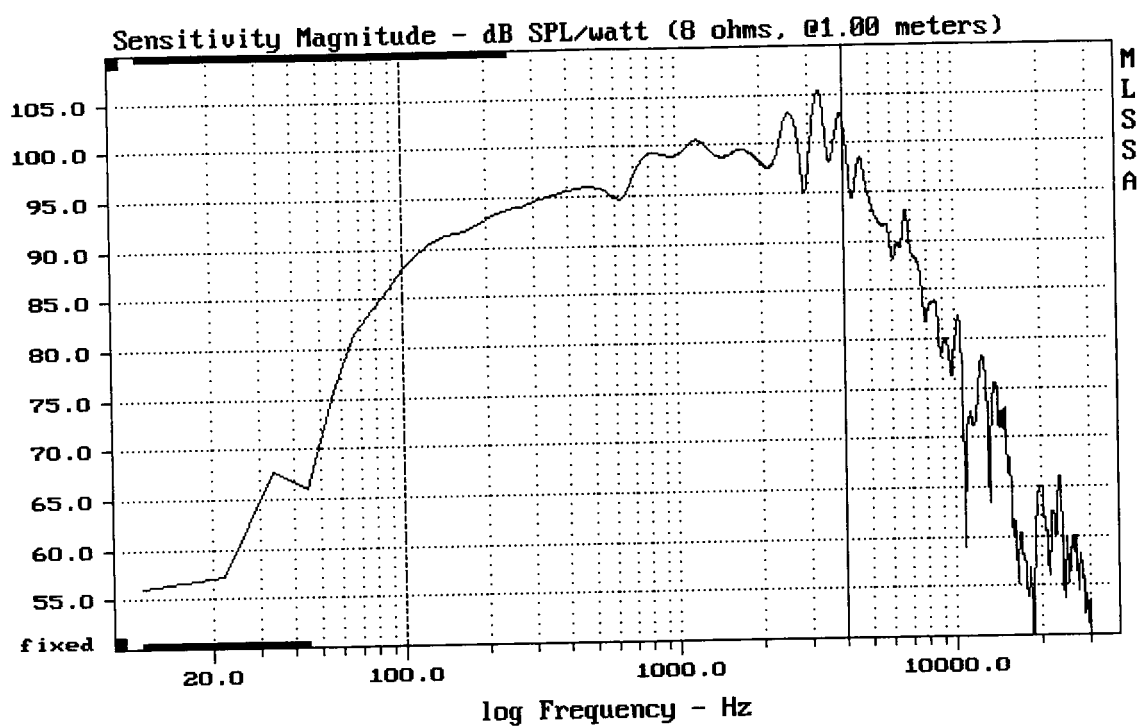


---

Level (100:4017 Hz) = 97.86 dB SPL/watt (8 ohms, @1.00 meters)

---

B+C 250 AMX