

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.35	Ohms
2	Fs	63.44	Hz
3	Re	5.70	Ohms[dc]
4	Res	70.87	Ohms
5	Qms	5.46	
6	Qes	0.44	
7	Qts	0.41	
8	L1	0.91	mH
9	L2	1.53	mH
10	R2	6.48	Ohms
11	RMSE-load	0.61	Ohms
12	Vas(Sd)	31.18	liters
13	Mms	34.00	grams
14	Cms	185	$\mu\text{M}/\text{Newton}$
15	B1	13.26	Tesla-M
16	SPLref(Sd)	94.4	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.09 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.6% (-20% to -50% is recommended).


DX10

MLSSA: Parameters

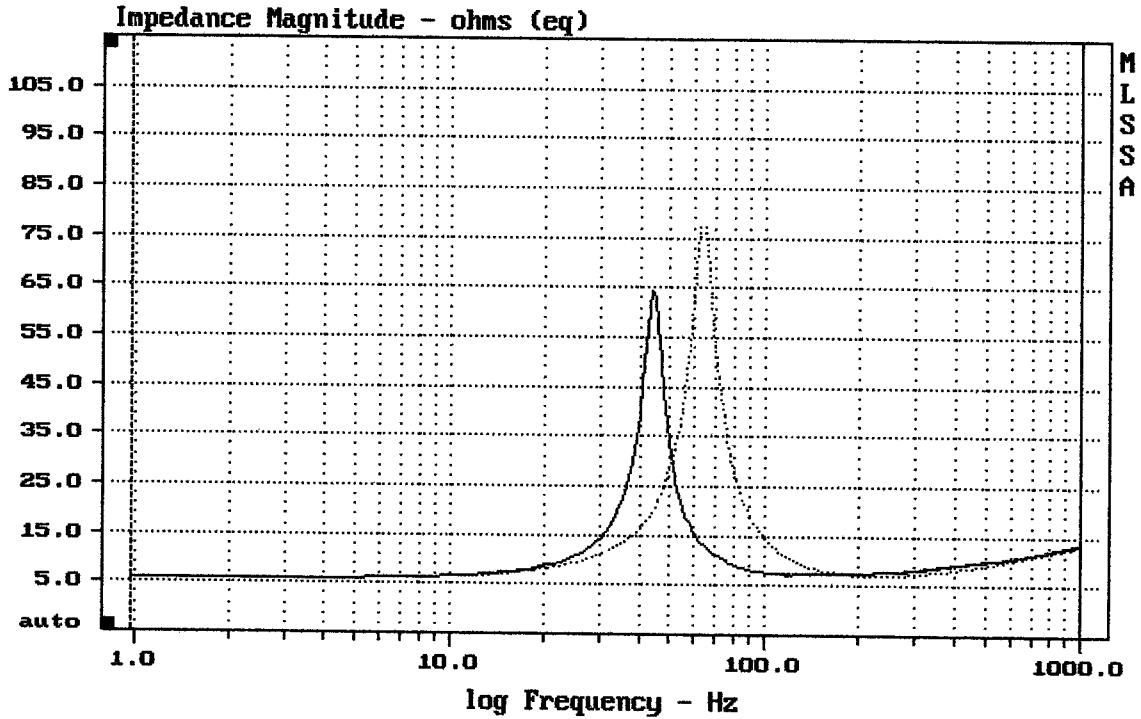

CURSOR: dy = -0.372423 x = 1000.9766 (1025)

MLSSA: Frequency Domain

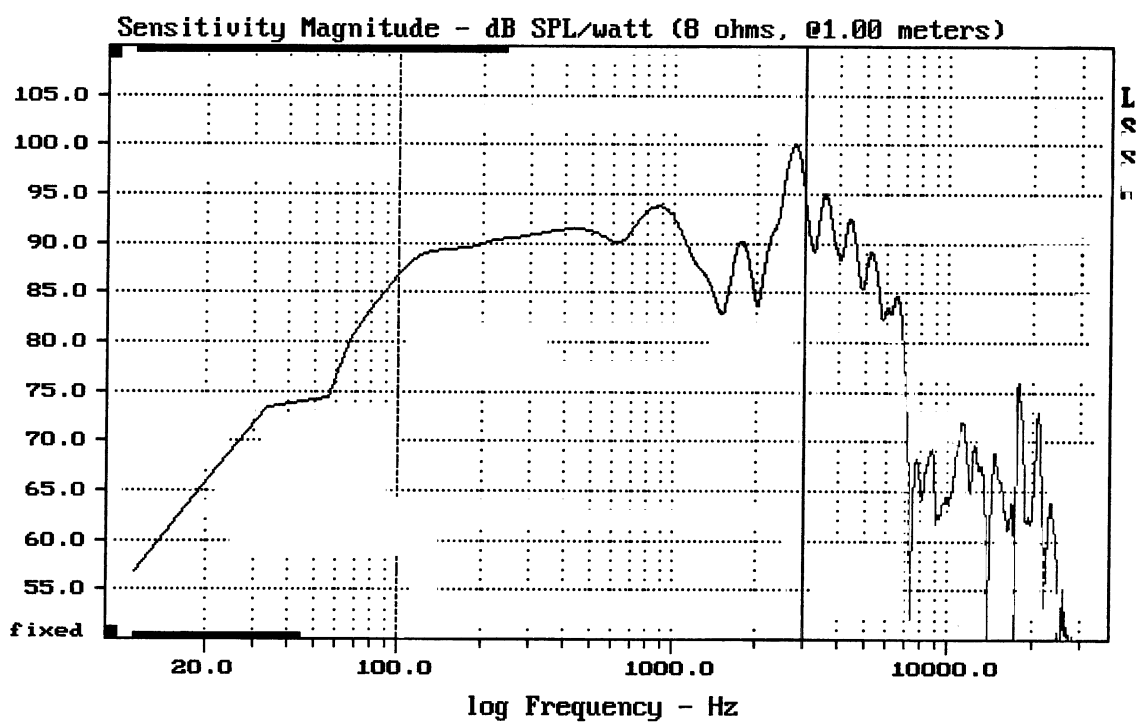

Level (100:2985 Hz) = 91.47 dB SPL/watt (8 ohms, @1.00 meters)

FANE DX10