


Level (89:6303 Hz) = 99.11 dB SPL/watt (8 ohms, @1.00 meters)

FANE CLASSIC 10/100

MLSSA: Frequency Domain

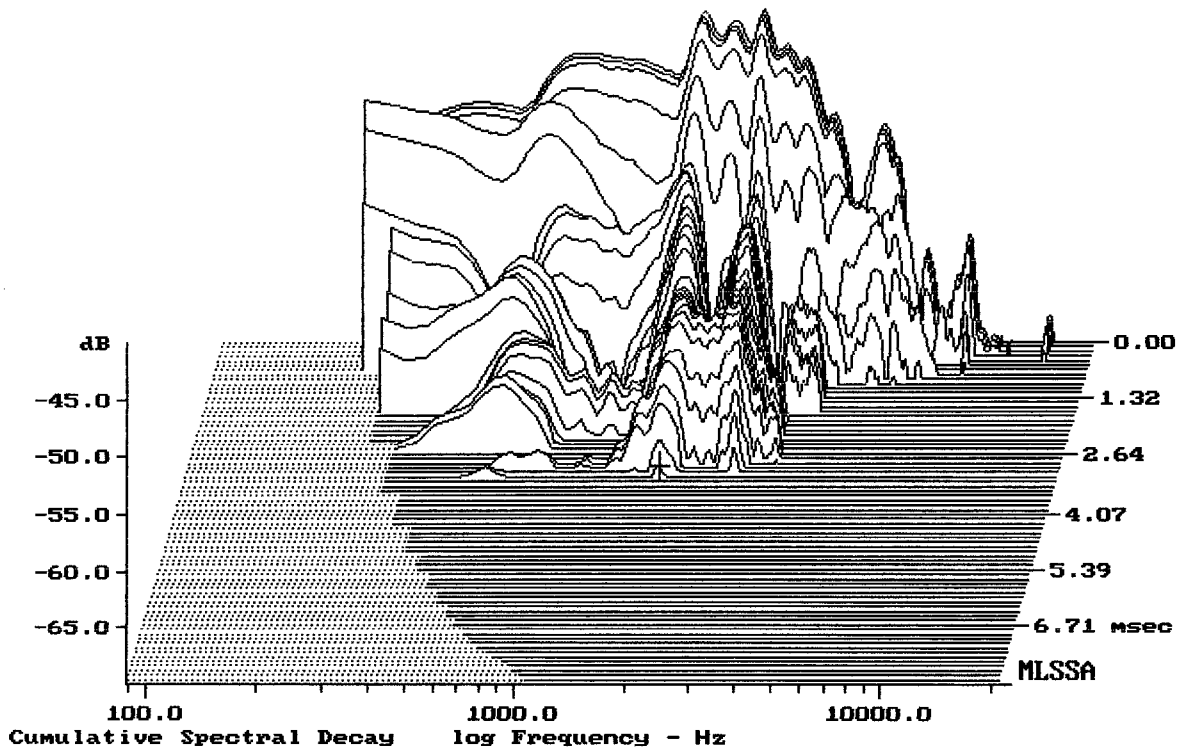

-69.00 dB, 1731 Hz (39), 3.190 msec (30)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.50	Ohms
2	Fs	110.05	Hz
3	Re	5.87	Ohms[dc]
4	Res	85.21	Ohms
5	Qms	11.25	
6	Qes	0.77	
7	Qts	0.72	
8	L1	0.25	mH
9	L2	0.67	mH
10	R2	4.95	Ohms
11	RMSE-load	1.87	Ohms
12	Vas(Sd)	34.16	liters
13	Mms	12.43	grams
14	Cms	168	$\mu\text{M}/\text{Newton}$
15	Bl	8.07	Tesla-M
16	SPLref(Sd)	99.5	dB[Re]
17	Rub-index	0.50	

Method: Mass-loaded (40.00 grams)

Area (Sd): 380.13 sq cm


DCR mode: Measure (-0.10 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -44.9% (-20% to -50% is recommended).

FANE CLASSIC 10/100

MLSSA: Parameters

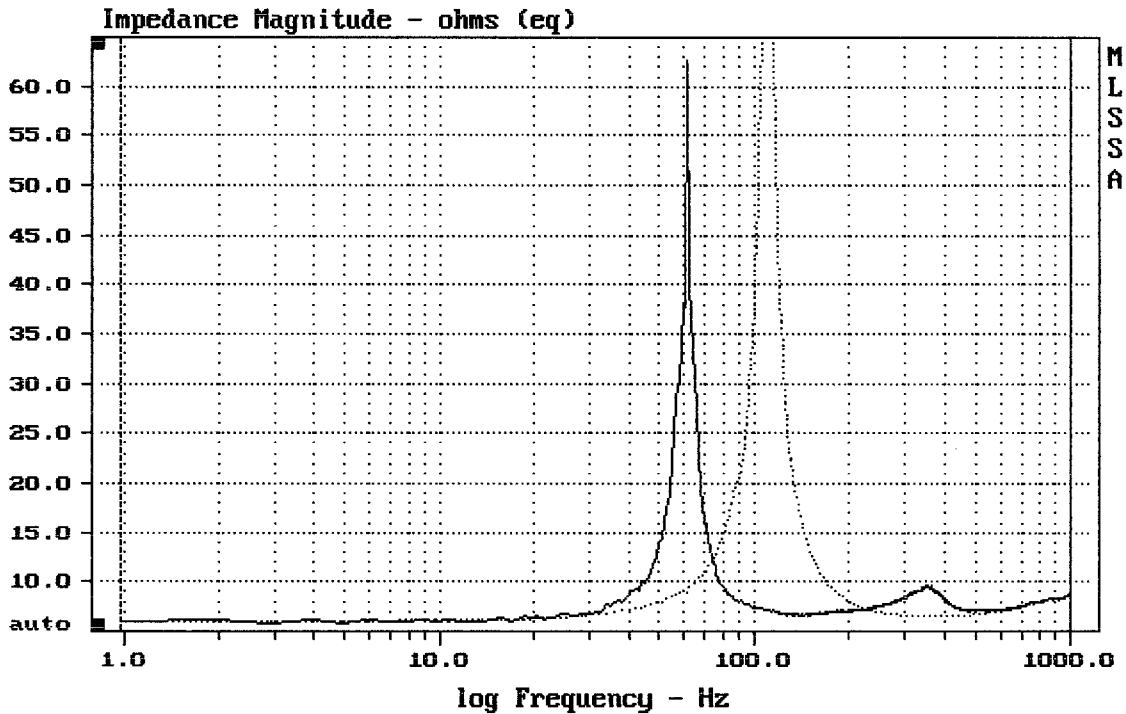

mean: 9.373, rms: 13.07, std: 9.115, max: 94.28, min: 5.922

MLSSA: Frequency Domain