


Level (55:2497 Hz) = 95.53 dB SPL/watt (8 ohms, @1.50 meters)


COLOSSUS 18-1000

11-22-88 12:38 AM

MLSSA: Frequency Domain

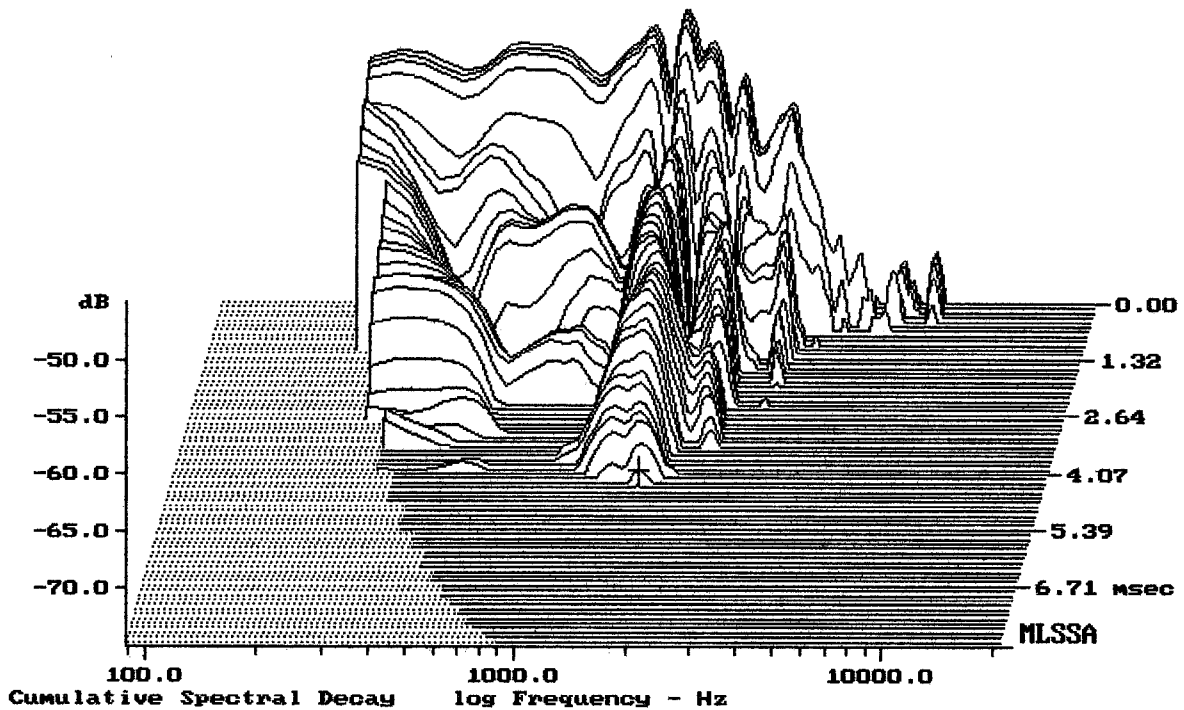

-73.91 dB, 1642 Hz (37), 4.290 msec (40)

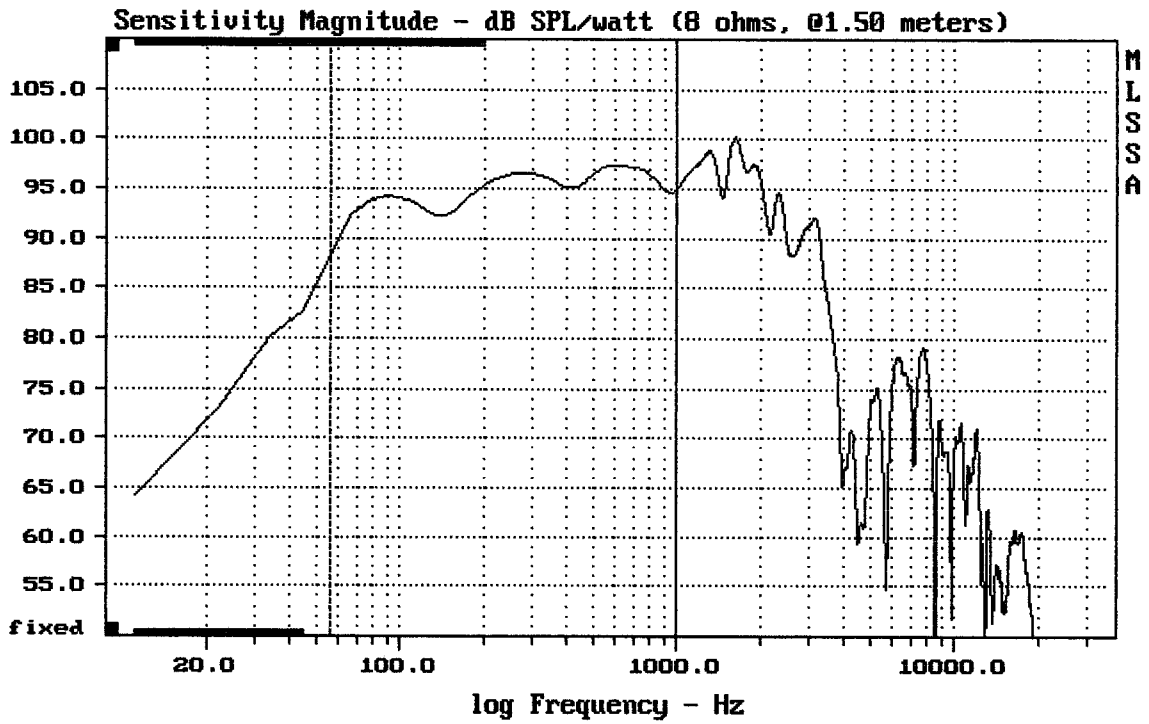


Level (55:999 Hz) = 95.06 dB SPL/watt (8 ohms, @1.50 meters)

COLOSSUS 18-1000

11-22-88 12:40 AM

MLSSA: Frequency Domain

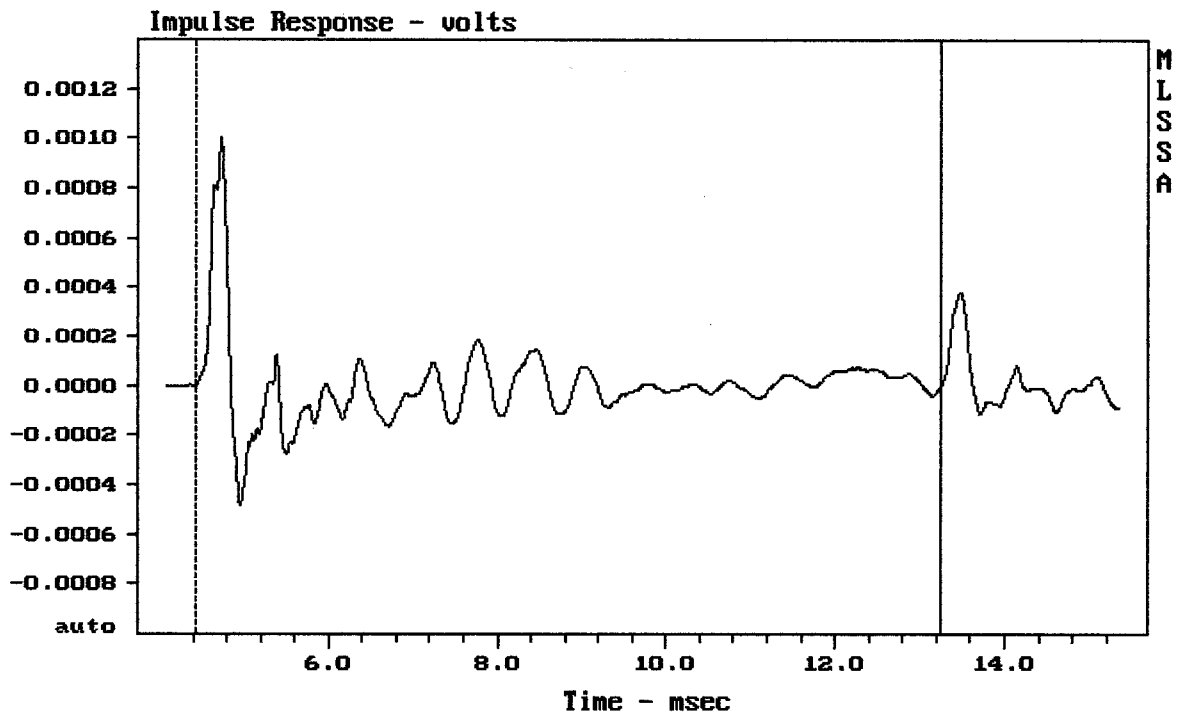

mean: 3.579e-007, rms: 0.0001586, std: 0.0001586, max: 0.001006, min: -0.00048

COLOSSUS 18-1000

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon
 Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.68	Ohms
2	Fs	37.56	Hz
3	Re	6.02	Ohms[dc]
4	Res	203.55	Ohms
5	Qms	15.91	
6	Qes	0.47	
7	Qts	0.46	
8	L1	1.19	mH
9	L2	1.82	mH
10	R2	6.09	Ohms
11	RMSE-load	0.99	Ohms
12	Vas(Sd)	186.57	liters
13	Mms	173.84	grams
14	Cms	103	$\mu\text{M}/\text{Newton}$
15	B1	22.91	Tesla-M
16	SPLref(Sd)	95.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.3% (-20% to -50% is recommended).

FANE COL 18-1000

MLSSA: Parameters

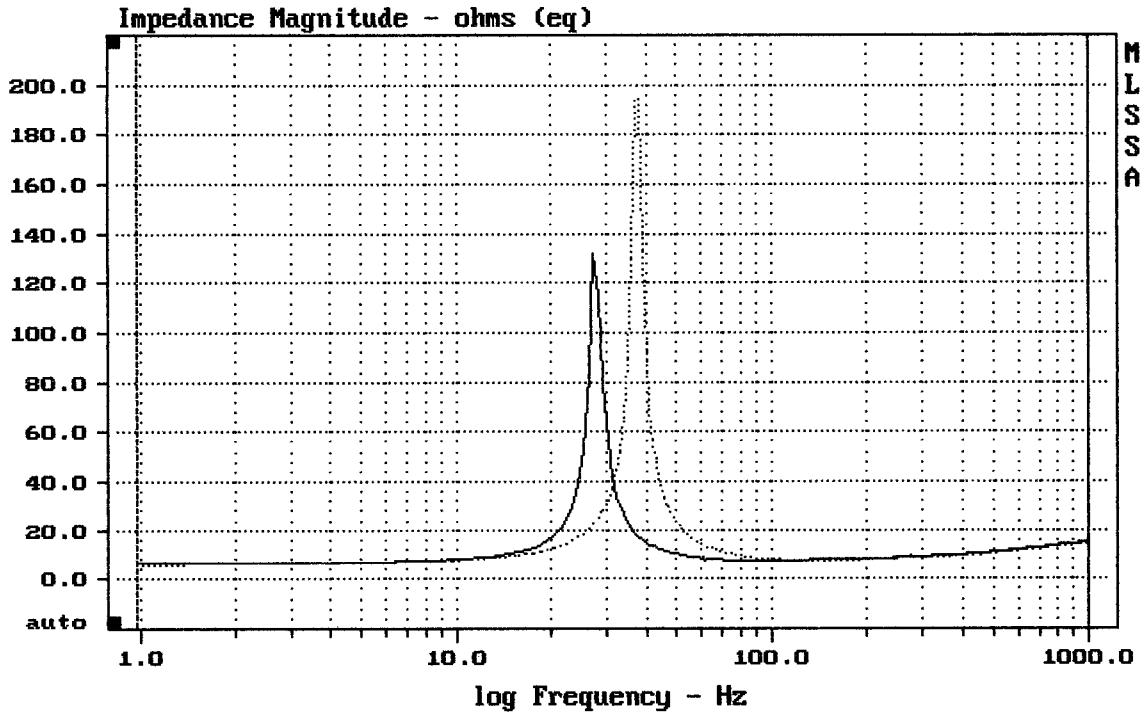

mean: 12.25, rms: 16.66, std: 11.3, max: 194.8, min: 6.073

DTTO

11-20-88 7:29 PM

MLSSA: Frequency Domain