


Level (100:1998 Hz) = 94.86 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE KAPPA PRO 10

MLSSA: Frequency Domain

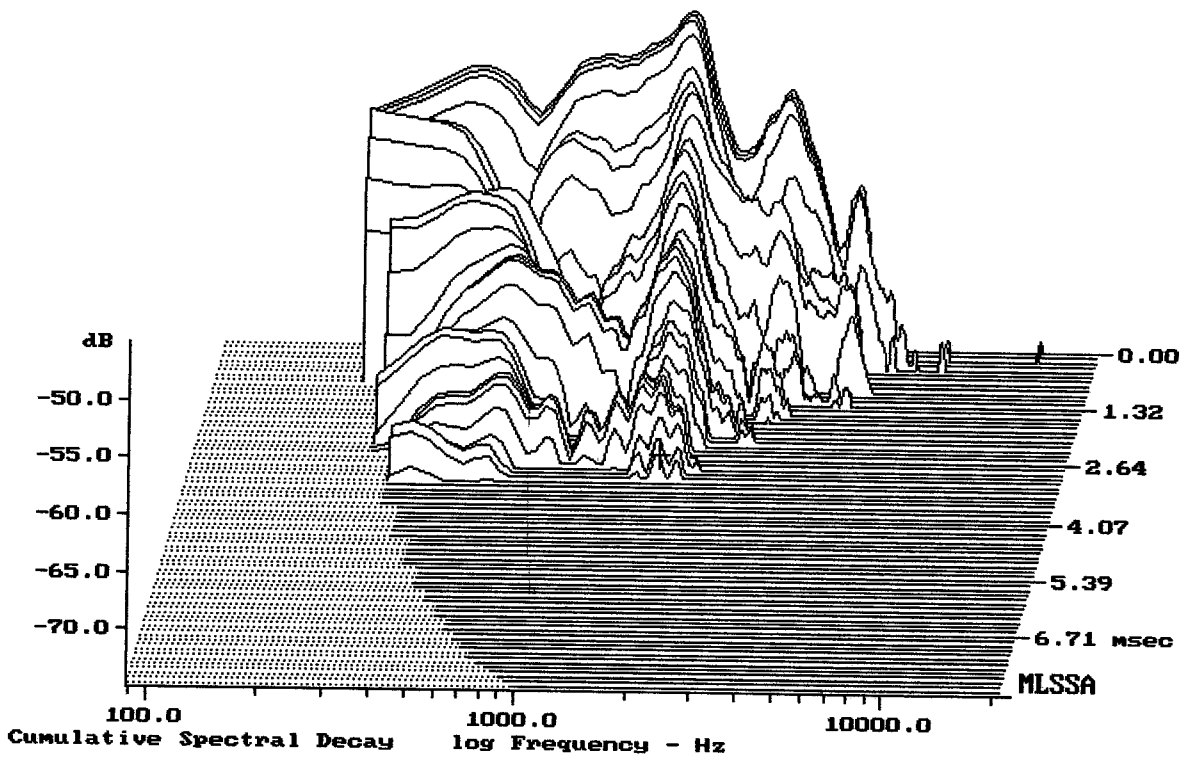

-72.90 dB, 1687 Hz (38), 3.080 msec (29)

Line	Parameter	Value	Units
1	RMSE-free	0.92	Ohms
2	Fs	39.00	Hz
3	Re	6.67	Ohms[dc]
4	Res	310.83	Ohms
5	Qms	6.95	
6	Qes	0.15	
7	Qts	0.15	
8	L1	1.37	mH
9	L2	2.20	mH
10	R2	5.13	Ohms
11	RMSE-load	0.67	Ohms
12	Vas(Sd)	78.77	liters
13	Mms	35.63	grams
14	Cms	468	$\mu$ M/Newton
15	B1	19.77	Tesla-M
16	SPLref(Sd)	96.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.5% (-20% to -50% is recommended).

EMINENCE KAPPA PRO 10

MLSSA: Parameters

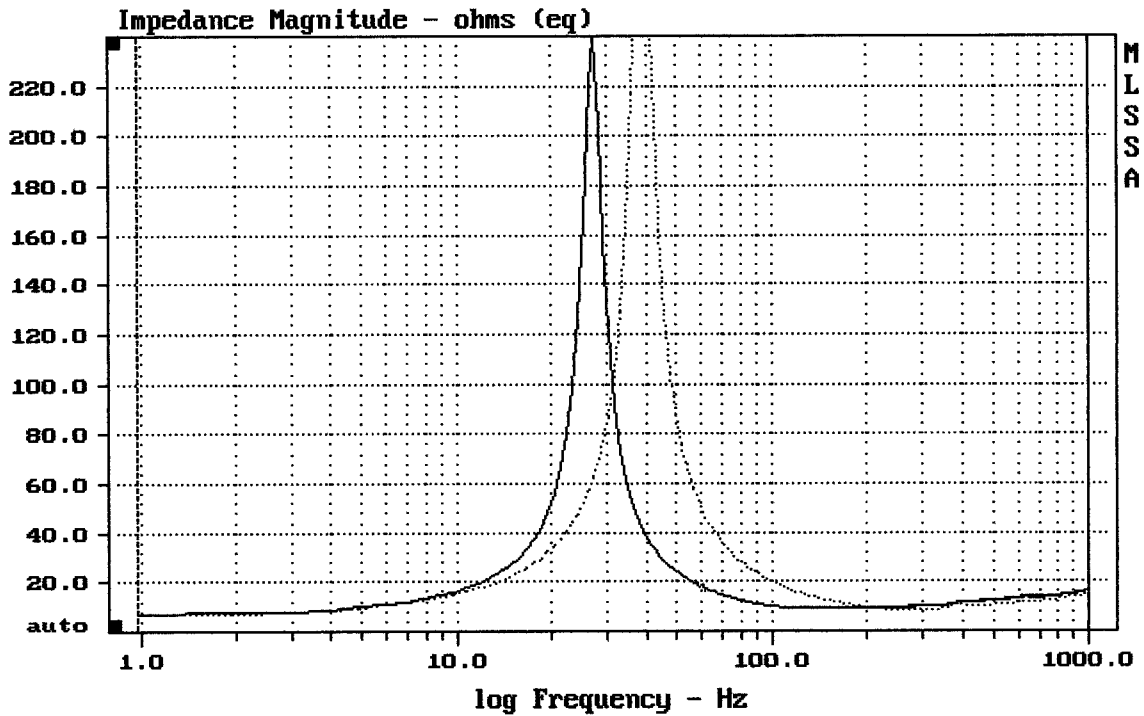

mean: 16.68, rms: 31.21, std: 26.38, max: 317, min: 6.991

MLSSA: Frequency Domain