


Level (100.4605 Hz) = 94.25 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE ALPHA 10

MLSSA: Frequency Domain

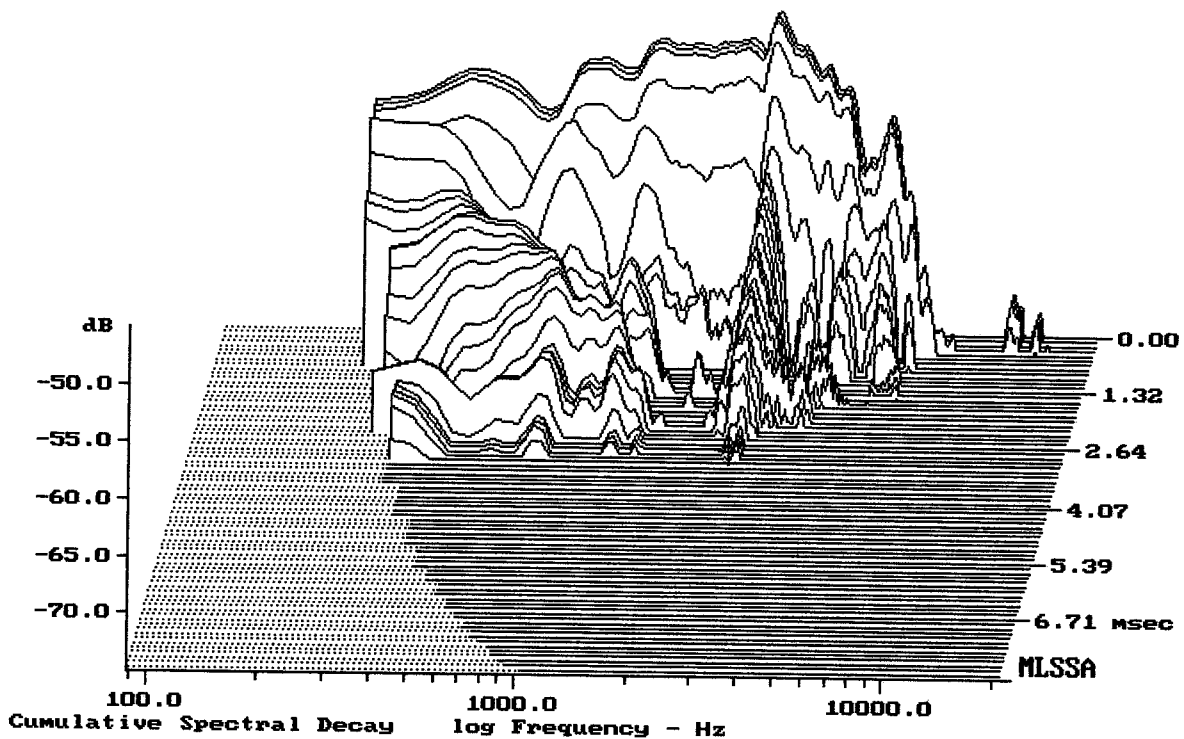

-74.82 dB, 2575 Hz (58), 2.860 msec (27)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.20	Ohms
2	Fs	47.05	Hz
3	Re	5.34	Ohms[dc]
4	Res	52.06	Ohms
5	Qms	5.81	
6	Qes	0.60	
7	Qts	0.54	
8	L1	0.69	mH
9	L2	0.82	mH
10	R2	2.95	Ohms
11	RMSE-load	0.21	Ohms
12	Vas(Sd)	83.86	liters
13	Mms	22.99	grams
14	Cms	498	$\mu\text{M}/\text{Newton}$
15	B1	7.80	Tesla-M
16	SPLref(Sd)	93.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (30.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.9% (-20% to -50% is recommended).

EMINENCE ALPHA 10

MLSSA: Parameters

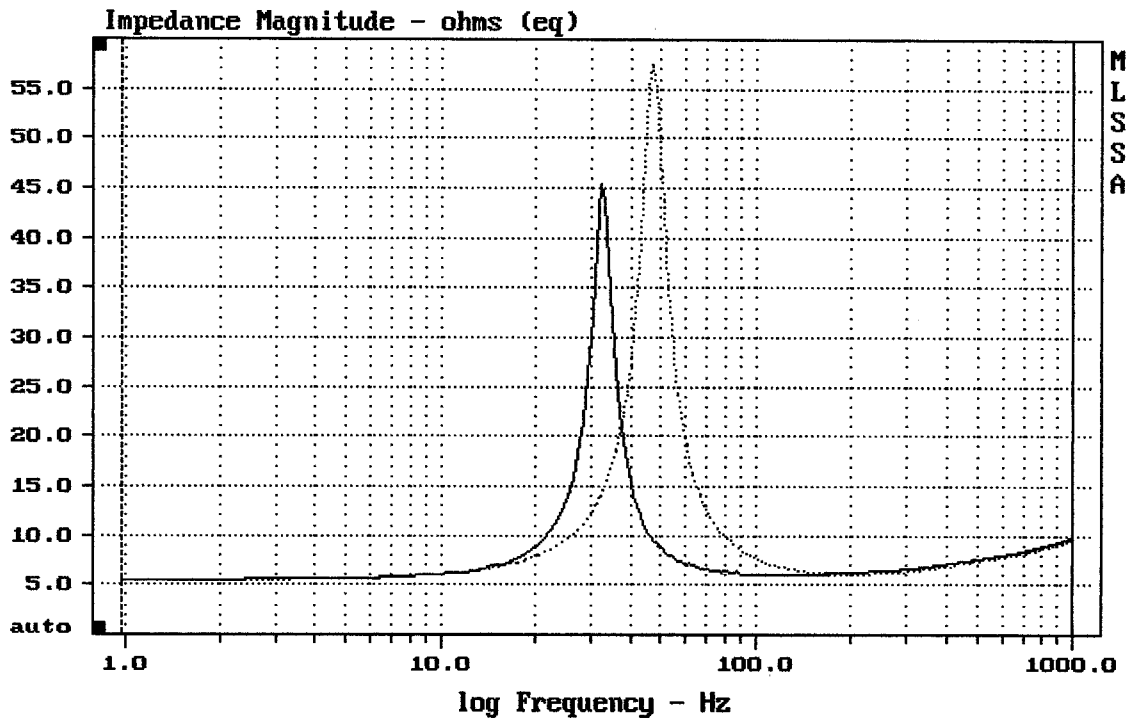

mean: 8.437, rms: 9.74, std: 4.867, max: 57.53, min: 5.476

MLSSA: Frequency Domain