



Level (100:4006 Hz) = 93.26 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE BETA 10CX

MLSSA: Frequency Domain

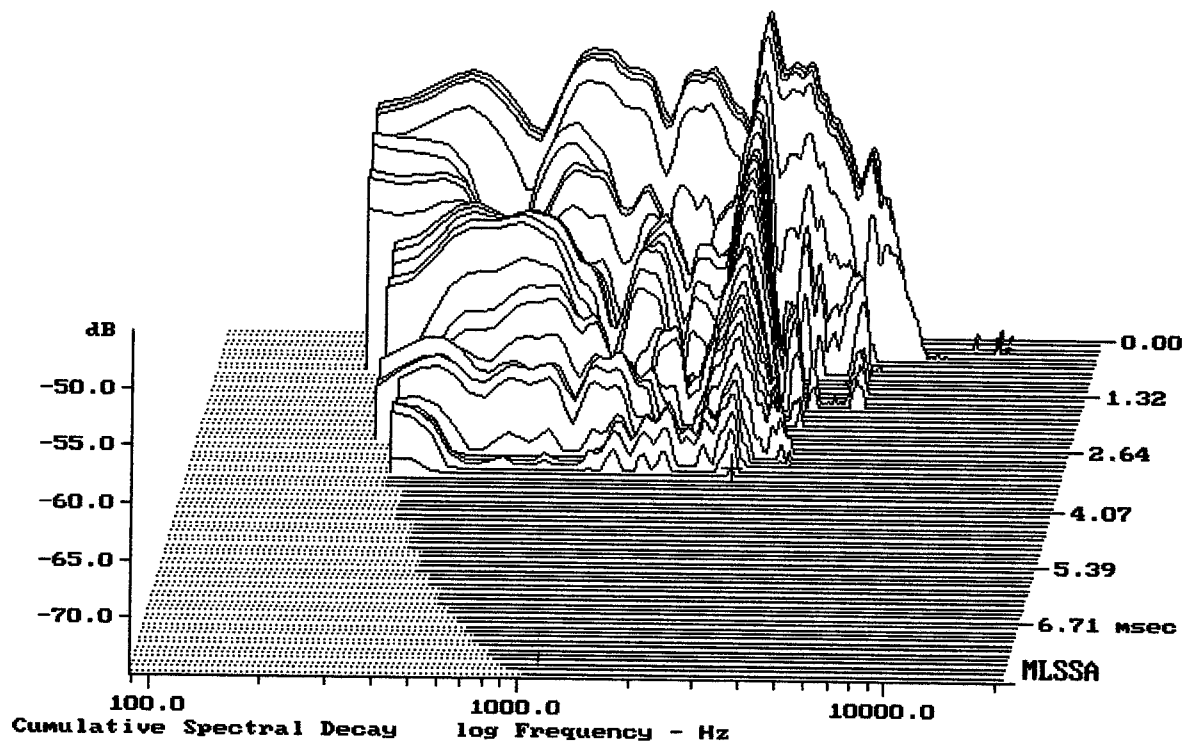


-74.31 dB, 2663 Hz (60), 3.300 msec (31)

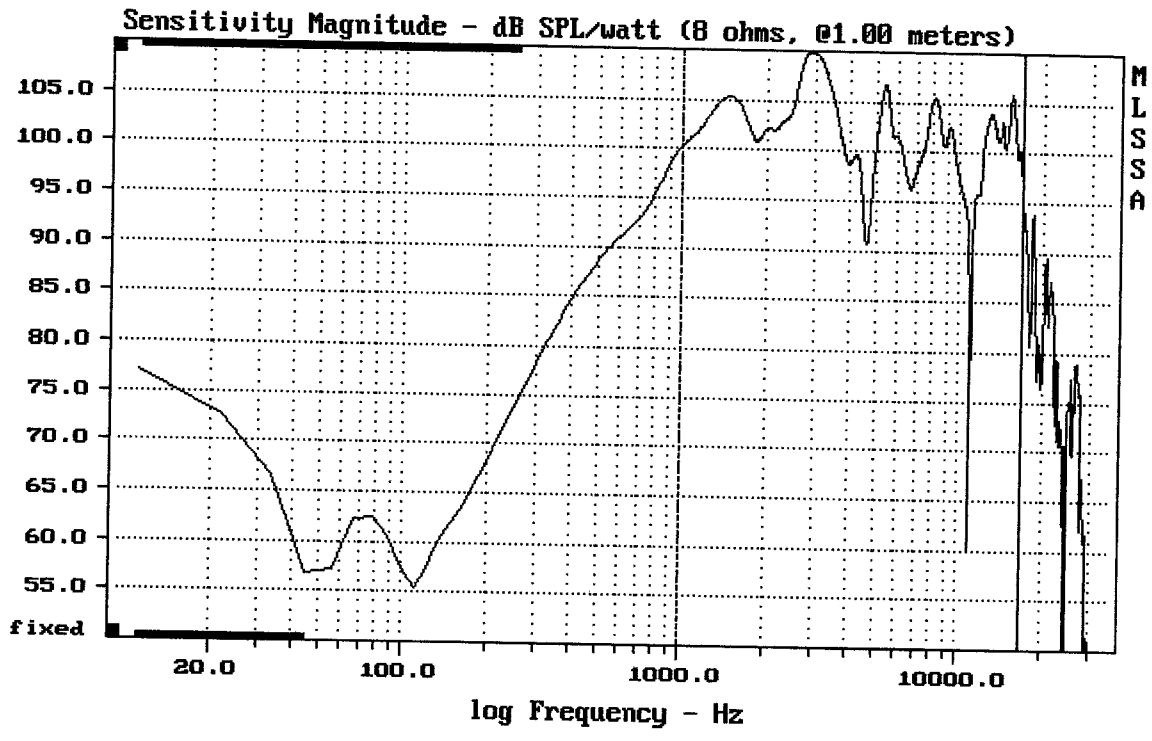


Level (999:16901 Hz) = 103.55 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE BETA 10CX + PSD2002S

MLSSA: Frequency Domain

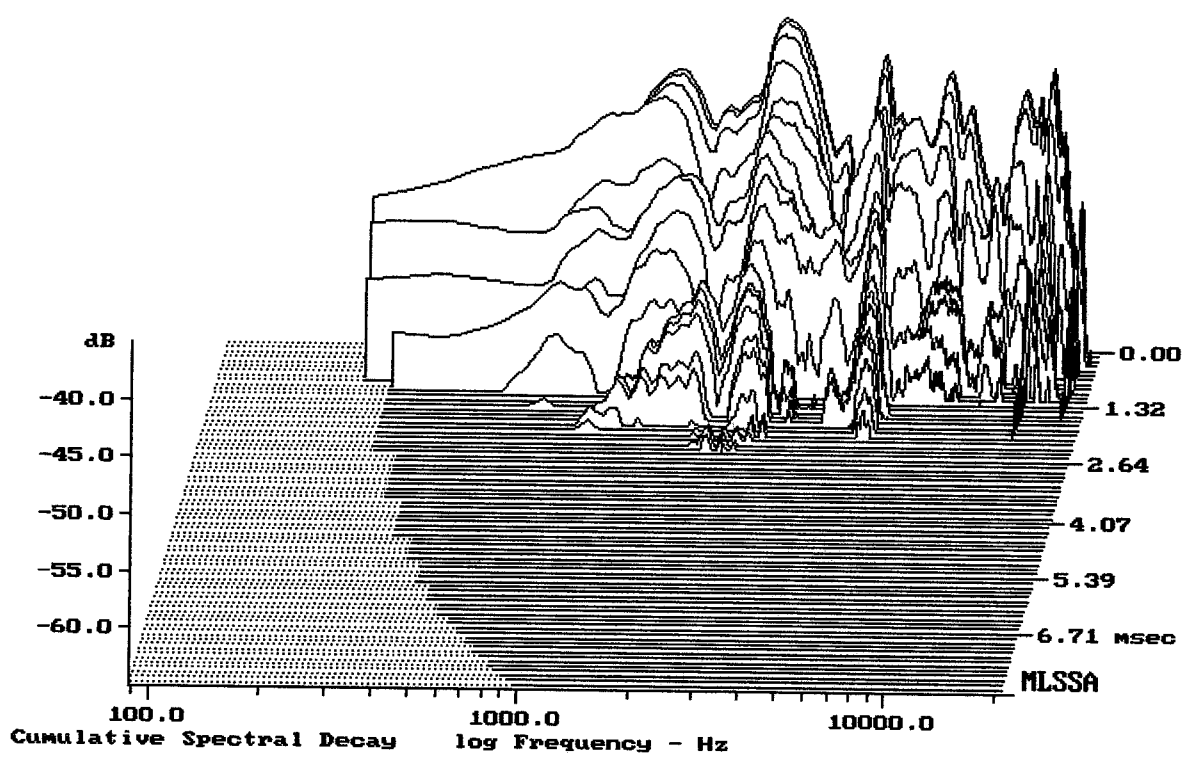


-64.15 dB, 2353 Hz (53), 2.420 msec (23)

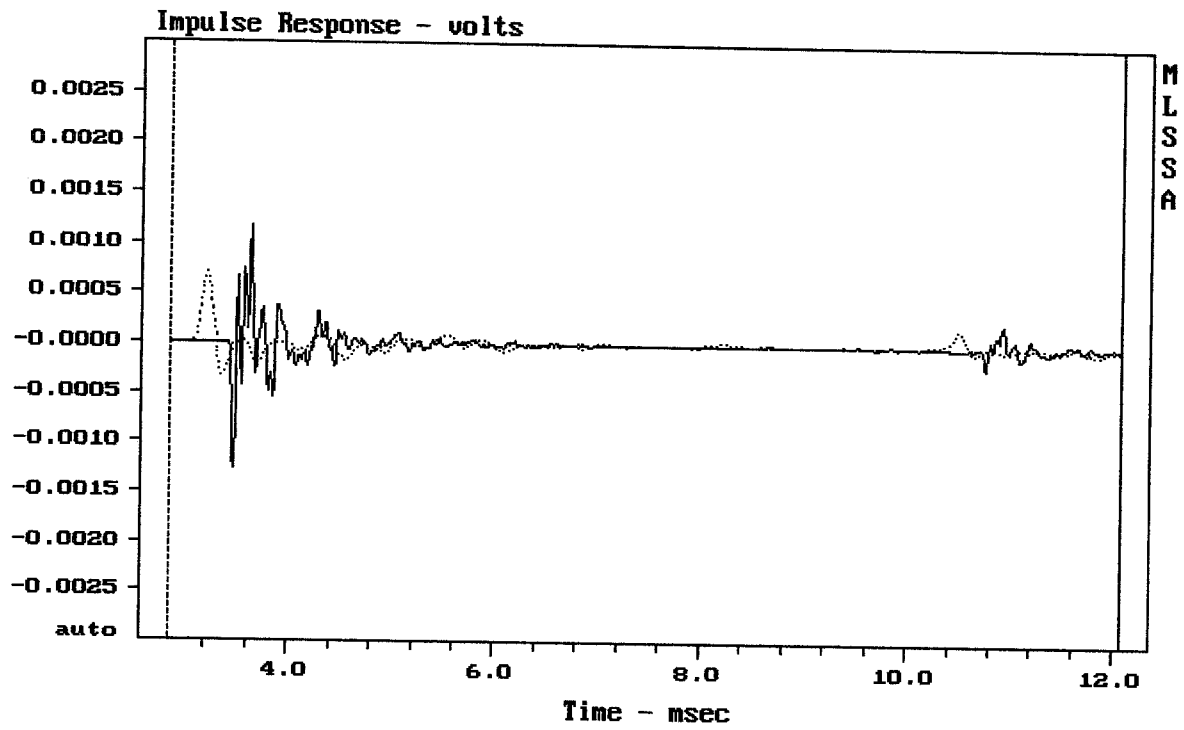

mean: 4.107e-008, rms: 8.551e-005, std: 8.551e-005, max: 0.0006996, min: -0.00

EMINENCE BETA 10CX + PSD2002S

MLSSA: Time Domain

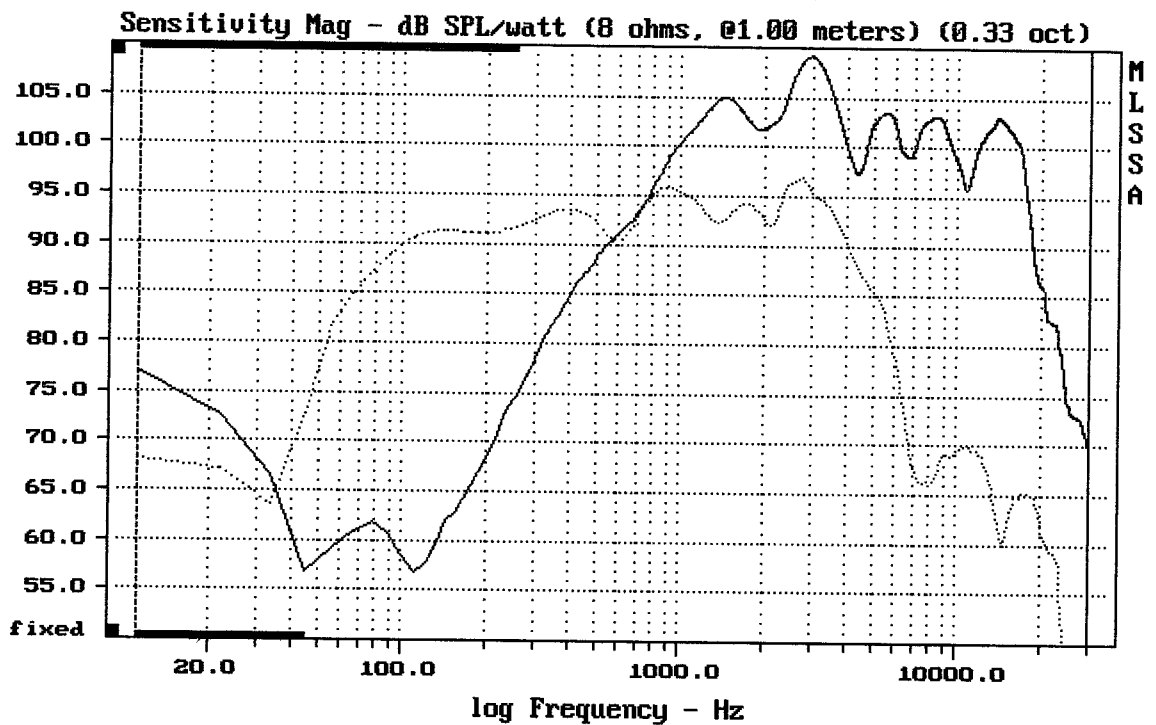

CURSOR: dy = -31.4962 x = 30007.1014 (2704)

EMINENCE BETA 10CX + PSD2002S

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.38	Ohms
2	Fs	46.52	Hz
3	Re	5.53	Ohms[dc]
4	Res	111.46	Ohms
5	Qms	8.70	
6	Qes	0.43	
7	Qts	0.41	
8	L1	0.64	mH
9	L2	1.17	mH
10	R2	6.27	Ohms
11	RMSE-load	0.44	Ohms
12	Vas(Sd)	70.22	liters
13	Mms	28.09	grams
14	Cms	417	$\mu\text{M}/\text{Newton}$
15	B1	10.25	Tesla-M
16	SPLref(Sd)	94.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -36.3% (-20% to -50% is recommended).

EMINENCE BETA 10CX

MLSSA: Parameters

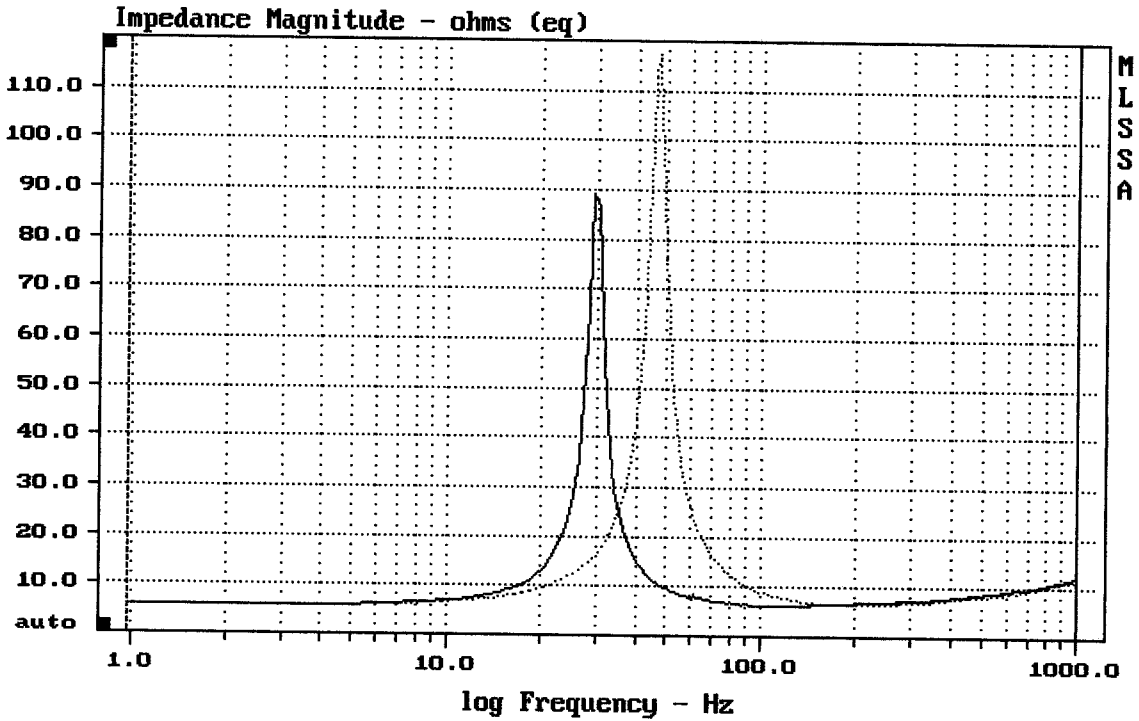

mean: 10.18, rms: 13.55, std: 8.953, max: 117.2, min: 5.651

MLSSA: Frequency Domain