


Level (100:4006 Hz) = 97.83 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE DELTA 10

MLSSA: Frequency Domain

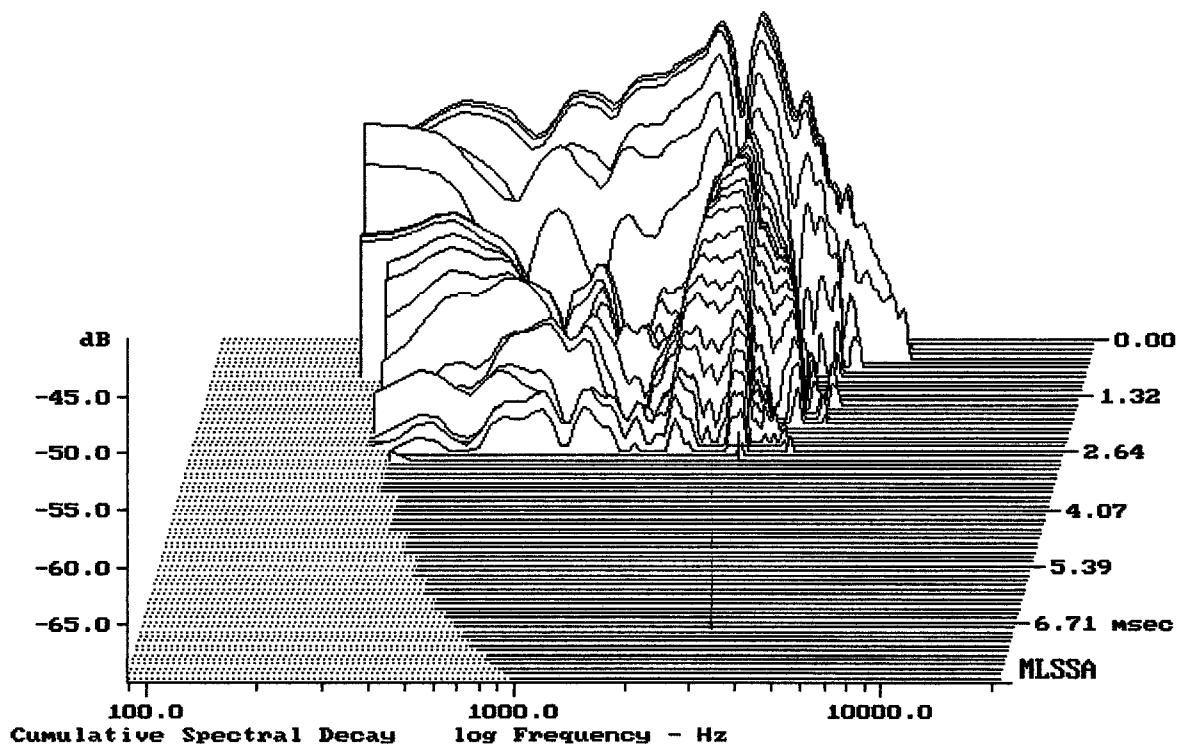

-69.20 dB, 2752 Hz (62), 2.750 msec (26)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.12	Ohms
2	Fs	57.58	Hz
3	Re	5.24	Ohms[dc]
4	Res	102.38	Ohms
5	Qms	6.76	
6	Qes	0.35	
7	Qts	0.33	
8	L1	0.59	mH
9	L2	0.93	mH
10	R2	4.46	Ohms
11	RMSE-load	0.47	Ohms
12	Vas(Sd)	43.13	liters
13	Mms	29.85	grams
14	Cms	256	$\mu\text{M}/\text{Newton}$
15	B1	12.79	Tesla-M
16	SPLref(Sd)	95.6	dB[Re]
17	Rub-index	0.15	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.1% (-20% to -50% is recommended).

EMINENCE DELTA 10

MLSSA: Parameters

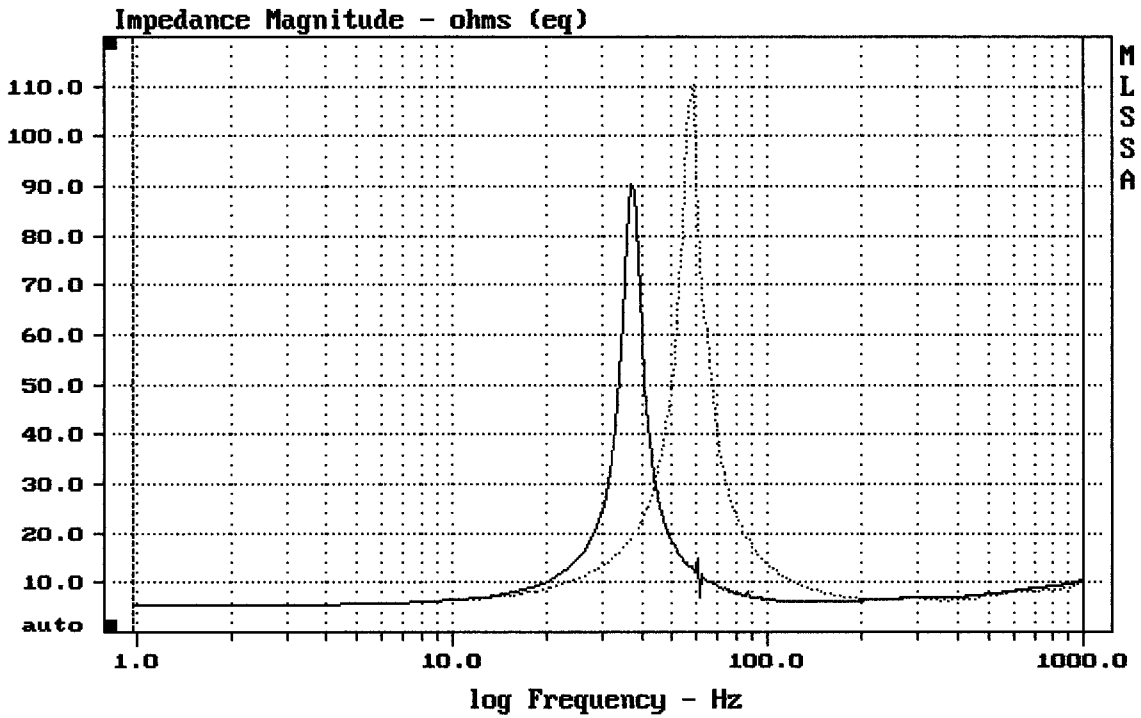

mean: 10.01, rms: 14.35, std: 10.28, max: 110.1, min: 5.296

MLSSA: Frequency Domain