


Level (100:4506 Hz) = 96.49 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE DELTALITE 2510 "OLD"

MLSSA: Frequency Domain

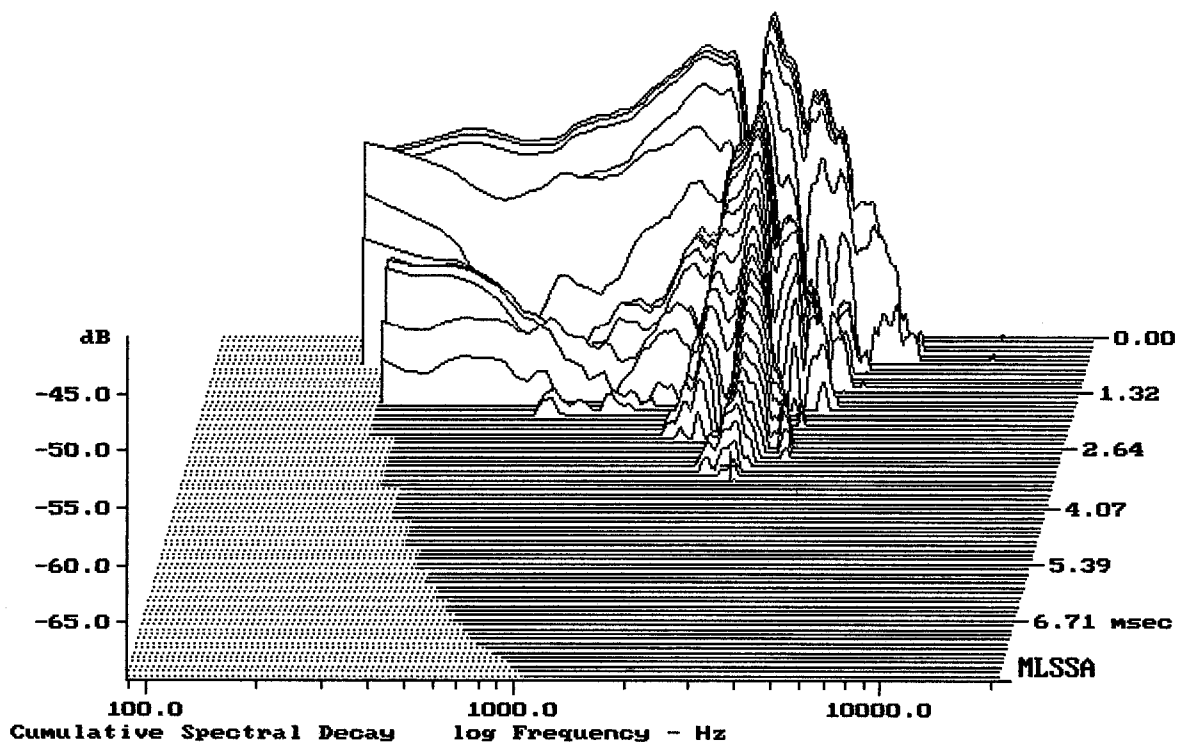

-69.07 dB, 2708 Hz (61), 3.300 msec (31)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.53	Ohms
2	Fs	54.07	Hz
3	Re	5.71	Ohms[dc]
4	Res	60.85	Ohms
5	Qms	3.94	
6	Qes	0.37	
7	Qts	0.34	
8	L1	0.63	mH
9	L2	0.93	mH
10	R2	3.26	Ohms
11	RMSE-load	0.39	Ohms
12	Vas(Sd)	62.23	liters
13	Mms	23.46	grams
14	Cms	369	$\mu\text{M}/\text{Newton}$
15	B1	11.10	Tesla-M
16	SPLref(Sd)	96.1	dB[Re]
17	Rub-index	0.13	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -39.3% (-20% to -50% is recommended).

EMINENCE DELTALITE 2510 "OLD"

MLSSA: Parameters

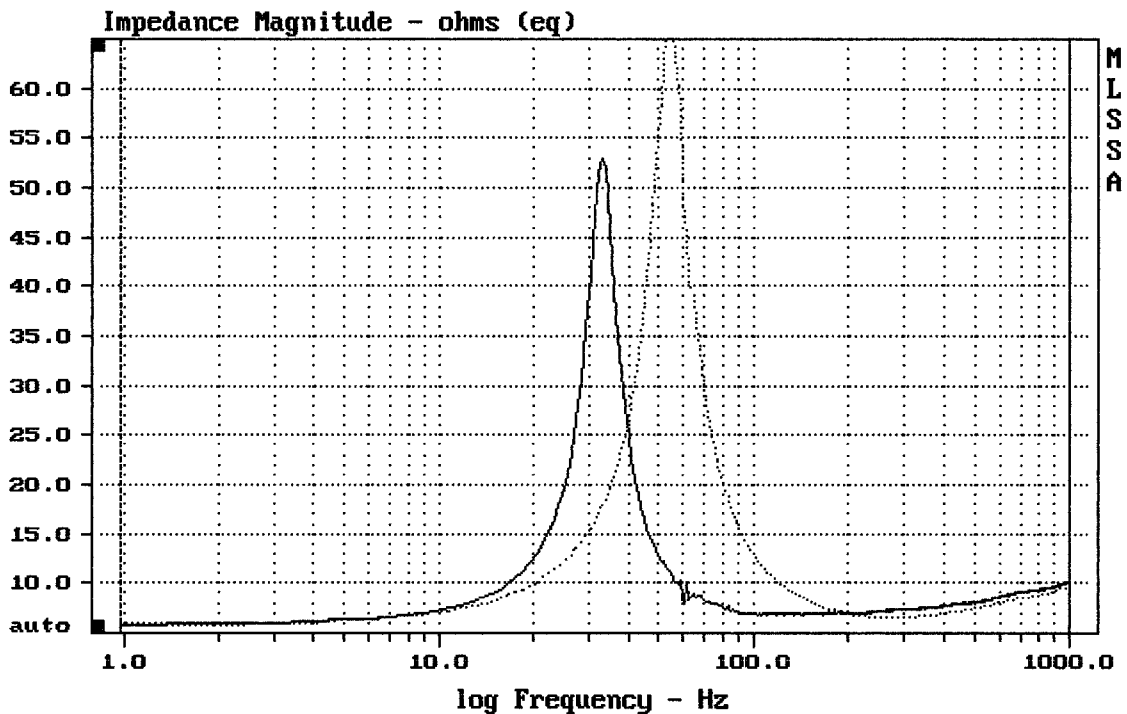

mean: 9.642, rms: 12.09, std: 7.295, max: 67.71, min: 5.842

MLSSA: Frequency Domain