



Level (55:2708 Hz) = 95.98 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE OMEGA PRO 18

MLSSA: Frequency Domain

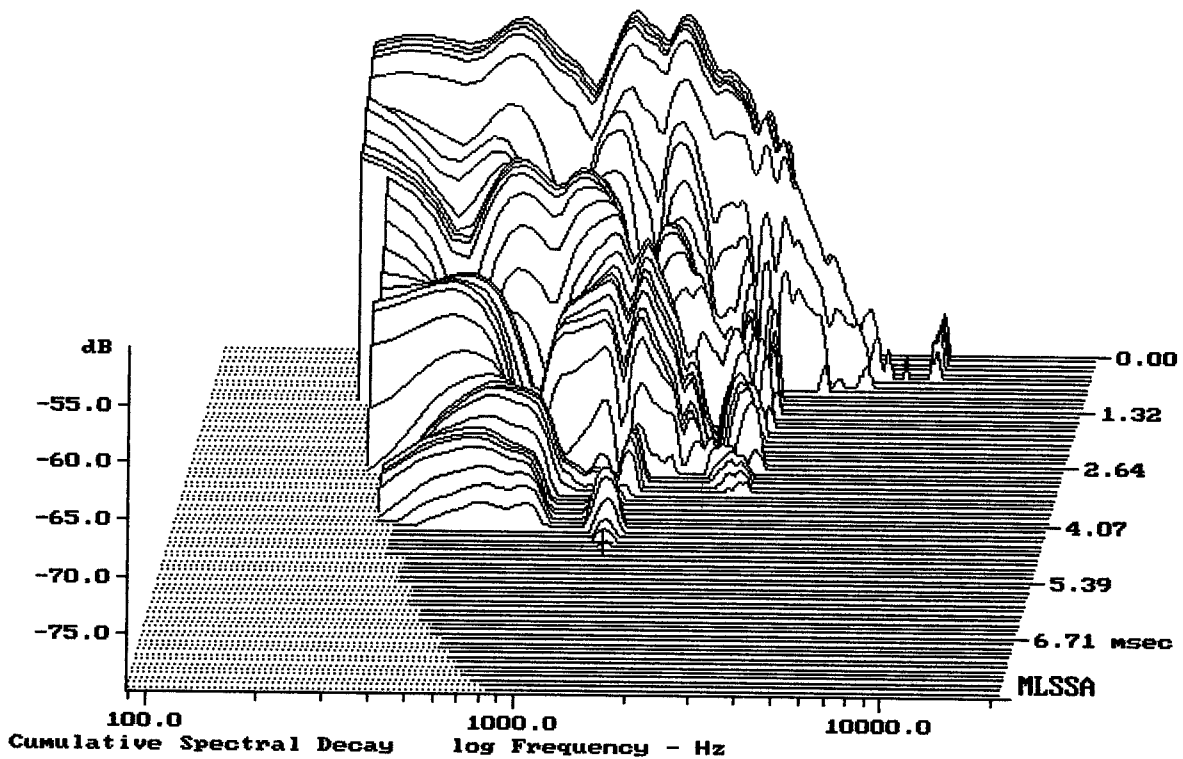


-79.64 dB, 1332 Hz (30), 4.620 msec (43)

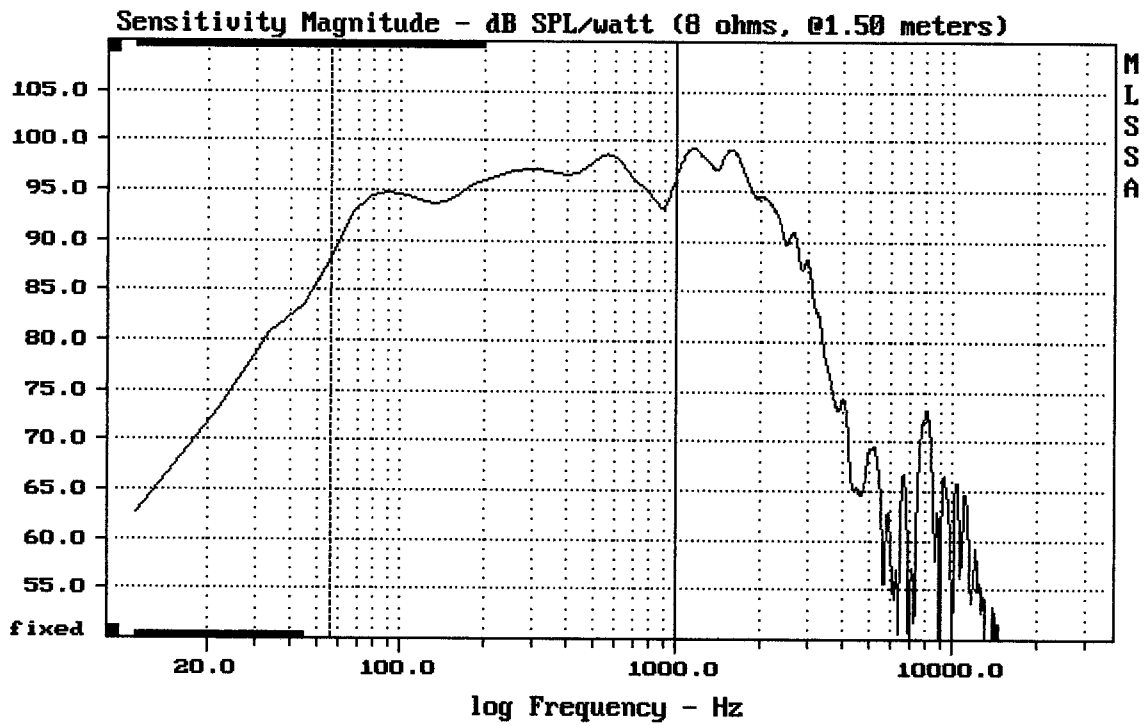

Level (55:999 Hz) = 95.66 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE OMEGA PRO 18

MLSSA: Frequency Domain

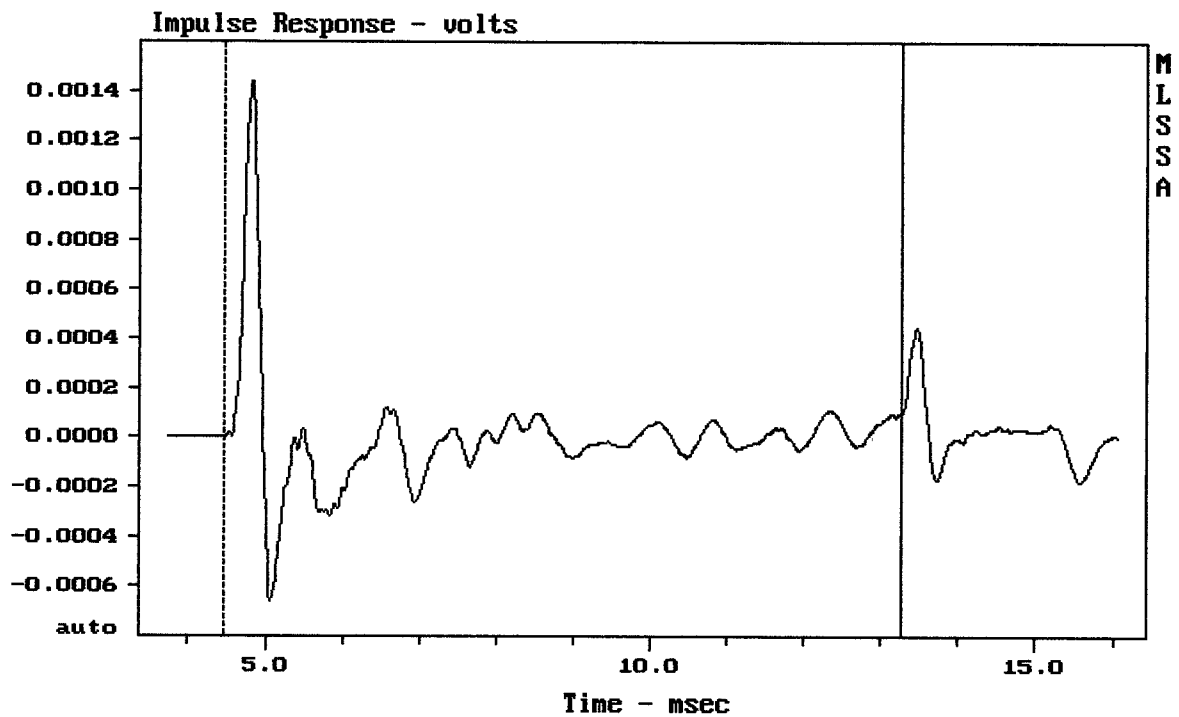

mean: -1.71e-006, rms: 0.0002223, std: 0.0002223, max: 0.001434, min: -0.000661

EMINENCE OMEGA PRO 18

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.89	Ohms
2	Fs	24.22	Hz
3	Re	5.25	Ohms[dc]
4	Res	122.29	Ohms
5	Qms	7.73	
6	Qes	0.33	
7	Qts	0.32	
8	L1	1.12	mH
9	L2	1.74	mH
10	R2	10.68	Ohms
11	RMSE-load	0.75	Ohms
12	Vas(Sd)	581.49	liters
13	Mms	141.31	grams
14	Cms	305	$\mu\text{M}/\text{Newton}$
15	B1	18.44	Tesla-M
16	SPLref(Sd)	95.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1164.16 sq cm


DCR mode: Measure (-0.15 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.2% (-20% to -50% is recommended).

EMINENCE OMEGA PRO 18

MLSSA: Parameters

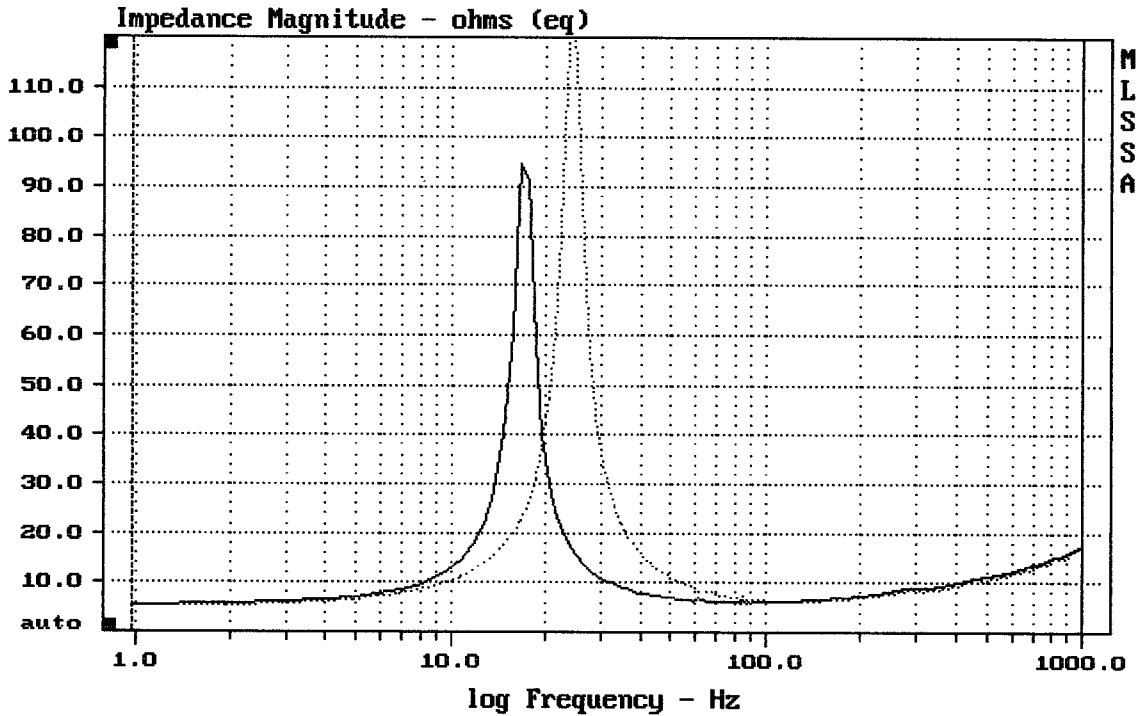

mean: 11.89, rms: 14.26, std: 7.866, max: 127.2, min: 5.483

MLSSA: Frequency Domain