

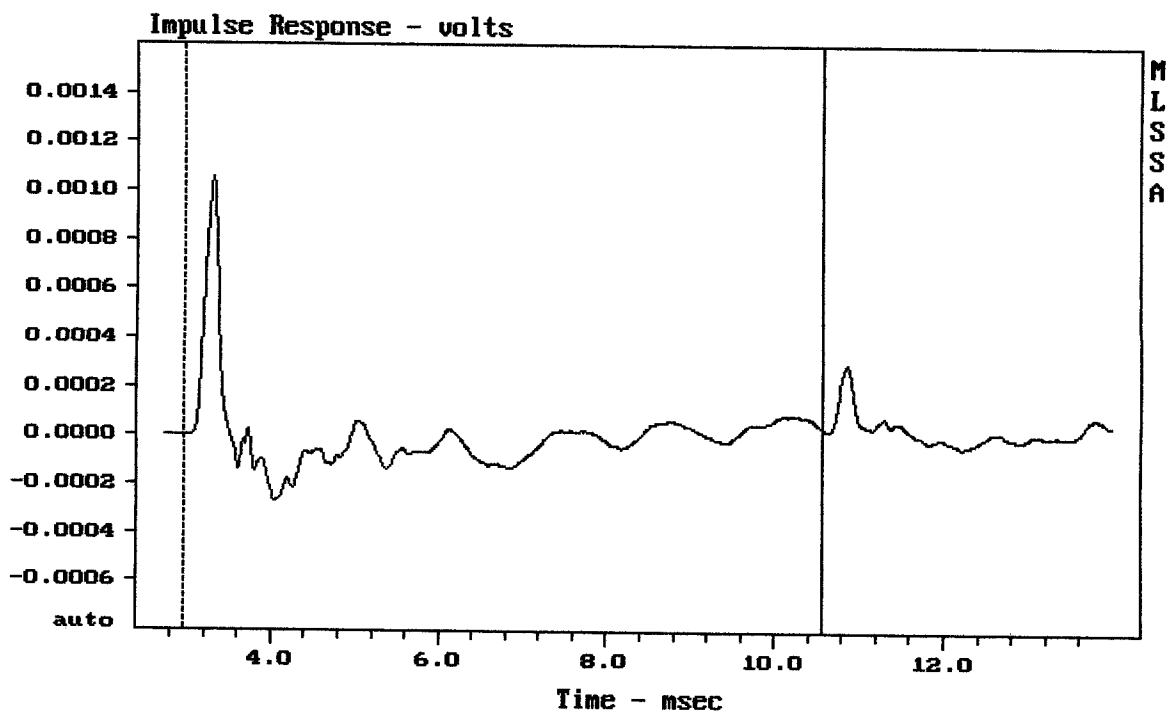

---

Level (55:799 Hz) = 84.34 dB SPL/watt (4 ohms, @1.00 meters)

---

SELENIUM 12SW5

MLSSA: Frequency Domain




---

CURSOR: y = 3.62758e-005 x = 10.5600 (960)

---

SELENIUM 12SW5

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.53	Ohms
2	Fs	32.93	Hz
3	Re	3.51	Ohms[dc]
4	Res	44.66	Ohms
5	Qms	6.03	
6	Qes	0.47	
7	Qts	0.44	
8	L1	1.00	mH
9	L2	1.57	mH
10	R2	6.31	Ohms
11	RMSE-load	0.66	Ohms
12	Vas(Sd)	64.76	liters
13	Mms	137.00	grams
14	Cms	171	$\mu\text{M}/\text{Newton}$
15	B1	14.49	Tesla-M
16	SPLref(Sd)	88.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 520.00 sq cm

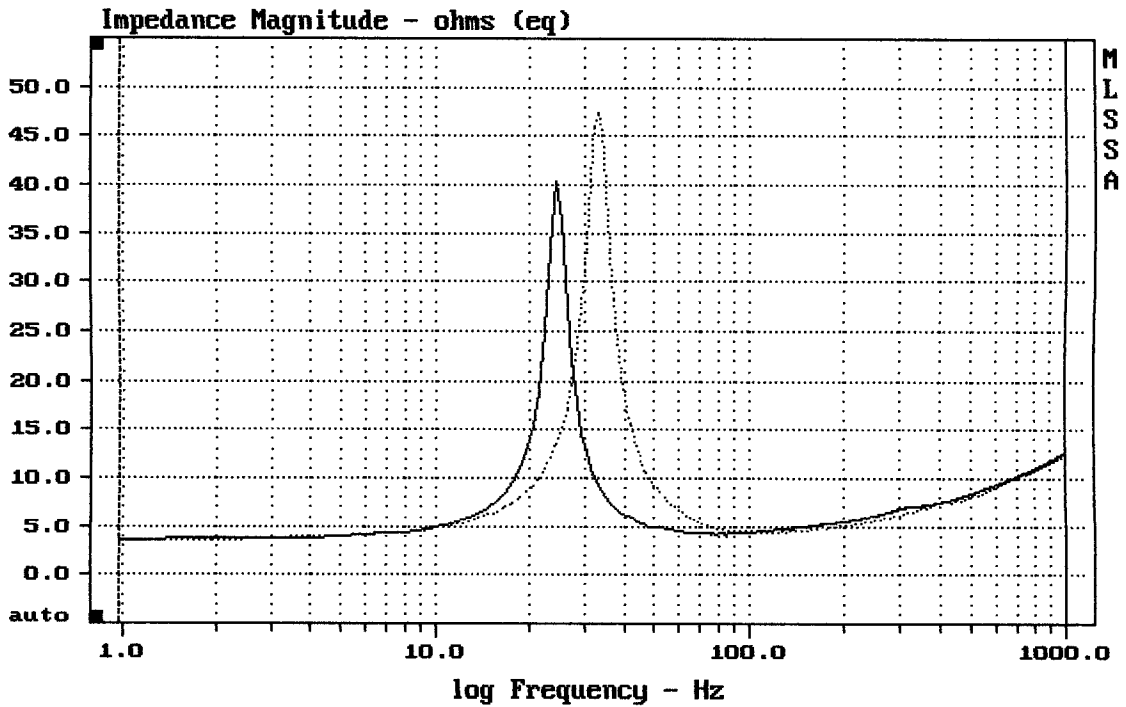
DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.0% (-20% to -50% is recommended).

SELENIUM 12SW5

MLSSA: Parameters



mean: 8.684, rms: 9.513, std: 3.885, max: 47.33, min: 3.589

MLSSA: Frequency Domain