


Level (100:4206 Hz) = 97.38 dB SPL/watt (8 ohms, 01.00 meters)

10NDL64 2010

MLSSA: Frequency Domain

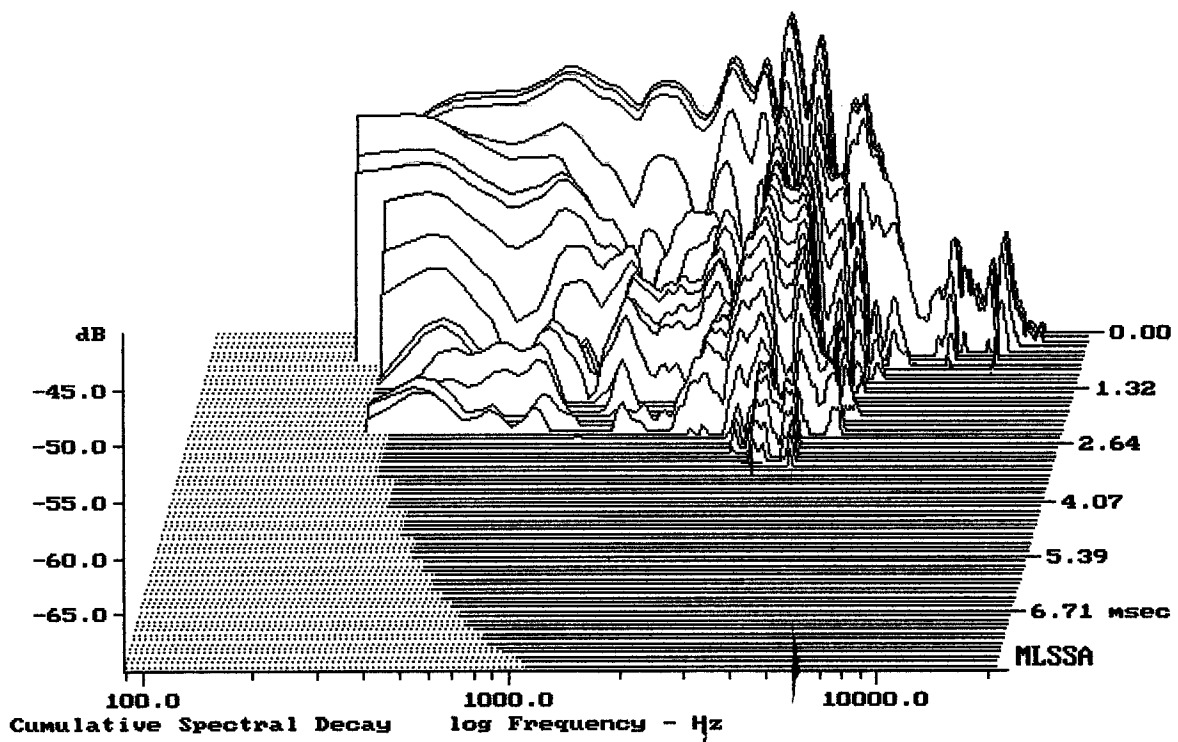

-69.64 dB, 3196 Hz (72), 3.190 msec (30)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.97	Ohms
2	Fs	68.40	Hz
3	Re	5.44	Ohms[dc]
4	Res	41.83	Ohms
5	Qms	2.68	
6	Qes	0.35	
7	Qts	0.31	
8	L1	0.09	mH
9	L2	0.83	mH
10	R2	12.25	Ohms
11	RMSE-load	0.65	Ohms
12	Vas(Sd)	28.11	liters
13	Mms	32.45	grams
14	Cms	167	$\mu\text{M}/\text{Newton}$
15	Bl	14.75	Tesla-M
16	SPLref(Sd)	95.9	dB[Re]
17	Rub-index	0.08	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.5% (-20% to -50% is recommended).

10NDL64 2010

MLSSA: Parameters

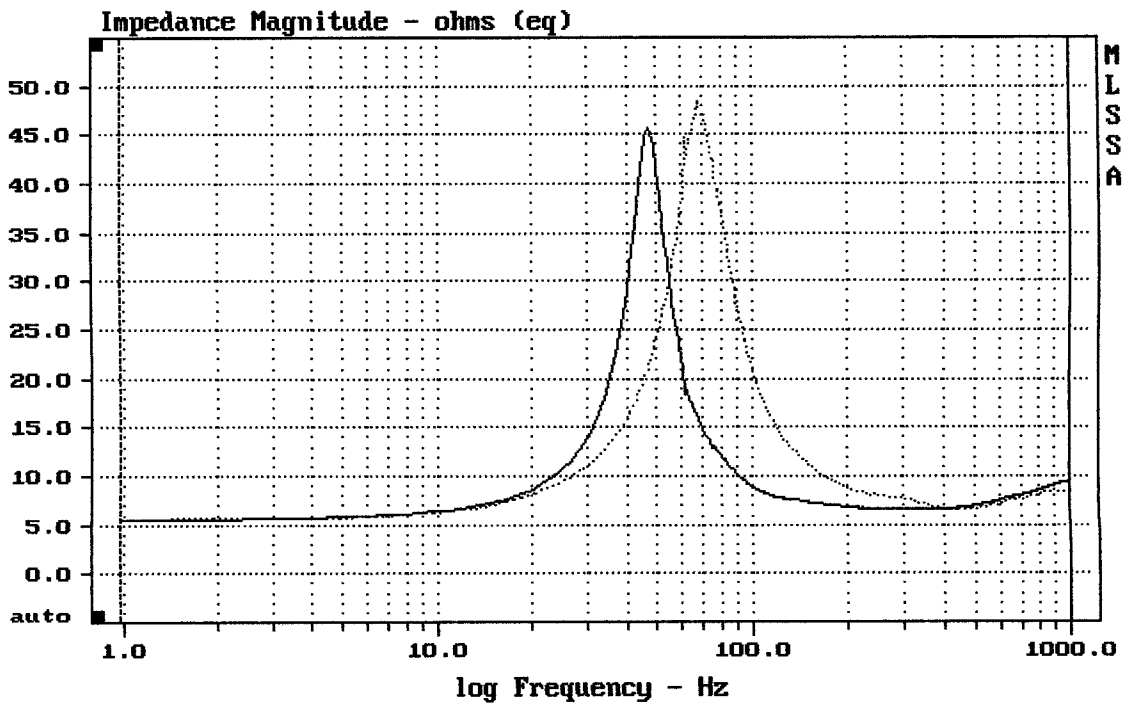

mean: 9.663, rms: 11.62, std: 6.461, max: 48.31, min: 5.561

MLSSA: Frequency Domain