


Level (100:4206 Hz) = 96.22 dB SPL/watt (8 ohms, @1.00 meters)

10NW64 2010

MLSSA: Frequency Domain

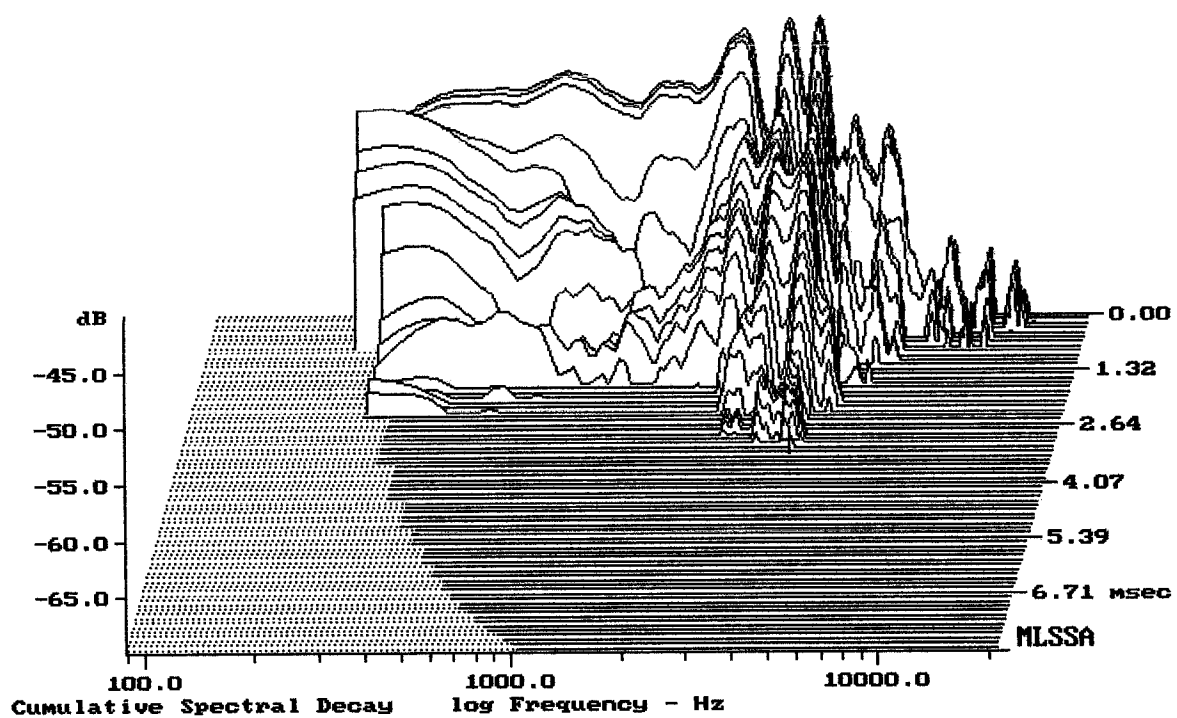

-69.42 dB, 4039 Hz (91), 3.190 msec (30)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.81	Ohms
2	Fs	64.04	Hz
3	Re	5.13	Ohms[dc]
4	Res	53.71	Ohms
5	Qms	3.86	
6	Qes	0.37	
7	Qts	0.34	
8	L1	-0.73	mH
9	L2	1.52	mH
10	R2	29.48	Ohms
11	RMSE-load	0.94	Ohms
12	Vas(Sd)	23.38	liters
13	Mms	44.52	grams
14	Cms	139	$\mu$ M/Newton
15	B1	15.79	Tesla-M
16	SPLref(Sd)	94.0	dB[Re]
17	Rub-index	0.08	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.1% (-20% to -50% is recommended).

10NW64 2010

MLSSA: Parameters

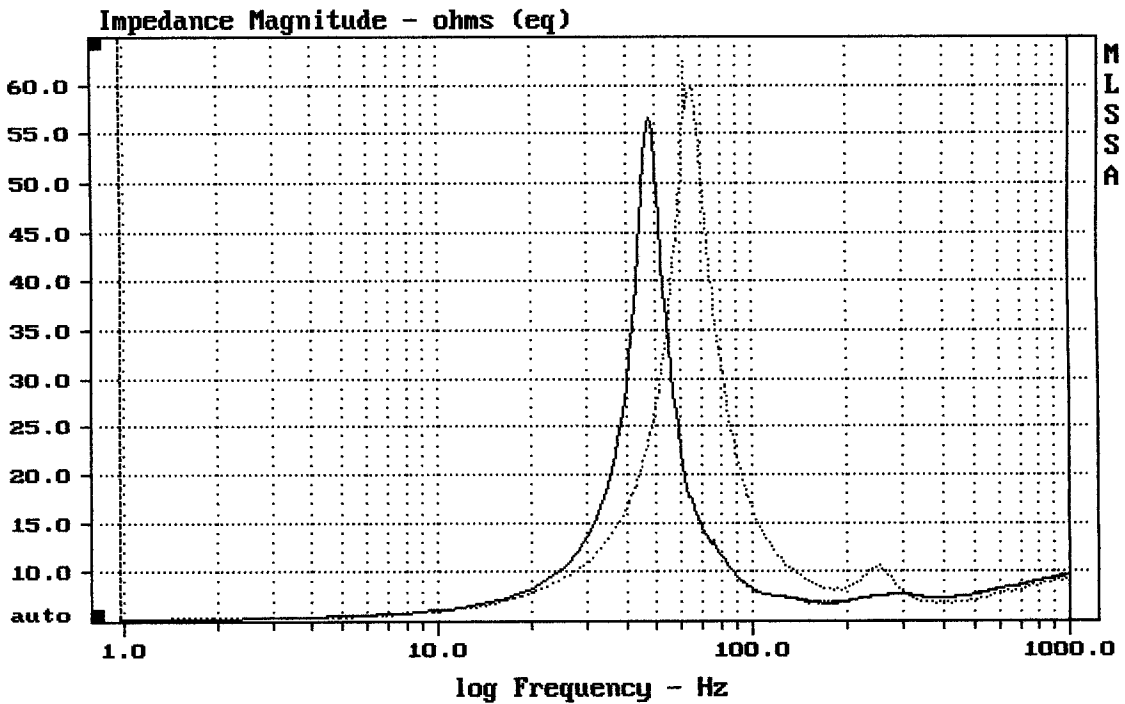

mean: 9.91, rms: 12.11, std: 6.952, max: 62.5, min: 5.238

MLSSA: Frequency Domain