


mean: 89.75, rms: 89.96, std: 1.74, max: 91.98, min: 86.07


L'ACOUSTICS SB15P

MLSSA: Frequency Domain

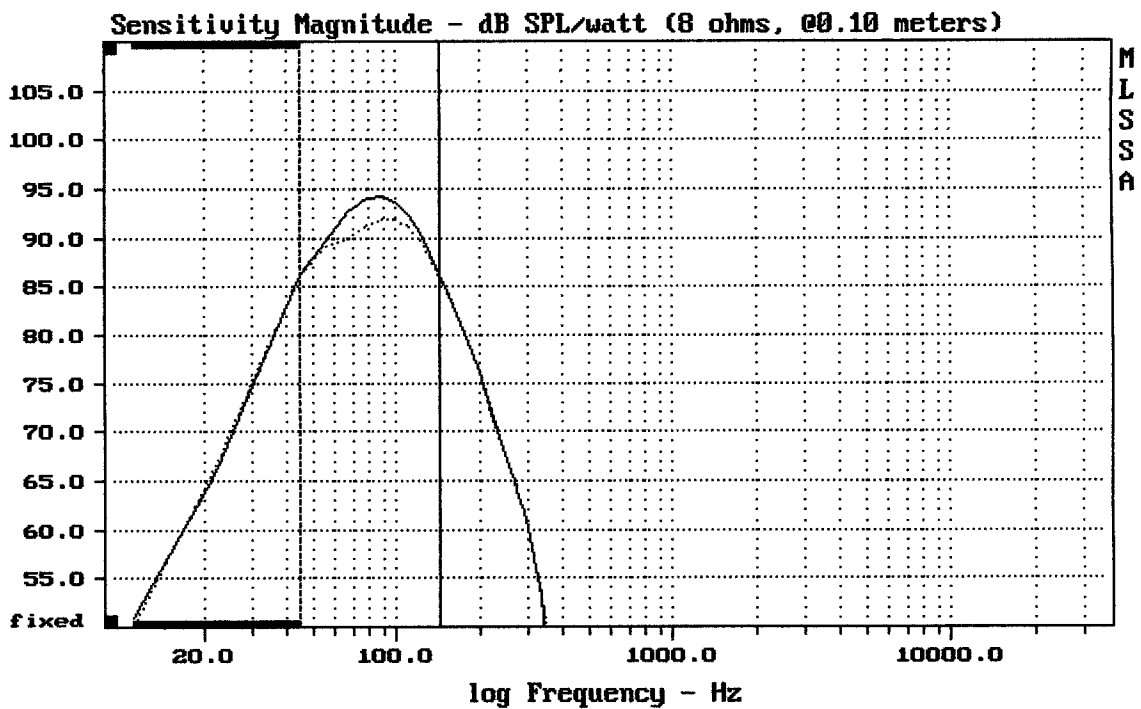

Overlay Compare: dev= +1.5/-1.4, std= 1, avg= 1.3


L'ACOUSTICS SB15P

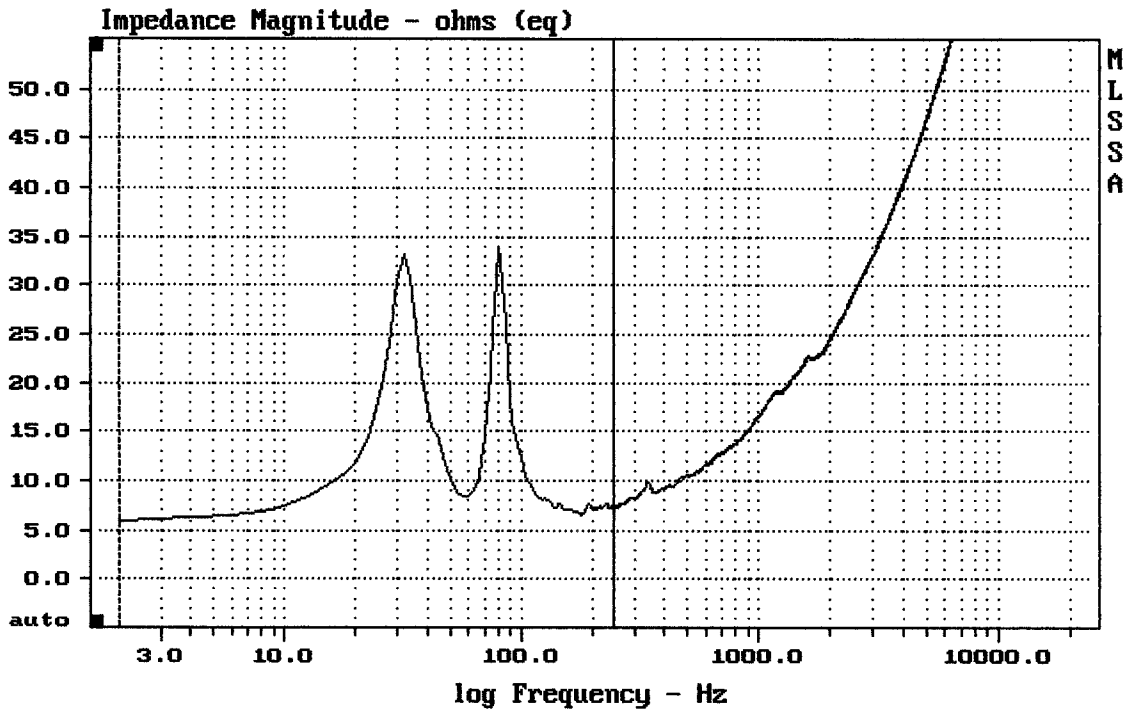

mean: 11.12, rms: 13.01, std: 6.765, max: 33.69, min: 5.844

L'ACOUSTICS SB15P

MLSSA: Frequency Domain

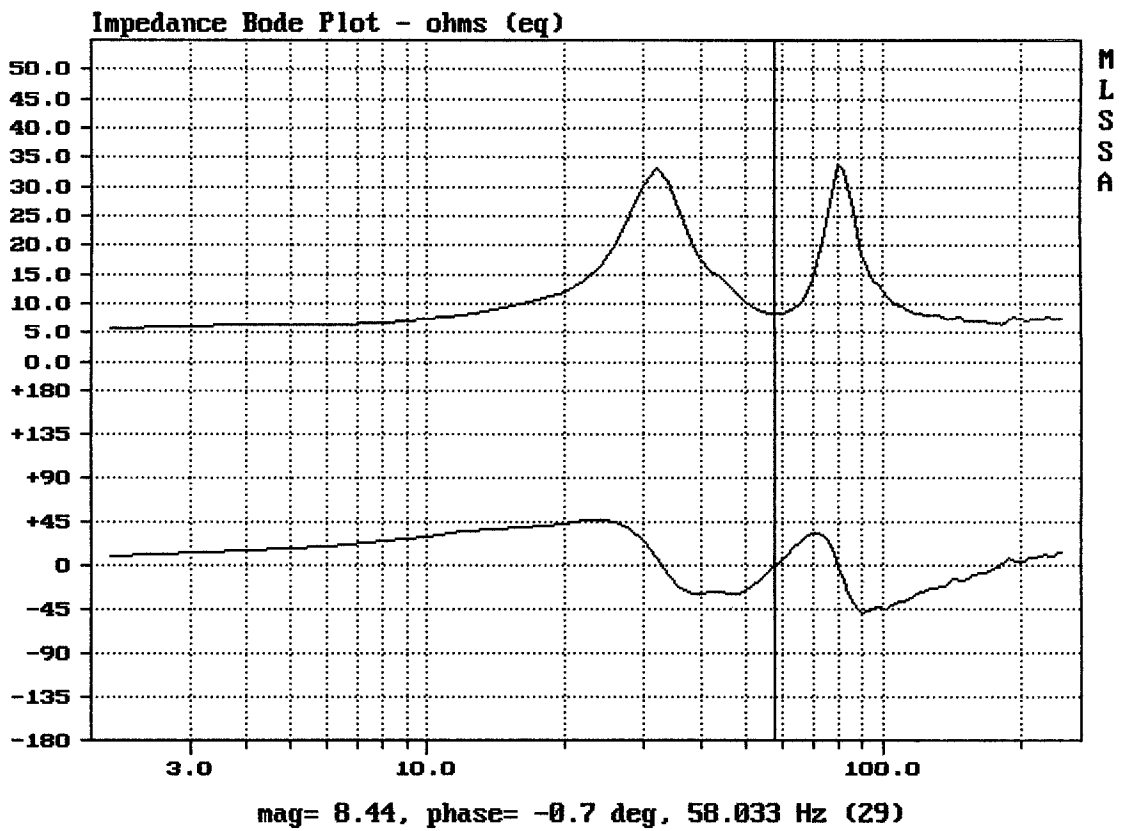

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.64	Ohms
2	Fs	45.87	Hz
3	Re	5.16	Ohms[dc]
4	Res	70.13	Ohms
5	Qms	5.15	
6	Qes	0.38	
7	Qts	0.35	
8	L1	1.56	mH
9	L2	1.69	mH
10	R2	6.25	Ohms
11	RMSE-load	0.67	Ohms
12	Vas(Sd)	101.81	liters
13	Mms	128.99	grams
14	Cms	93	$\mu\text{M}/\text{Newton}$
15	B1	22.49	Tesla-M
16	SPLref(Sd)	96.0	dB[Re]
17	Rub-index	0.11	

Method: Mass-loaded (120.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.20 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.0% (-20% to -50% is recommended).

15" B&C FROM L'ACOUSTICS SB15P

MLSSA: Parameters

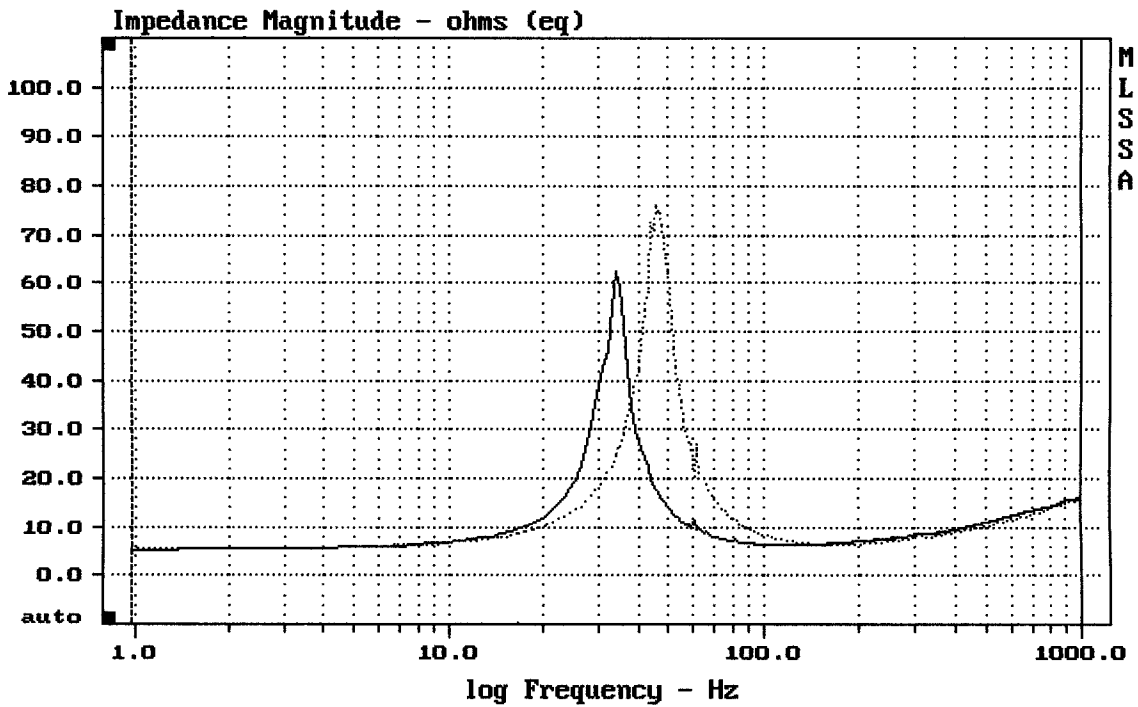

mean: 11.91, rms: 13.82, std: 7.008, max: 76.25, min: 5.418

MLSSA: Frequency Domain