



Level (100:22006 Hz) = 99.88 dB SPL/watt (16 ohms, @1.75 meters)

RCF P3115

MLSSA: Frequency Domain

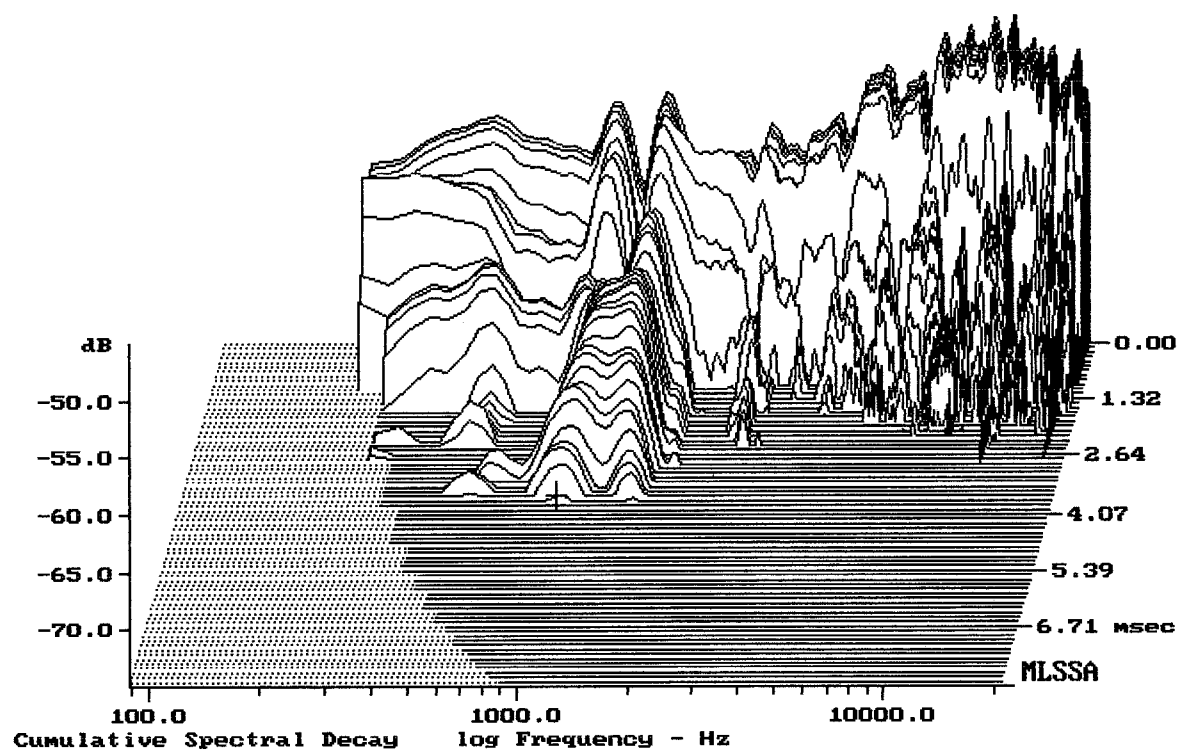


-74.45 dB, 932 Hz (21), 3.740 msec (35)

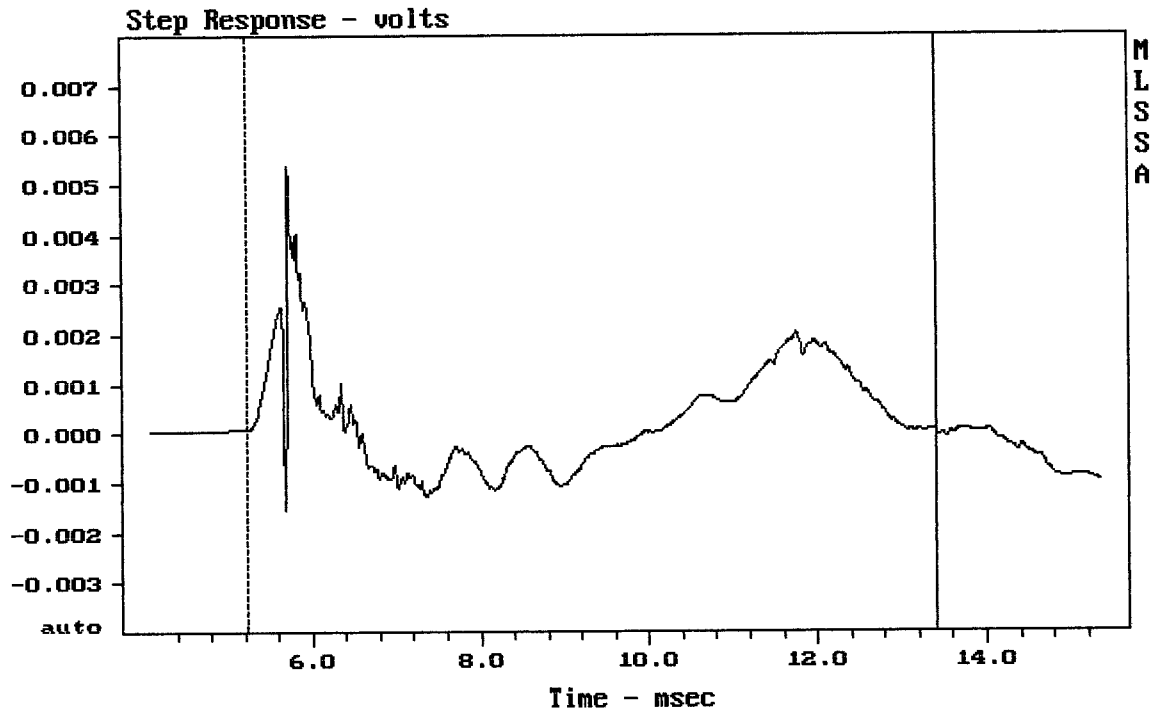

mean: 0.0002927, rms: 0.001101, std: 0.001062, max: 0.005373, min: -0.001529


RCF P3115

MLSSA: Time Domain

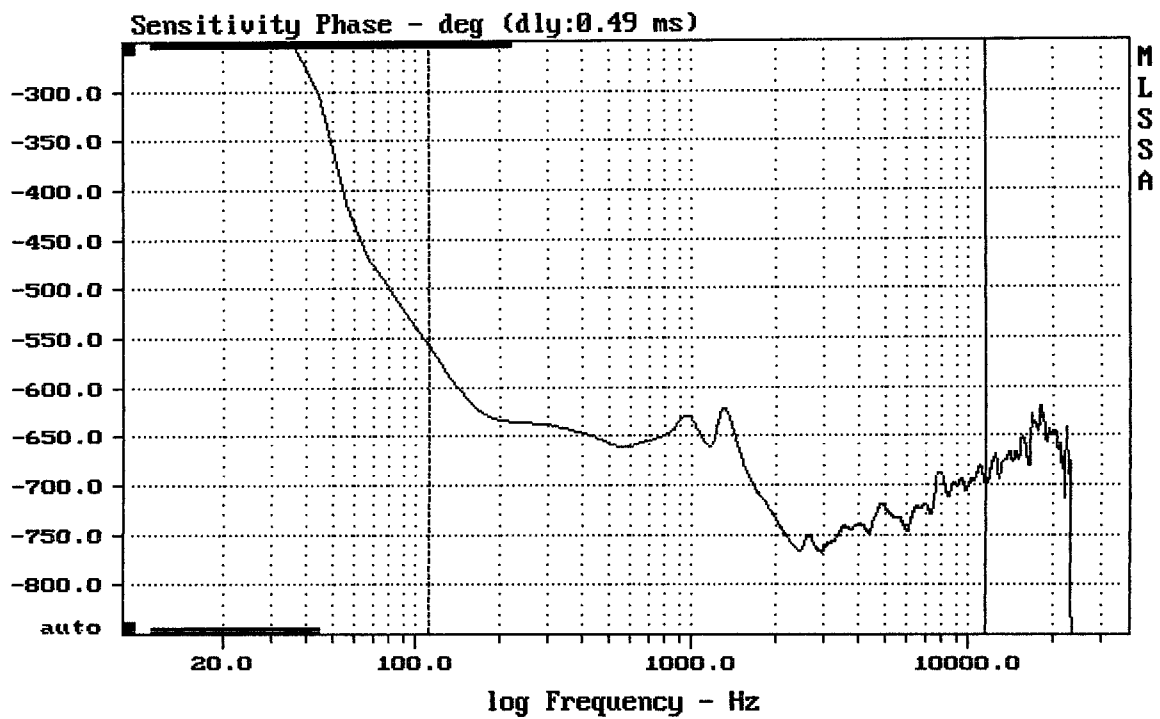

mean: -710.7, rms: 711.6, std: 34.31, max: -557.9, min: -767.3


RCF P3115

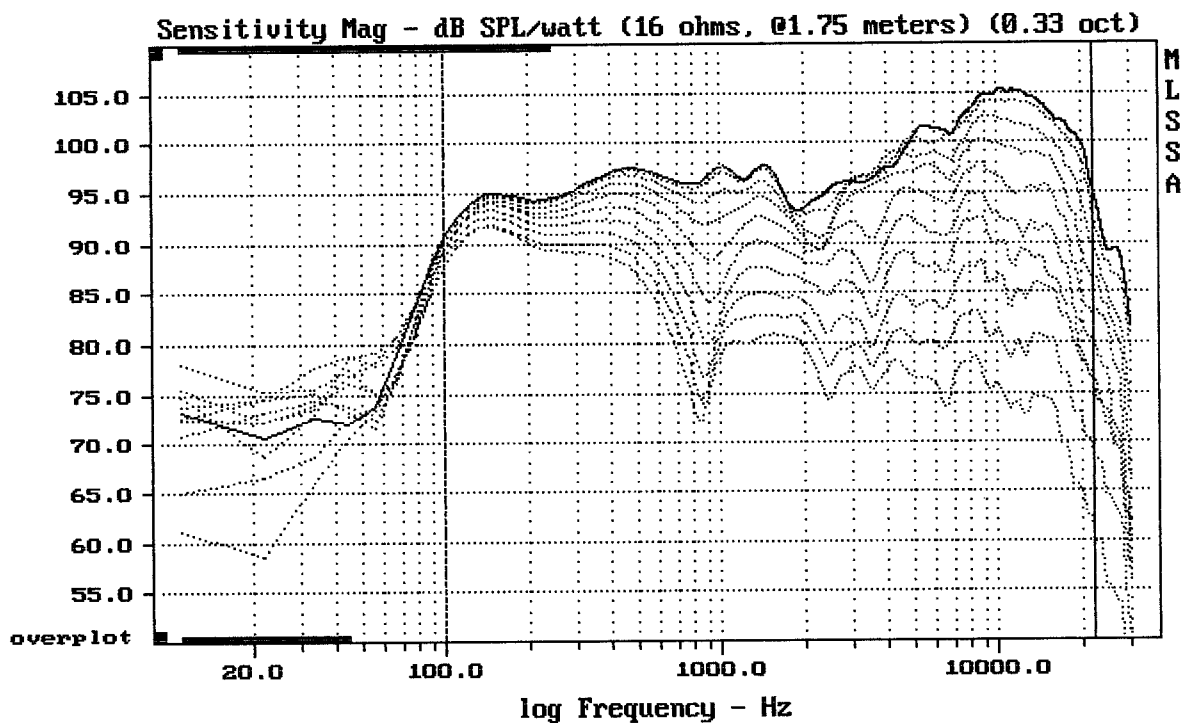

Overlay Compare: dev= +25/-8.4, std= 6.4, avg= -27


RCF P3115

MLSSA: Frequency Domain

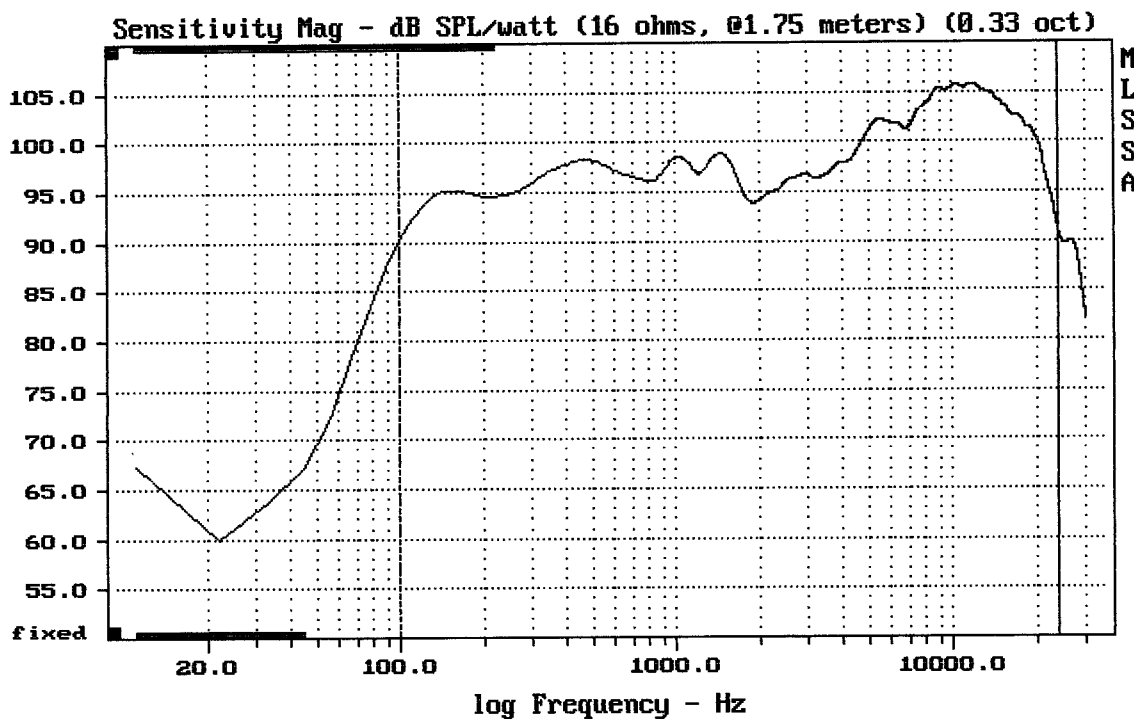

Level (100:24003 Hz) = 99.76 dB SPL/watt (16 ohms, @1.75 meters) (0.33 oct)


RCF P3115

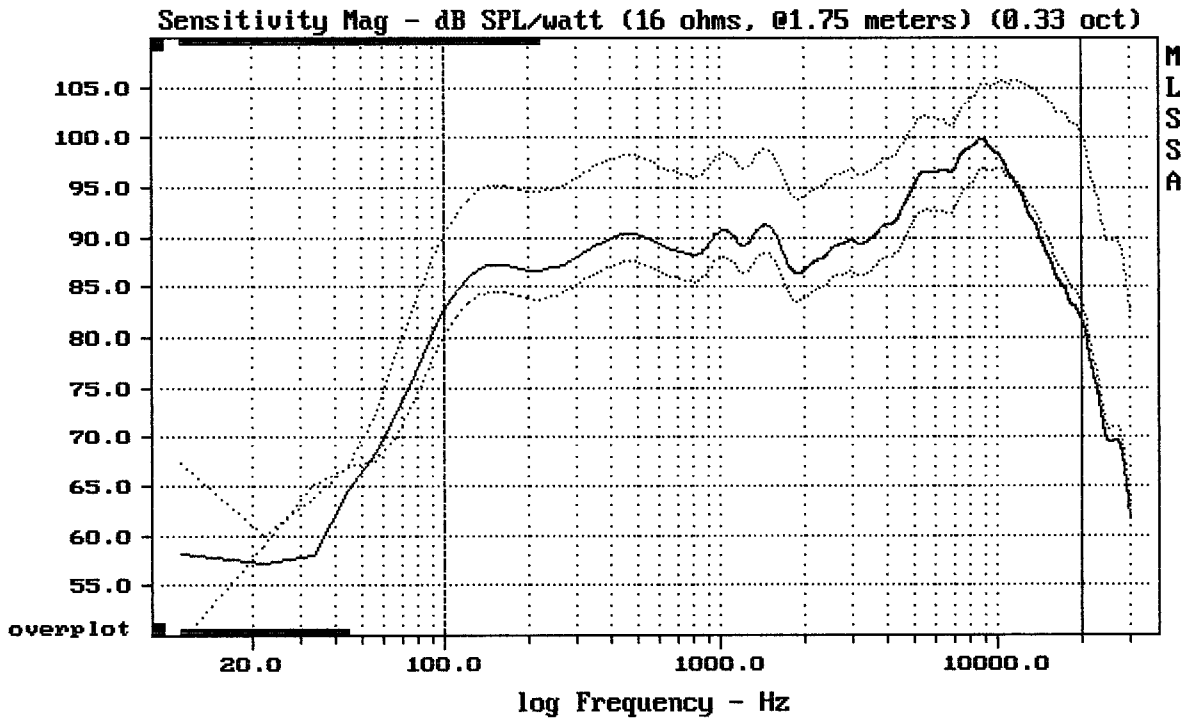

Overlay Compare: dev= +3.1/-5.6, std= 2.8, avg= -11


RCF P3115

MLSSA: Frequency Domain

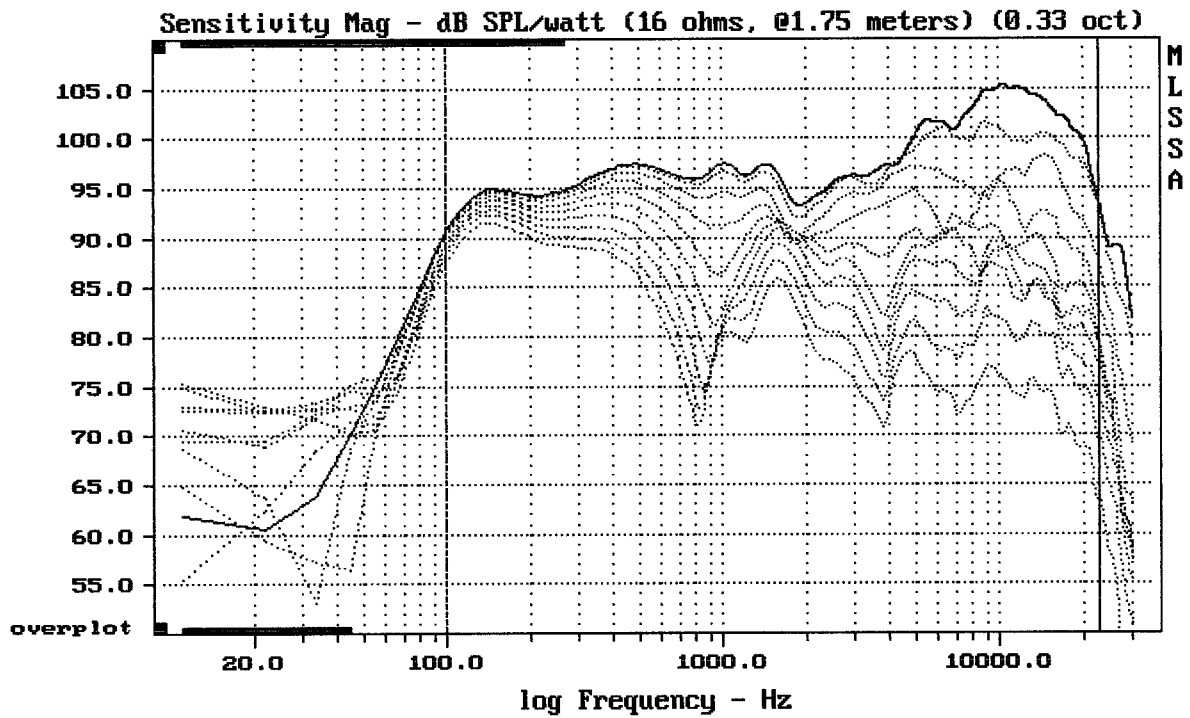

Overlay Compare: dev= +24/-5.3, std= 5.6, avg= -27


RCF P3115

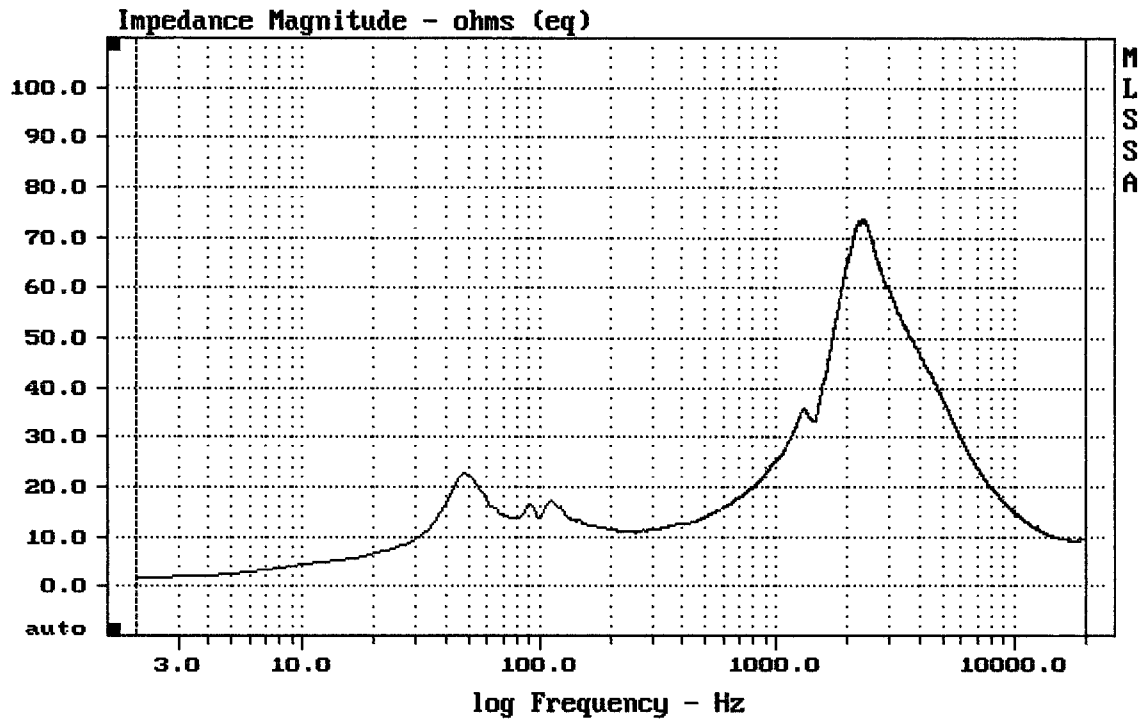

mean: 22.11, rms: 27.73, std: 16.73, max: 73.82, min: 1.579


RCF P3115

MLSSA: Frequency Domain

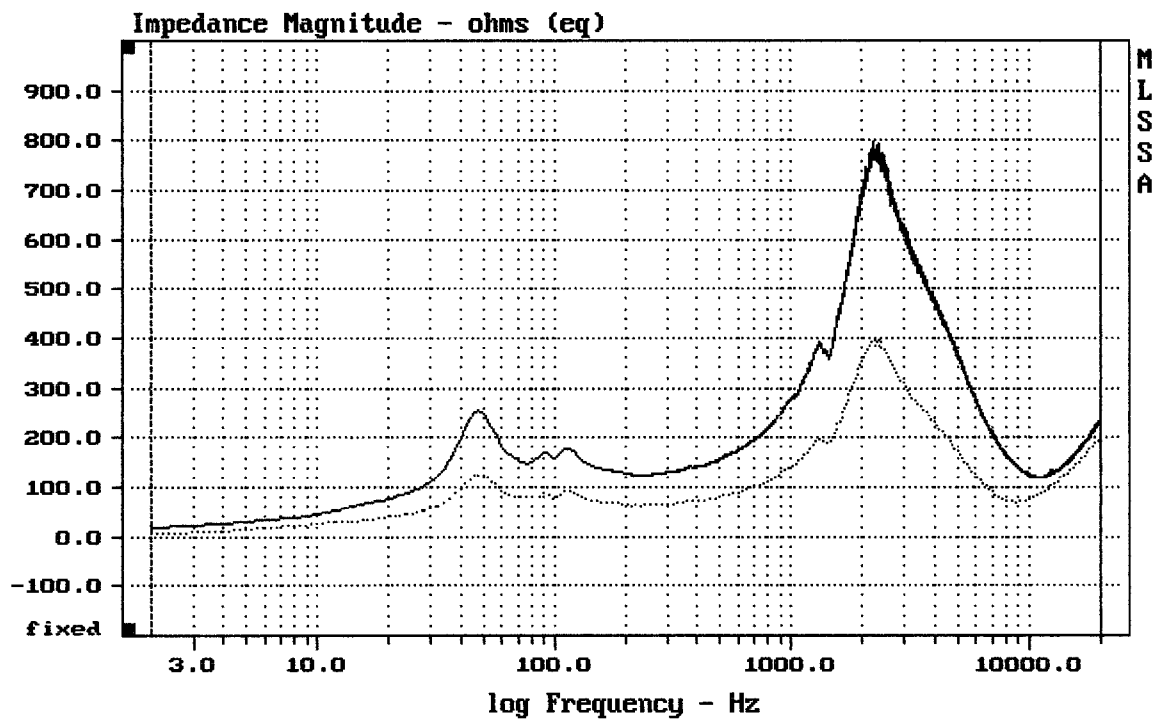

mean: 149.3, rms: 166.7, std: 74.31, max: 397.5, min: 7.89


RCF P3115

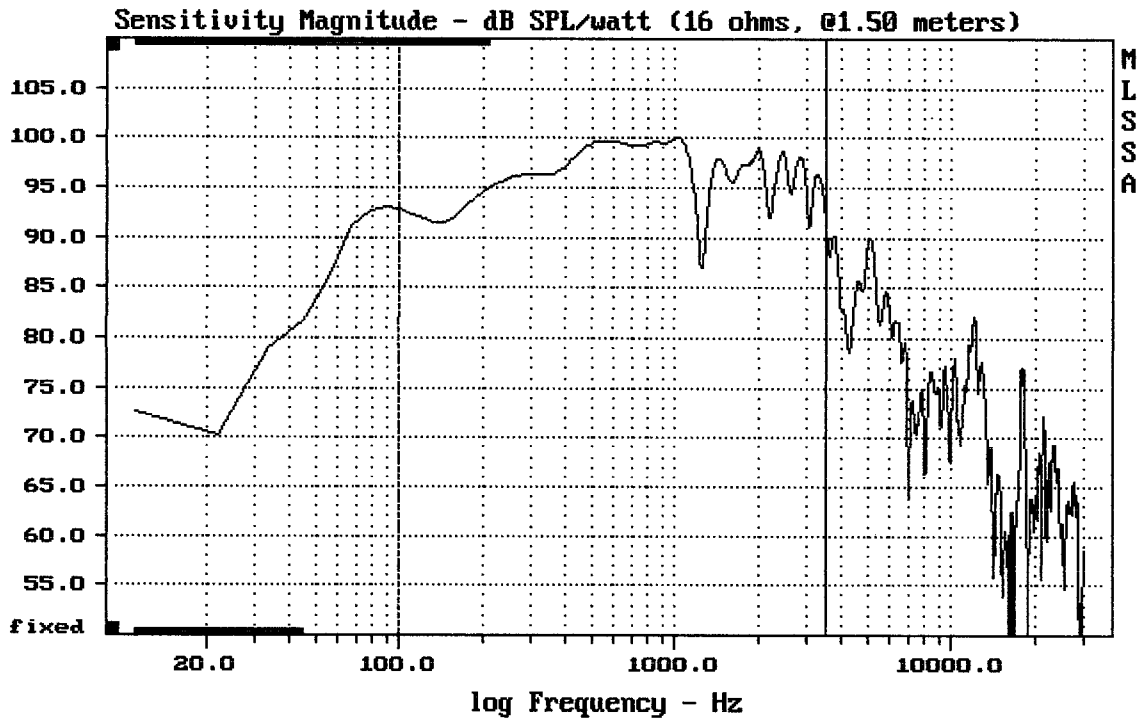

Level (100:3507 Hz) = 96.95 dB SPL/watt (16 ohms, @1.50 meters)

15" FROM RCF P3115

MLSSA: Frequency Domain

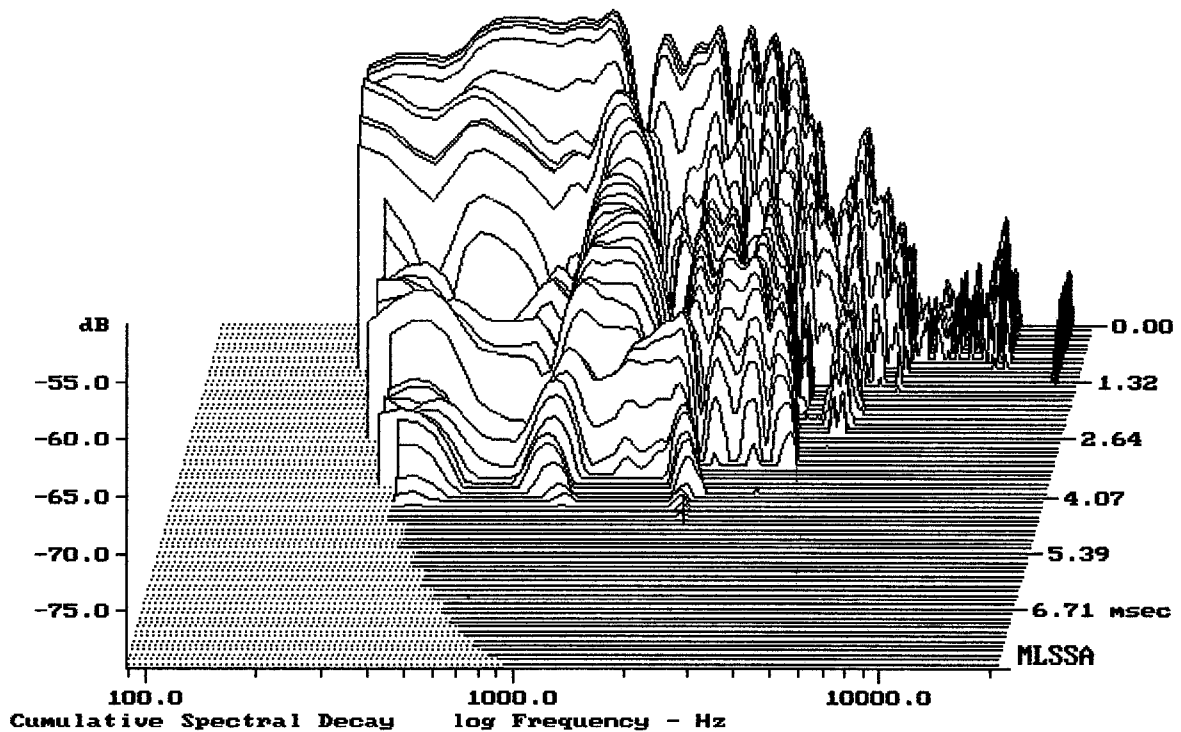

-79.61 dB, 2219 Hz (50), 4.510 msec (42)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.58	Ohms
2	Fs	54.33	Hz
3	Re	12.20	Ohms[dc]
4	Res	59.86	Ohms
5	Qms	4.66	
6	Qes	0.95	
7	Qts	0.79	
8	L1	0.41	mH
9	L2	1.80	mH
10	R2	12.72	Ohms
11	RMSE-load	0.96	Ohms
12	Vas(Sd)	139.02	liters
13	Mms	59.66	grams
14	Cms	144	$\mu\text{M}/\text{Newton}$
15	Bl	16.18	Tesla-M
16	SPLref(Sd)	95.5	dB[Re]
17	Rub-index	0.13	

Method: Mass-loaded (60.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.1% (-20% to -50% is recommended).

15" FROM RCF P3115

MLSSA: Parameters

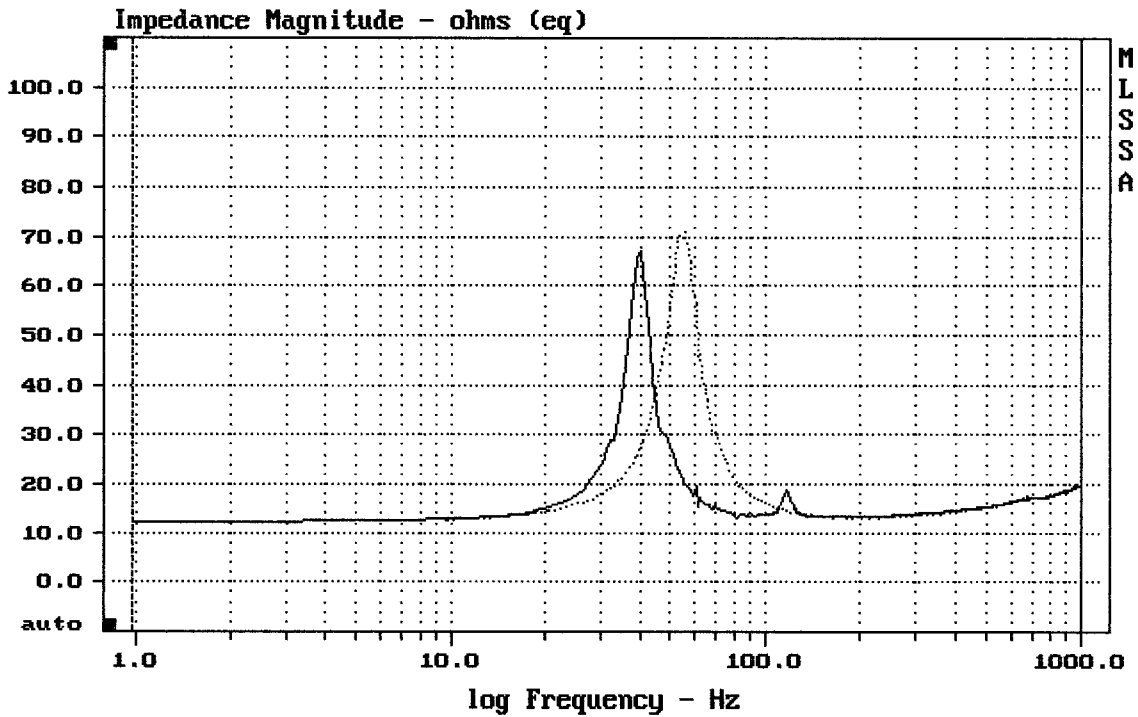

mean: 17.05, rms: 18.23, std: 6.44, max: 71.34, min: 12.26

MLSSA: Frequency Domain