


Level (33:244 Hz) = 95.43 dB SPL/watt (4 ohms, @1.50 meters)


MACKIE SRM1801 PASIVE

MLSSA: Frequency Domain

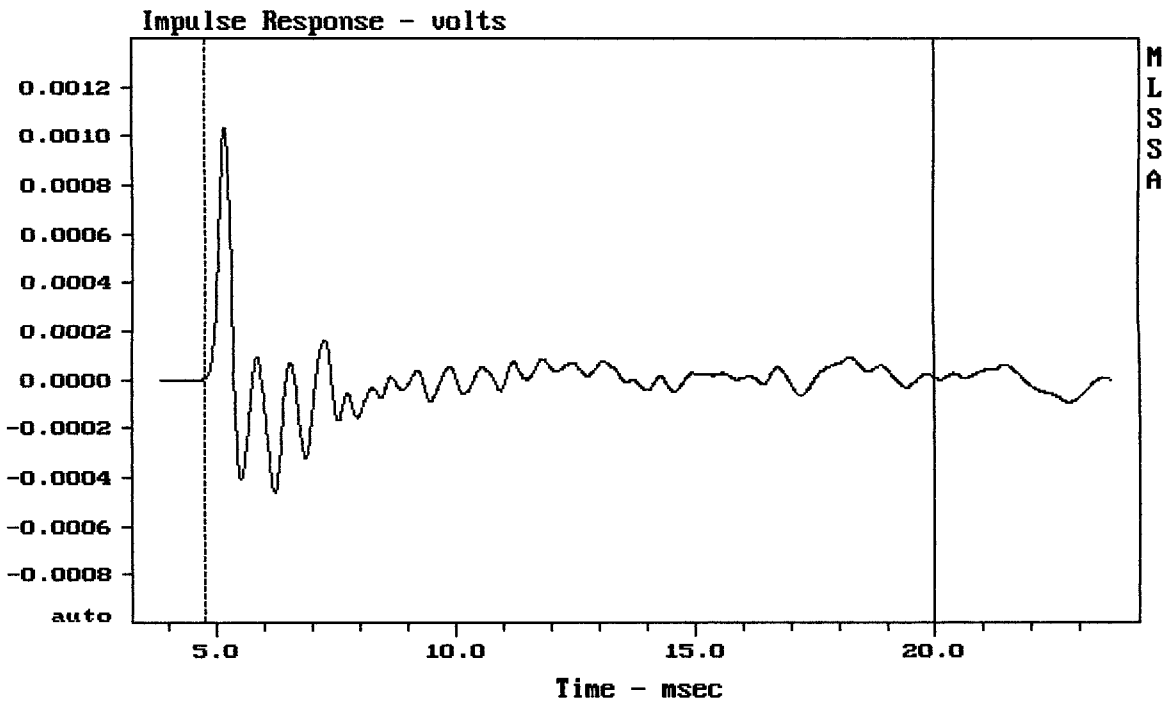

mean: 4.103e-006, rms: 0.0001506, std: 0.0001505, max: 0.001036, min: -0.00046


MACKIE SRM1801 PASIVE

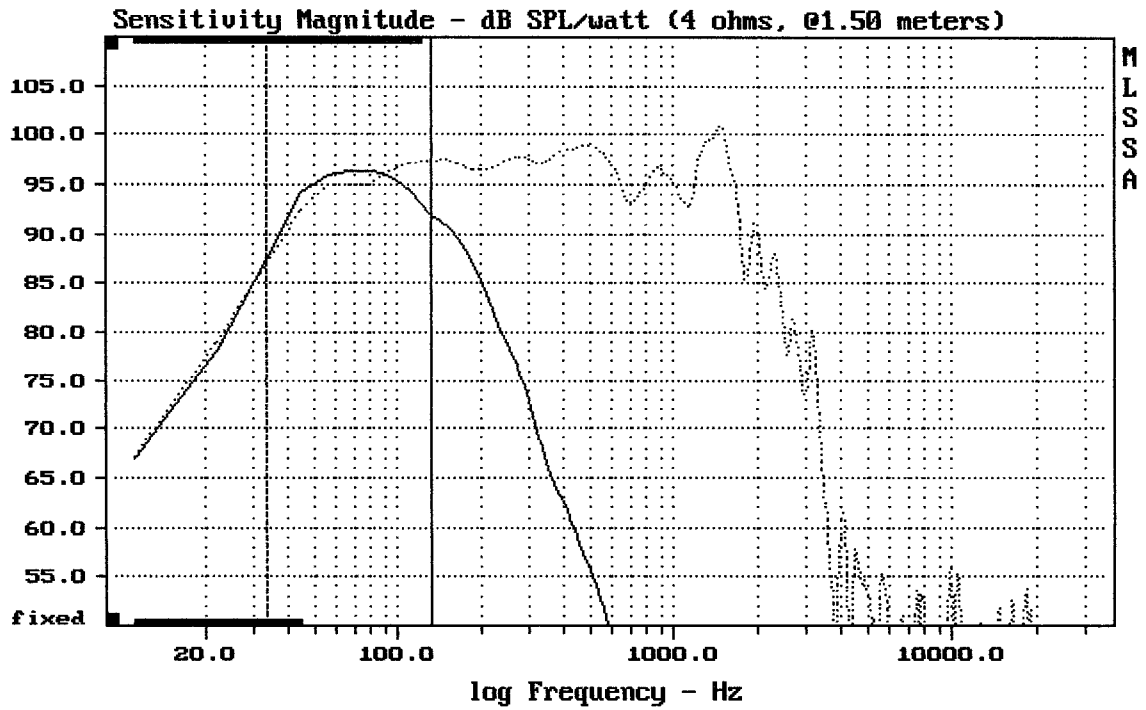

Overlay Compare: dev= +2.5/-4.7, std= 2.5, avg= -0.81


MACKIE SRM1801

MLSSA: Frequency Domain

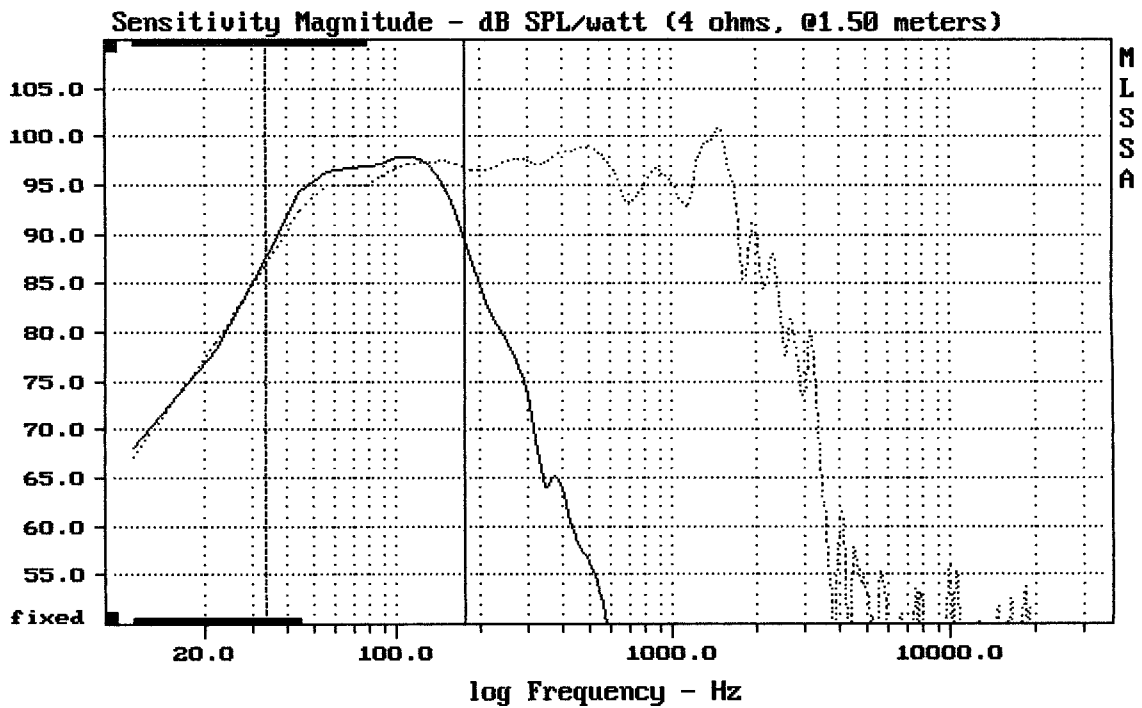

Overlay Compare: dev= +2.5/-7, std= 2.8, avg= -0.52


MACKIE SRM1801

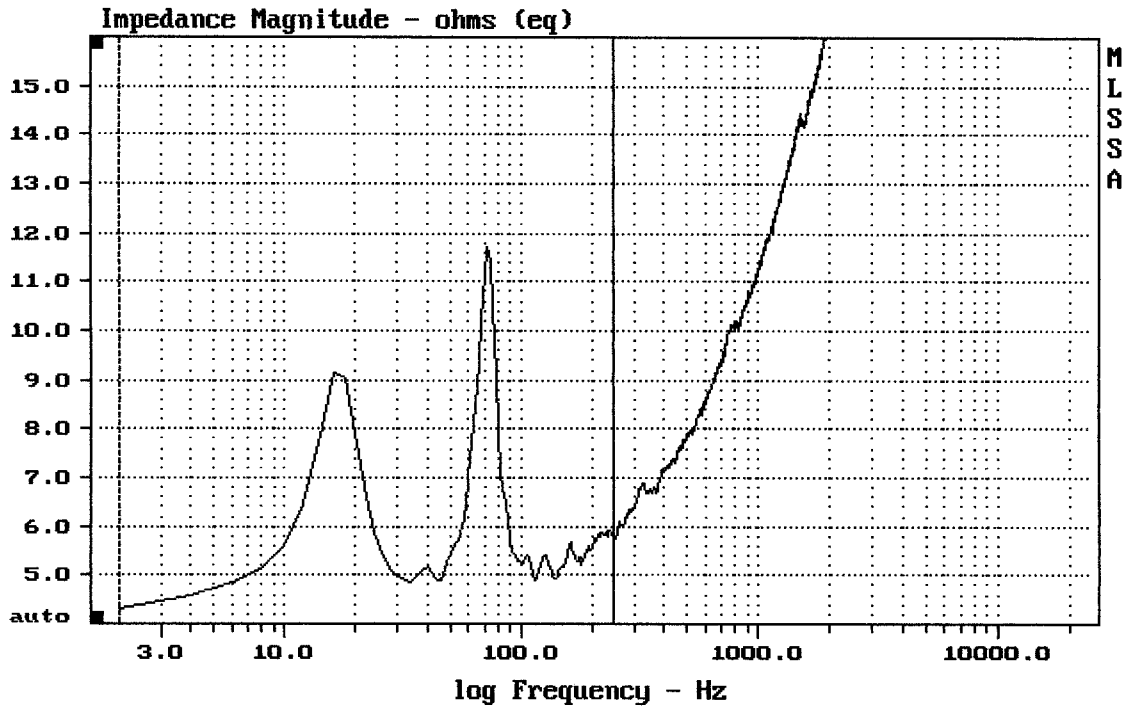


mean: 5.925, rms: 6.086, std: 1.392, max: 11.7, min: 4.294

MACKIE SRM1801

MLSSA: Frequency Domain

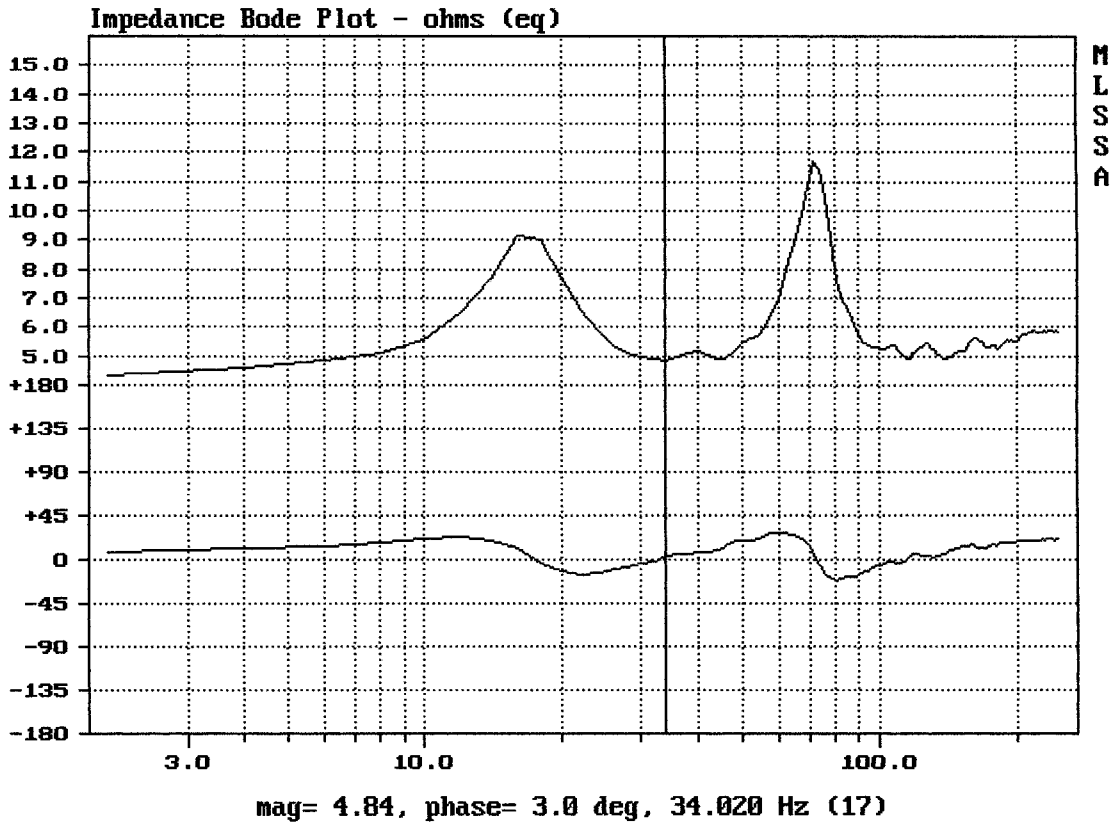


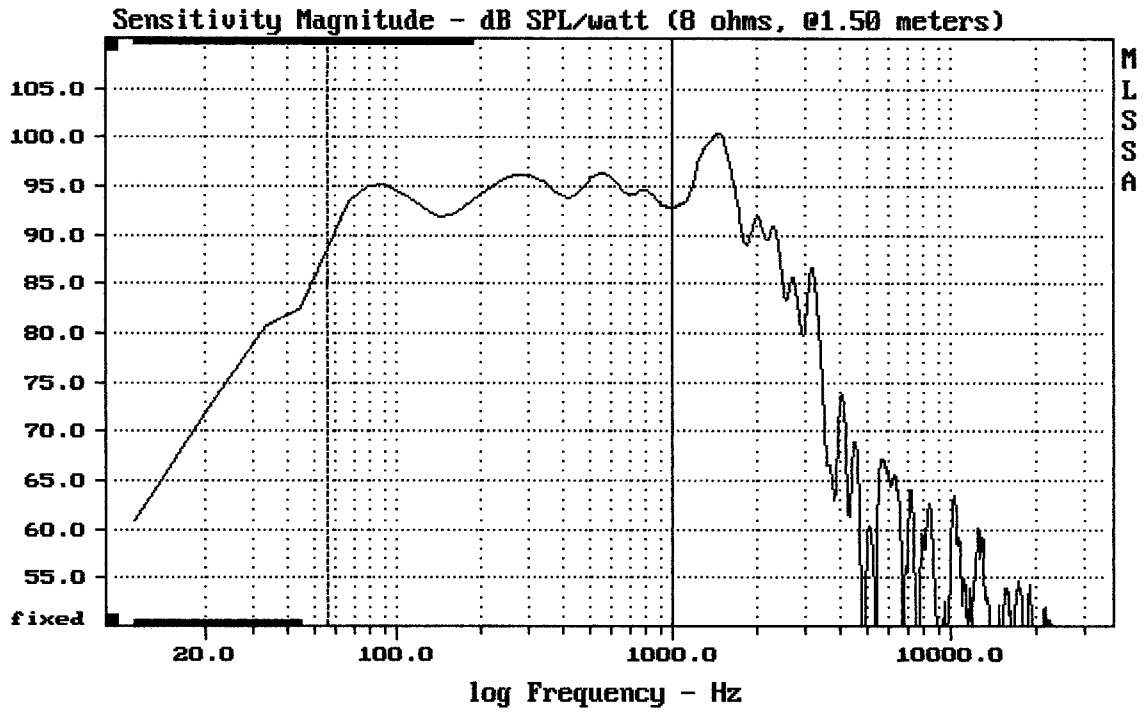

Level (55.999 Hz) = 94.34 dB SPL/watt (8 ohms, @1.50 meters)


18" FROM MACKIE SRM1801

MLSSA: Frequency Domain

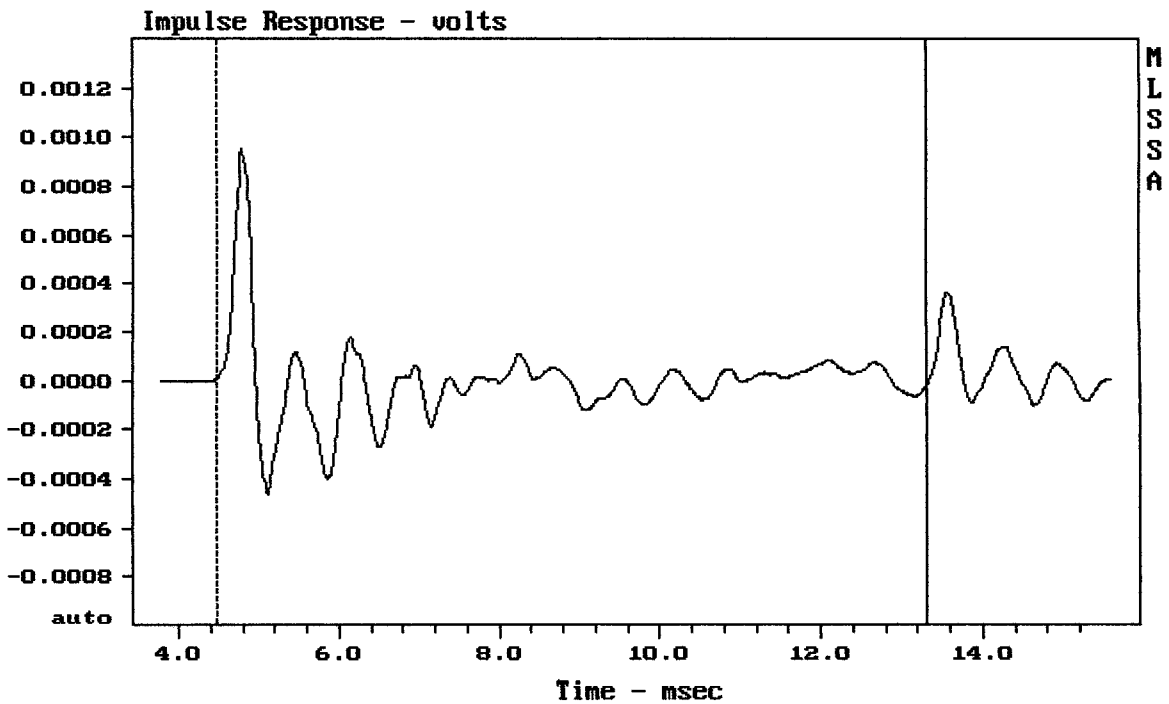

mean: -3.814e-006, rms: 0.0001678, std: 0.0001677, max: 0.0009559, min: -0.000


18" FROM MACKIE SRM1801

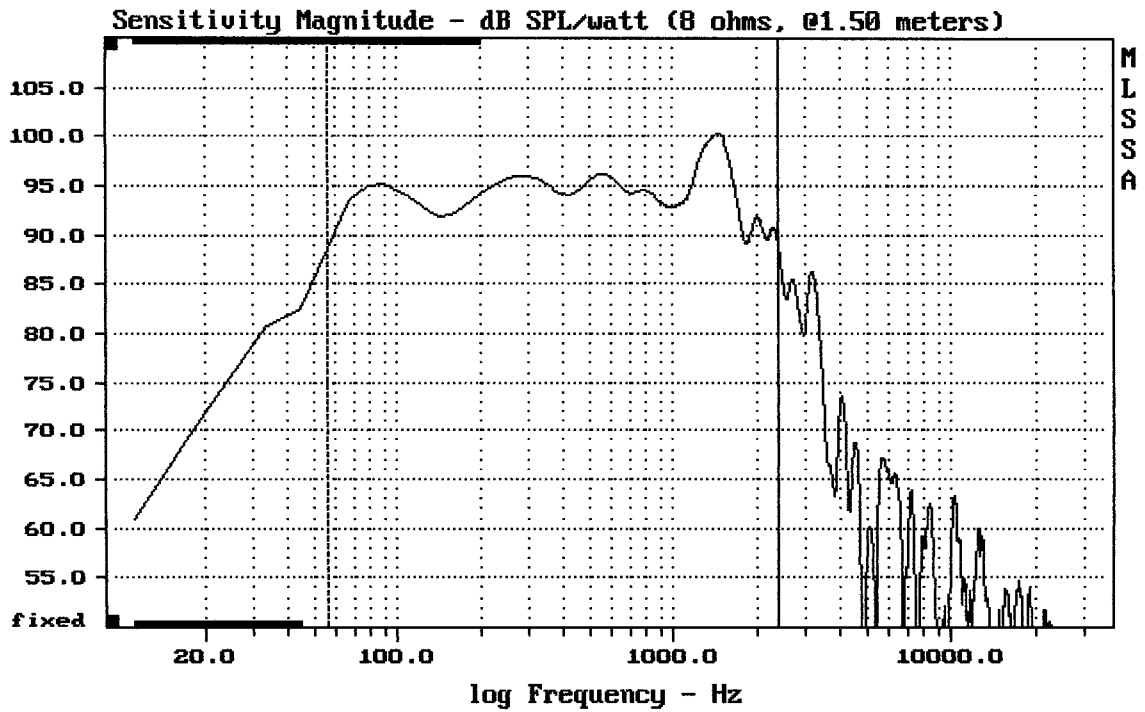

Level (55:2408 Hz) = 94.73 dB SPL/watt (8 ohms, @1.50 meters)

18" FROM MACKIE SRM1801

MLSSA: Frequency Domain

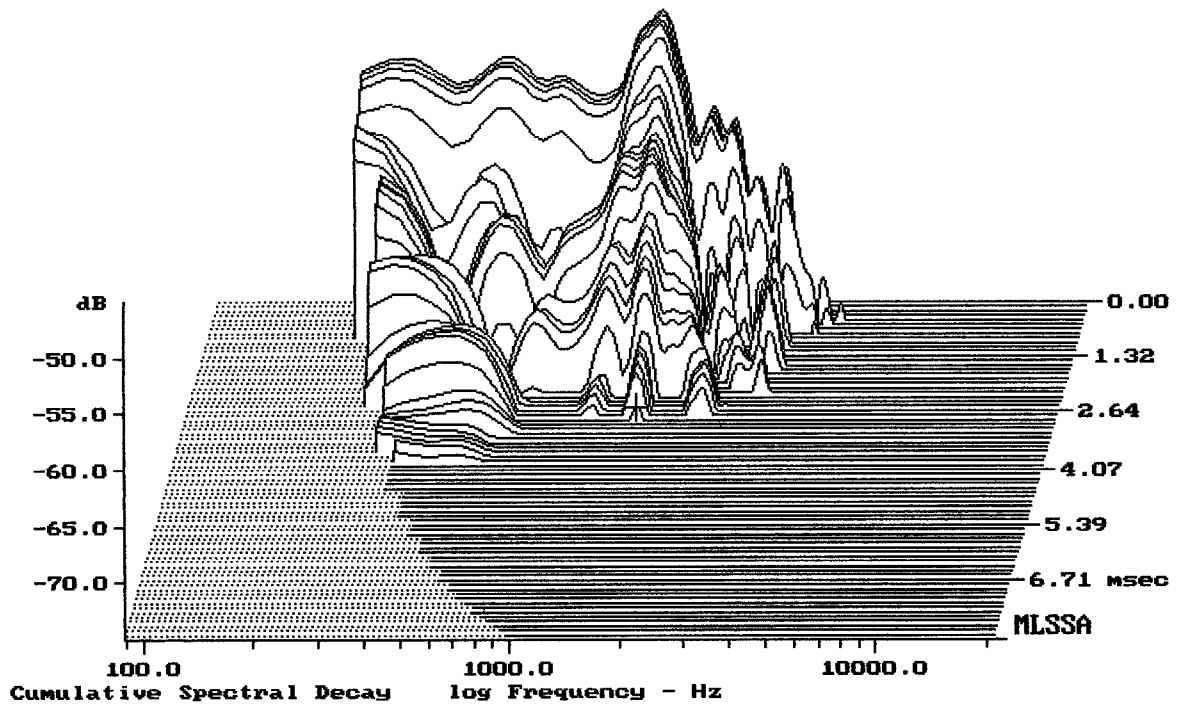

-73.86 dB, 1509 Hz (34), 2.860 msec (27)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.39	Ohms
2	Fs	31.78	Hz
3	Re	3.78	Ohms[dc]
4	Res	20.64	Ohms
5	Qms	4.71	
6	Qes	0.86	
7	Qts	0.73	
8	L1	0.86	mH
9	L2	1.24	mH
10	R2	5.30	Ohms
11	RMSE-load	0.35	Ohms
12	Vas(Sd)	340.80	liters
13	Mms	155.23	grams
14	Cms	162	μM/Newton
15	Bl	11.66	Tesla-M
16	SPLref(Sd)	92.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1225.42 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.6% (-20% to -50% is recommended).


P/N 2033568 REV A00 FROM SRM1801

MLSSA: Parameters

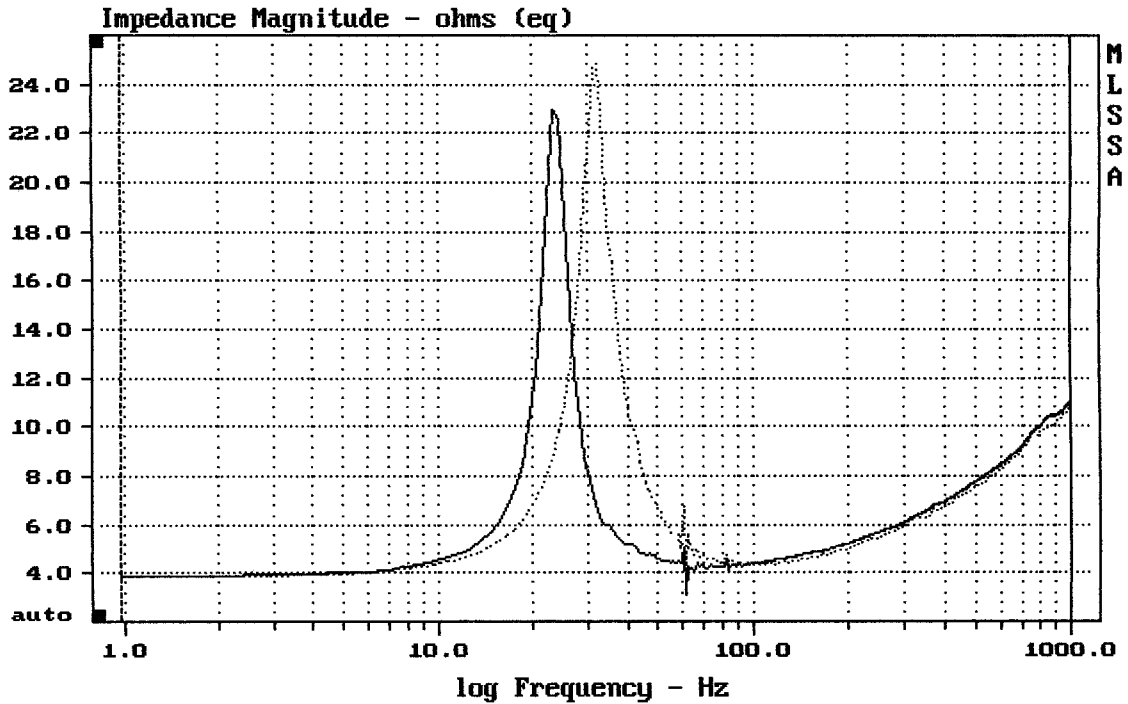

mean: 7.743, rms: 8.105, std: 2.395, max: 24.82, min: 3.856


MLSSA: Frequency Domain

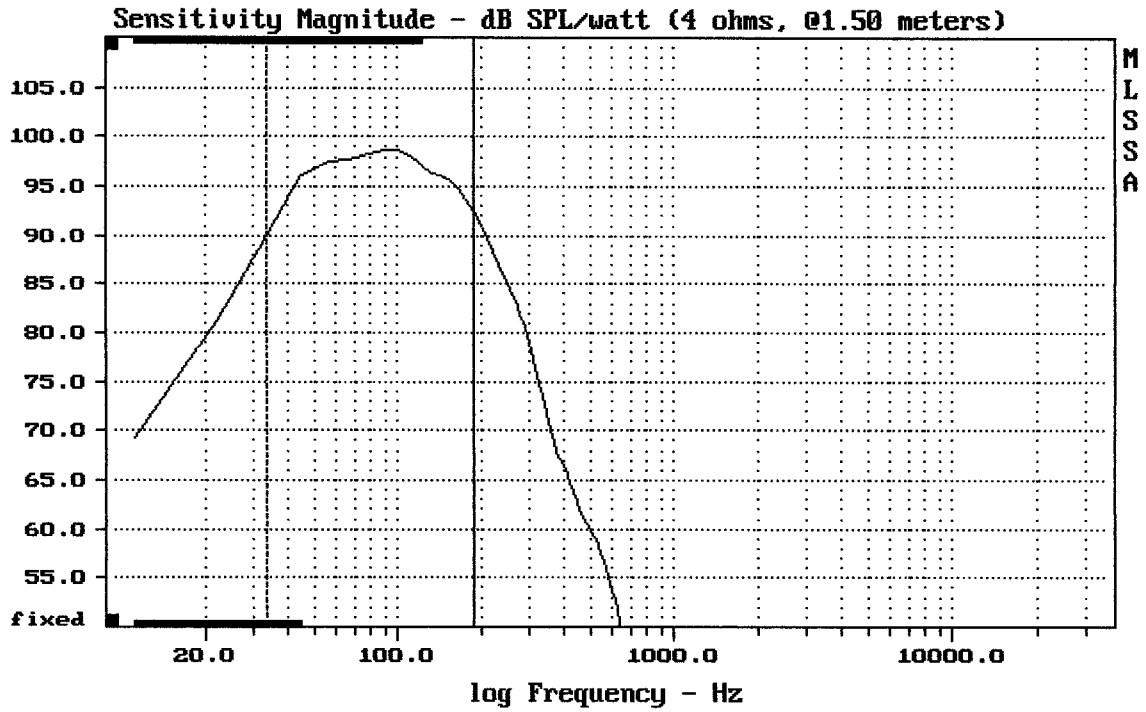

Level (33:189 Hz) = 96.54 dB SPL/watt (4 ohms, @1.50 meters)

SRM1801 + 18PS76/4ohm

MLSSA: Frequency Domain

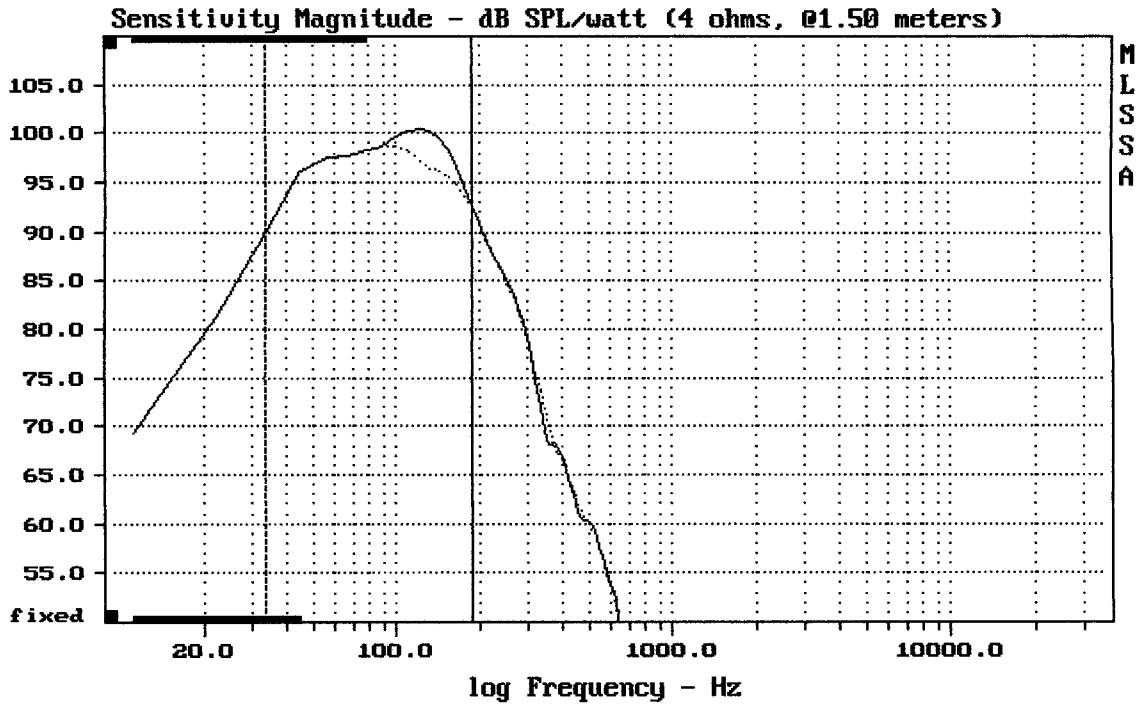

mean: 96.40, rms: 96.64, std: 1.87, max: 98.75, min: 89.99

SRM1801 + 18PS76/4ohm