


Level (100:4750 Hz) = 98.16 dB SPL/watt (8 ohms, @1.50 meters)

PA-X15HB

MLSSA: Frequency Domain

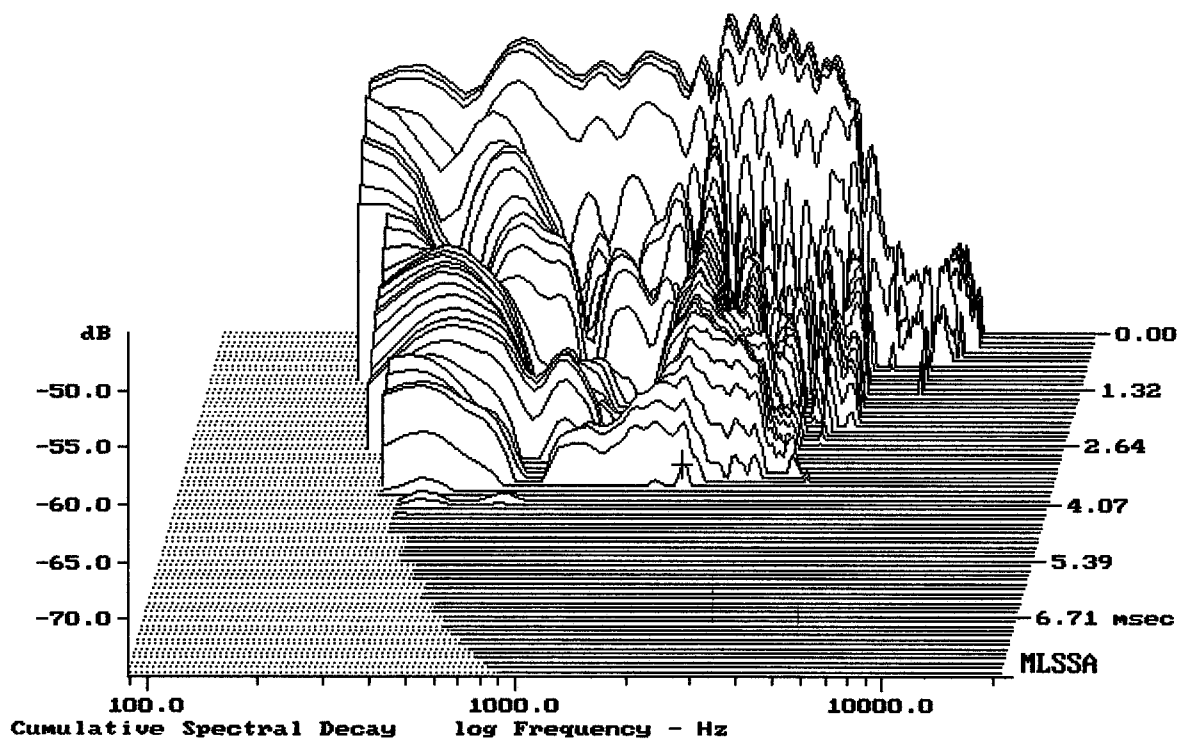

-73.04 dB, 2042 Hz (46), 3.630 msec (34)

## Measured Data

## QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.26	Ohms
2	Fs	38.44	Hz
3	Re	5.62	Ohms[dc]
4	Res	66.48	Ohms
5	Qms	7.25	
6	Qes	0.61	
7	Qts	0.56	
8	L1	0.69	mH
9	L2	0.91	mH
10	R2	2.38	Ohms
11	RMSE-load	0.20	Ohms
12	Vas(Sd)	272.40	liters
13	Mms	60.82	grams
14	Cms	282	$\mu\text{M}/\text{Newton}$
15	B1	11.61	Tesla-M
16	SPLref(Sd)	95.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.5% (-20% to -50% is recommended).

PA-X15HB

MLSSA: Parameters

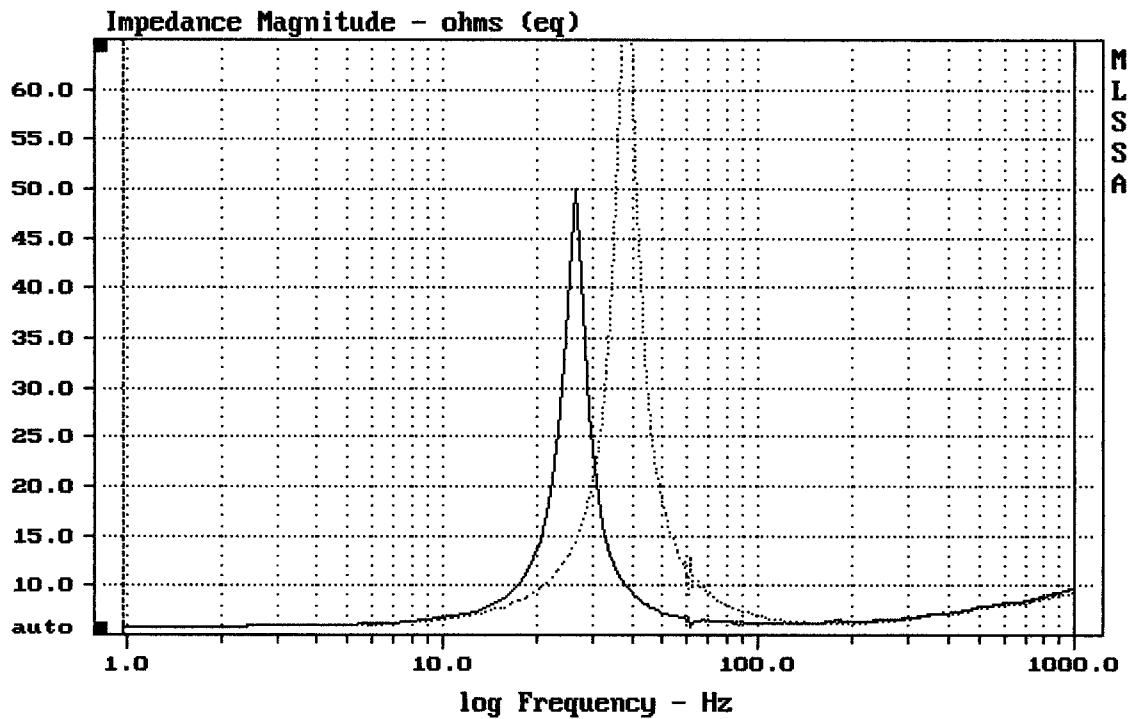


---

 mean: 8.472, rms: 9.931, std: 5.181, max: 72.12, min: 5.751
 

---

MLSSA: Frequency Domain