


Level (100:6303 Hz) = 94.49 dB SPL/watt (8 ohms, @1.00 meters)

SELENIUM 10B1

MLSSA: Frequency Domain

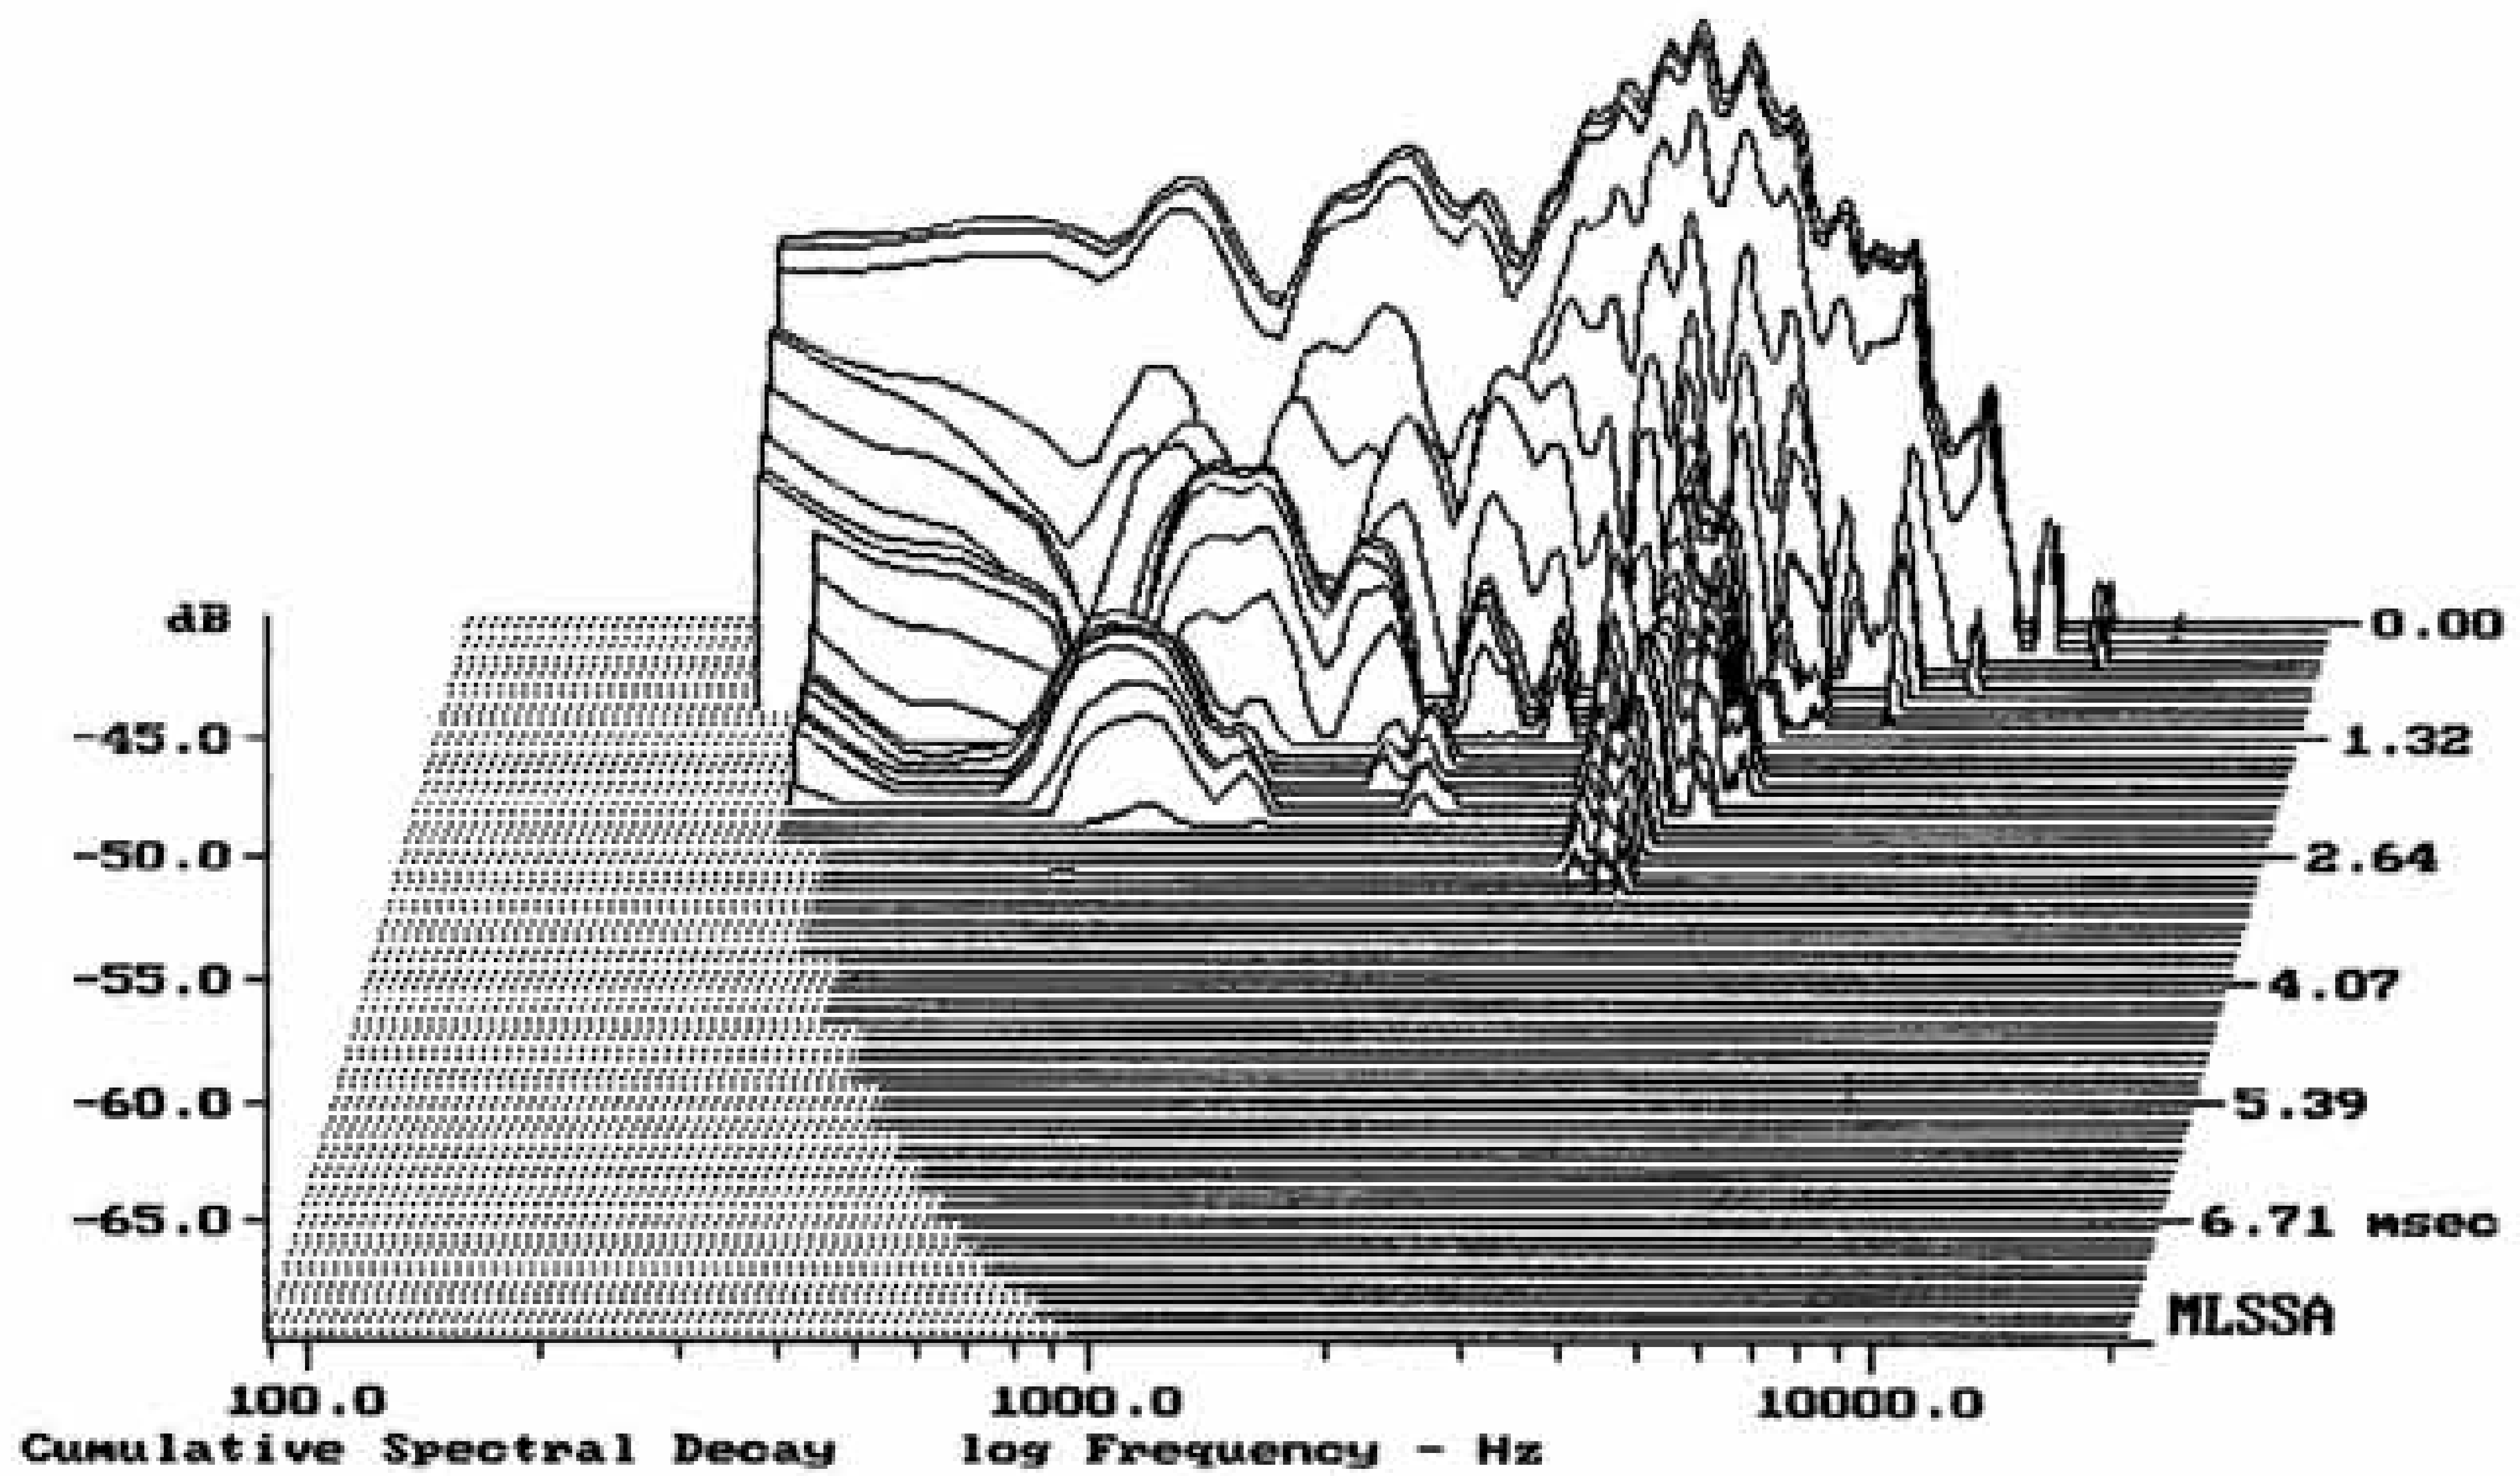

-69.66 dB, 3018 Hz (68), 2.860 msec (27)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.30	Ohms
2	Fs	73.46	Hz
3	Re	5.12	Ohms[dc]
4	Res	79.58	Ohms
5	Qms	13.82	
6	Qes	0.89	
7	Qts	0.84	
8	L1	0.51	mH
9	L2	0.79	mH
10	R2	3.31	Ohms
11	RMSE-load	0.54	Ohms
12	Vas(Sd)	37.22	liters
13	Mms	21.25	grams
14	Cms	221	$\mu\text{M}/\text{Newton}$
15	B1	7.52	Tesla-M
16	SPLref(Sd)	94.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (30.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.7% (-20% to -50% is recommended).

SELENIUM 10B1

MLSSA: Parameters

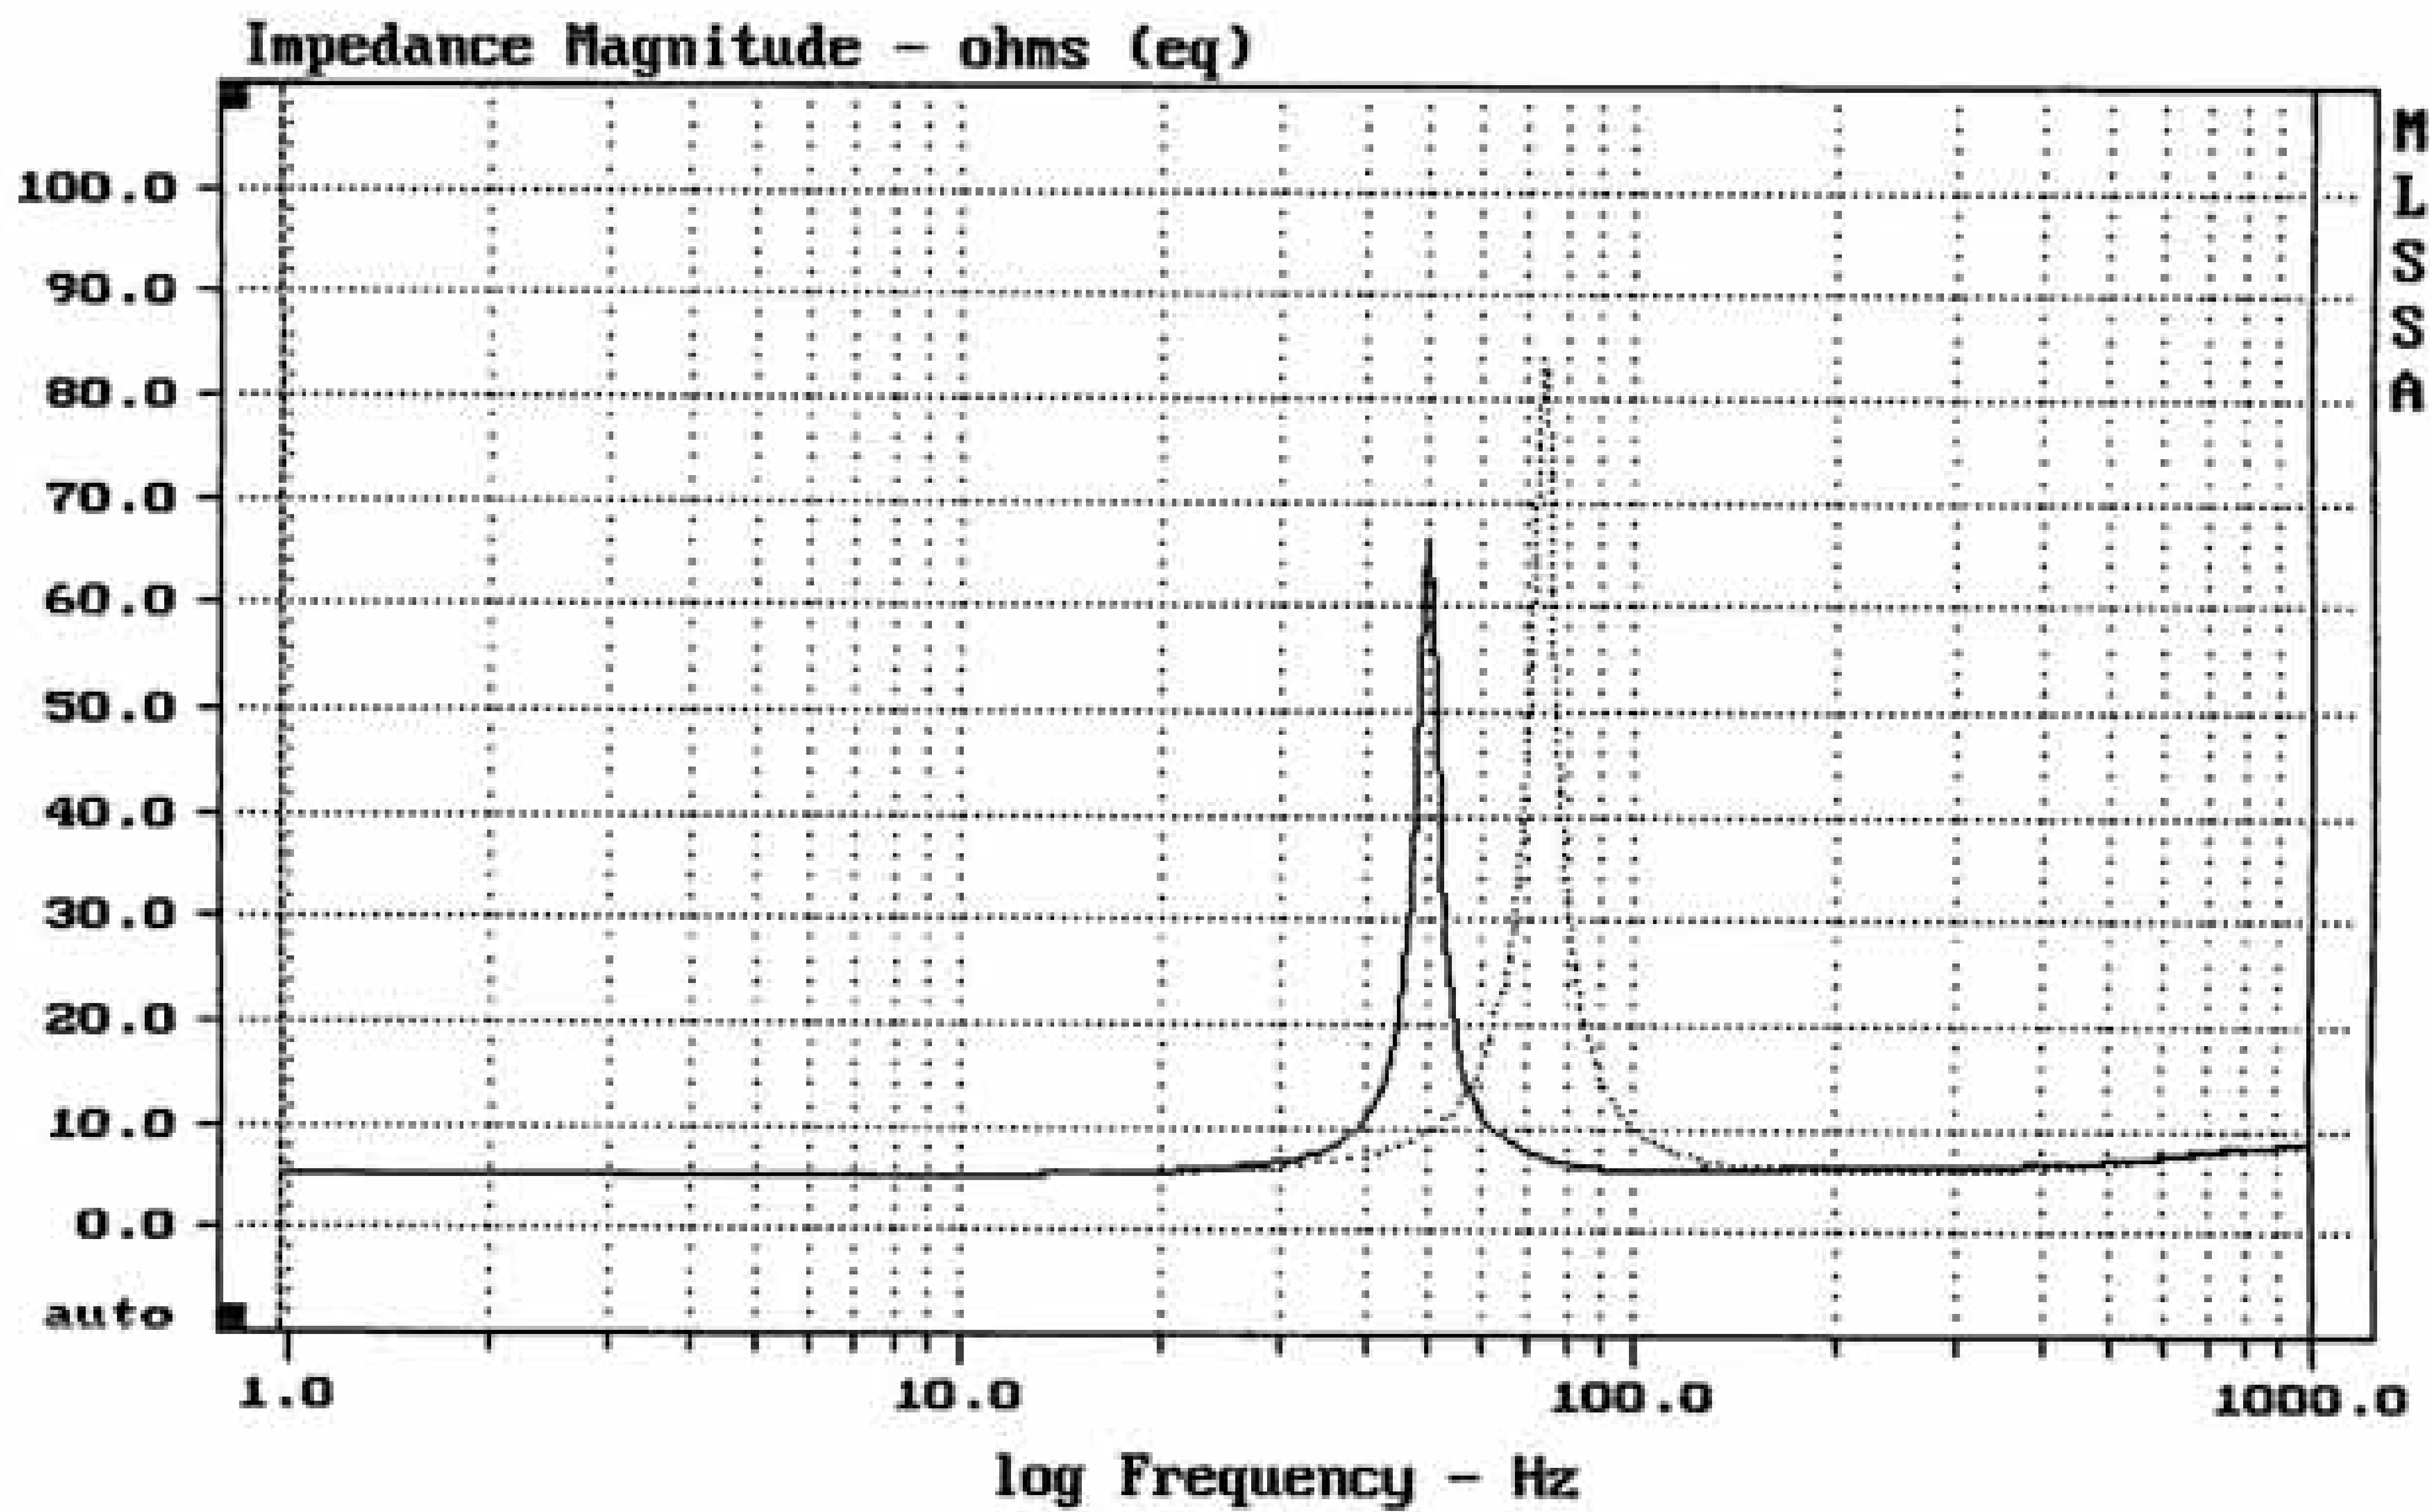

 mean: 8.103, rms: 10.28, std: 6.329, max: 83.71, min: 5.176

MLSSA: Frequency Domain