

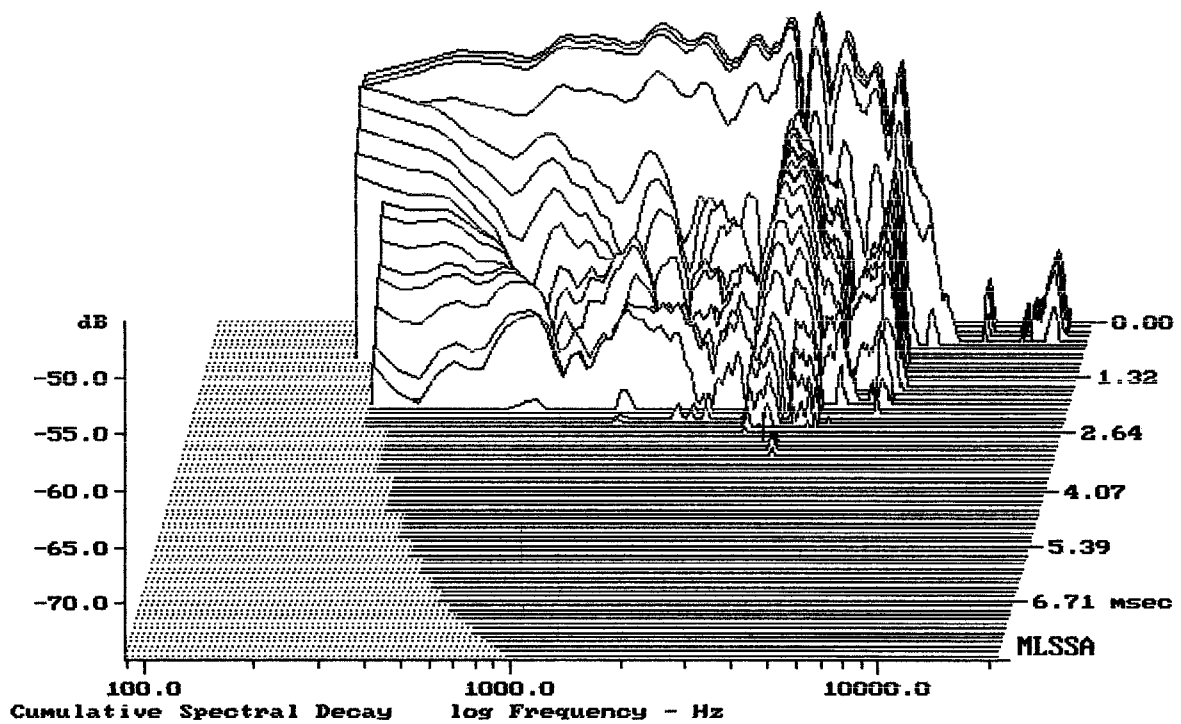

---

Level (100:6603 Hz) = 94.96 dB SPL/watt (8 ohms, @1.00 meters)

---

10CL51

MLSSA: Frequency Domain



-74.88 dB, 3240 Hz (73), 2.530 msec (24)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.40	Ohms
2	Fs	63.03	Hz
3	Re	5.13	Ohms[dc]
4	Res	37.55	Ohms
5	Qms	3.81	
6	Qes	0.52	
7	Qts	0.46	
8	L1	0.39	mH
9	L2	0.81	mH
10	R2	3.70	Ohms
11	RMSE-load	0.28	Ohms
12	Vas(Sd)	21.69	liters
13	Mms	49.52	grams
14	Cms	129	$\mu\text{M}/\text{Newton}$
15	Bl	13.91	Tesla-M
16	SPLref(Sd)	92.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm

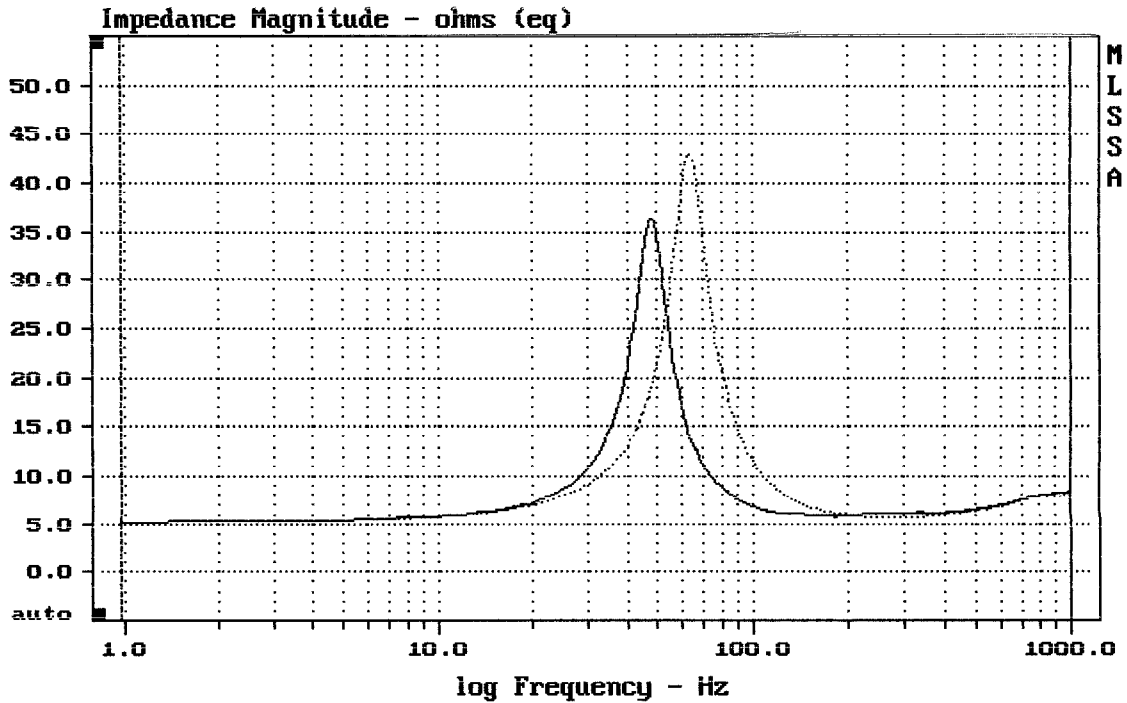
DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.6% (-20% to -50% is recommended).

10CL51

MLSSA: Parameters



mean: 8.015, rms: 9.329, std: 4.775, max: 43, min: 5.158

MLSSA: Frequency Domain