

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.62	Ohms
2	Fs	32.21	Hz
3	Re	3.27	Ohms[dc]
4	Res	90.76	Ohms
5	Qms	8.30	
6	Qes	0.30	
7	Qts	0.29	
8	L1	1.04	mH
9	L2	1.33	mH
10	R2	4.55	Ohms
11	RMSE-load	0.54	Ohms
12	Vas(Sd)	269.01	liters
13	Mms	352.11	grams
14	Cms	69	$\mu\text{M}/\text{Newton}$
15	Bl	27.91	Tesla-M
16	SPLref(Sd)	96.6	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (260.00 grams)

Area (Sd): 1661.90 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -22.9% (-20% to -50% is recommended).

21SW150-4


MLSSA: Parameters

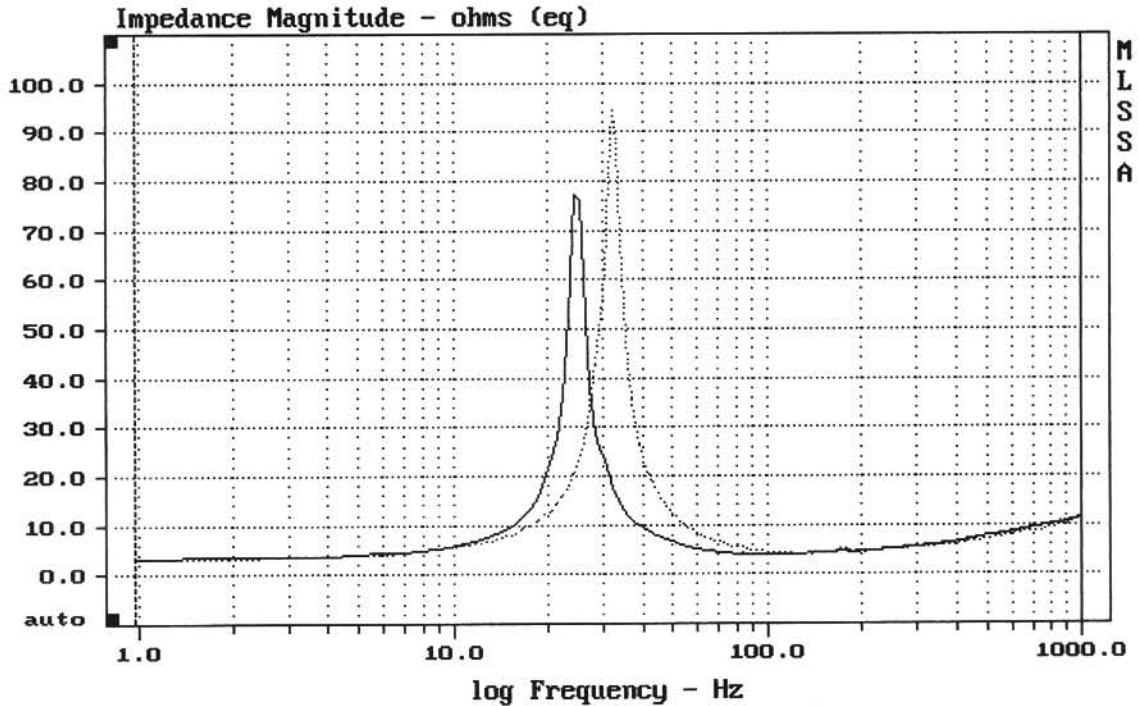

mean: 8.227, rms: 10.39, std: 6.338, max: 94.59, min: 3.308

DTTO


MLSSA: Frequency Domain

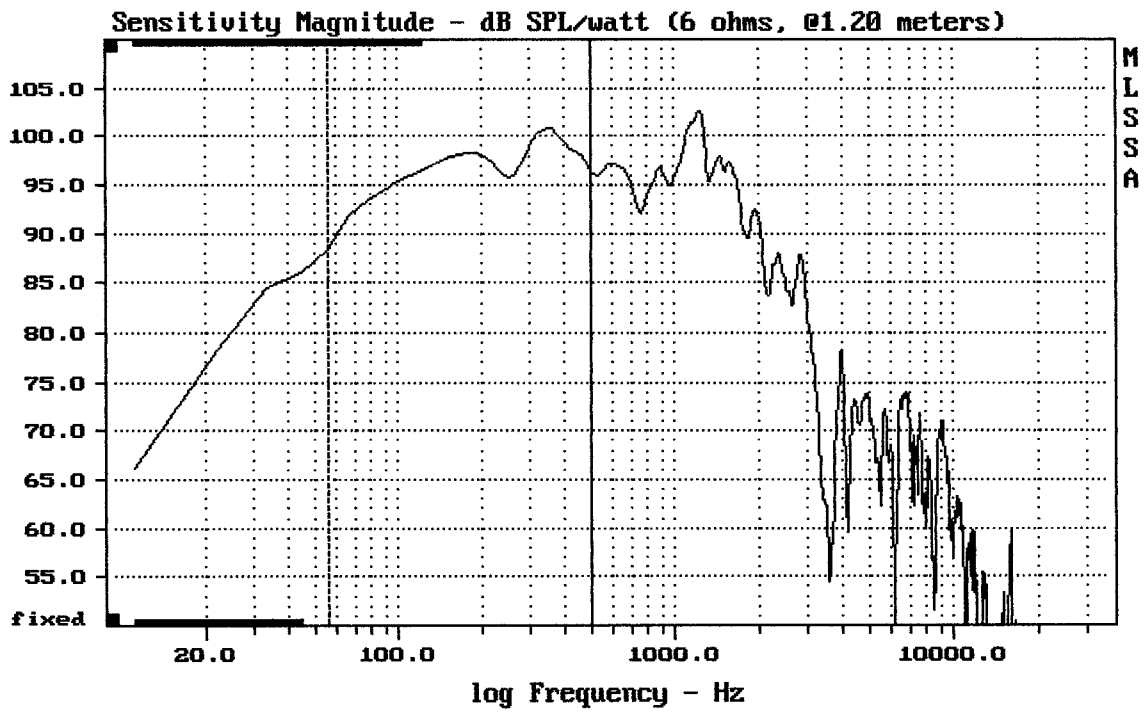

Level (55:499 Hz) = 97.02 dB SPL/watt (6 ohms, @1.20 meters)

21SW150-4

MLSSA: Frequency Domain

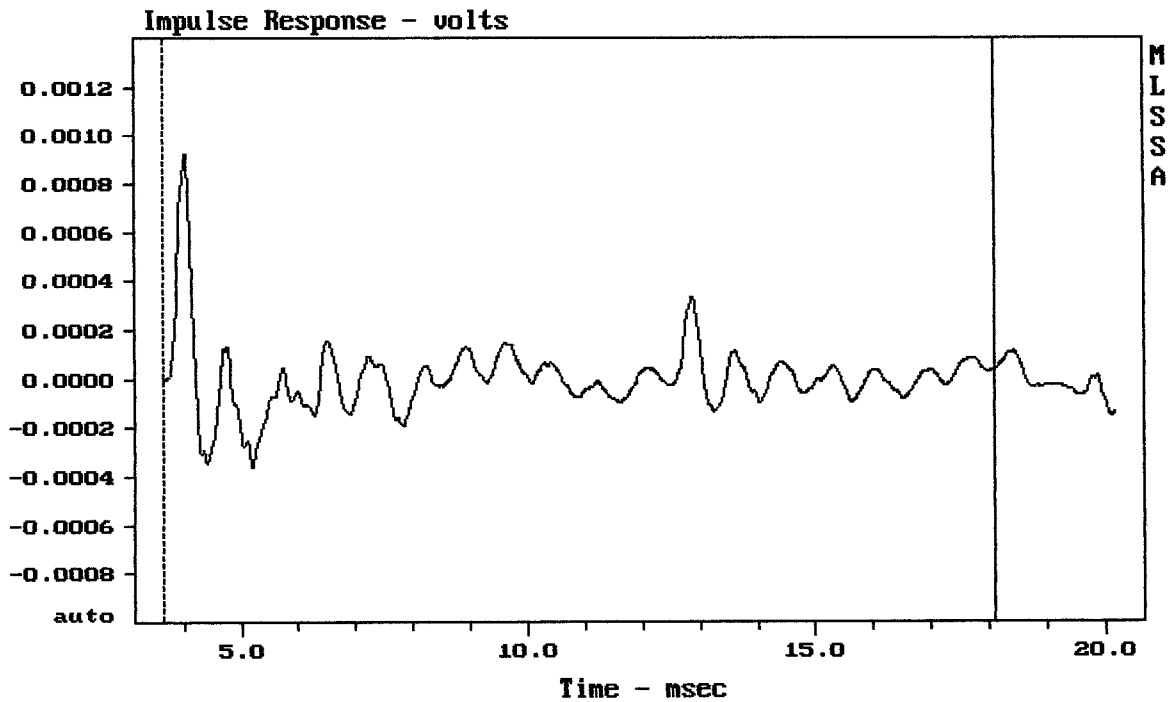

CURSOR: y = 4.1186e-005 x = 18.0840 (1644)

21SW150-4