



E-shop: <http://eshop.prodance.cz/acustica-c3108/d-83937/>

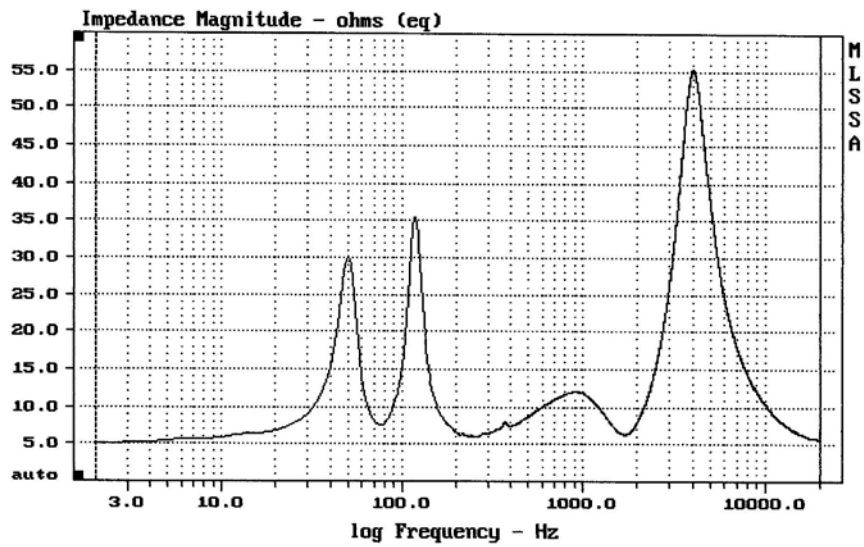

mean: 14.32, rms: 18.84, std: 12.24, max: 55.27, min: 5.017

RCF ACUSTICA C3108 LINEAR


MLSSA: Frequency Domain

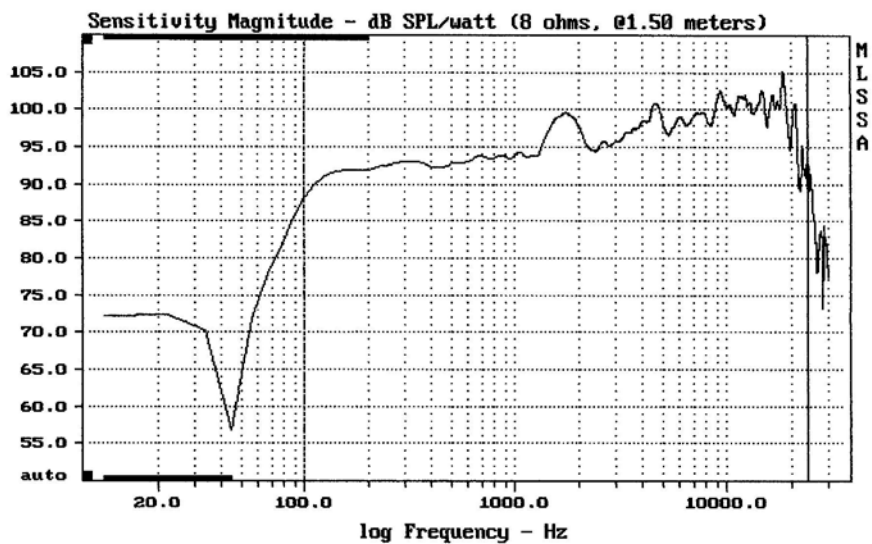

Level (100:24003 Hz) = 96.99 dB SPL/watt (8 ohms, @1.50 meters)

RCF ACUSTICA C3108 LINEAR


<http://eshop.prodance.cz/acustica-c3108/d-83937/>

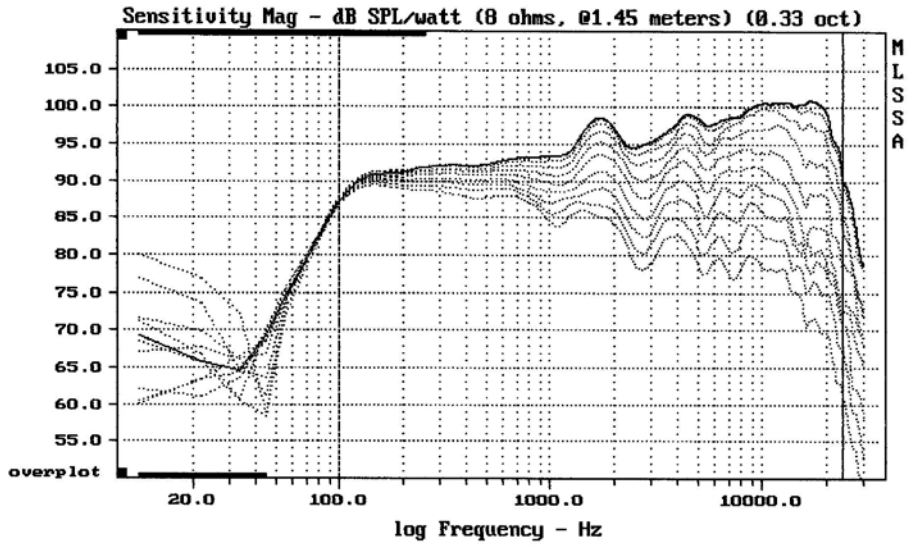

Overlay Compare: dev= +22/-8.9, std= 6.7, avg= -23


RCF ACUSTICA C3108 LINEAR

MLSSA: Frequency Domain

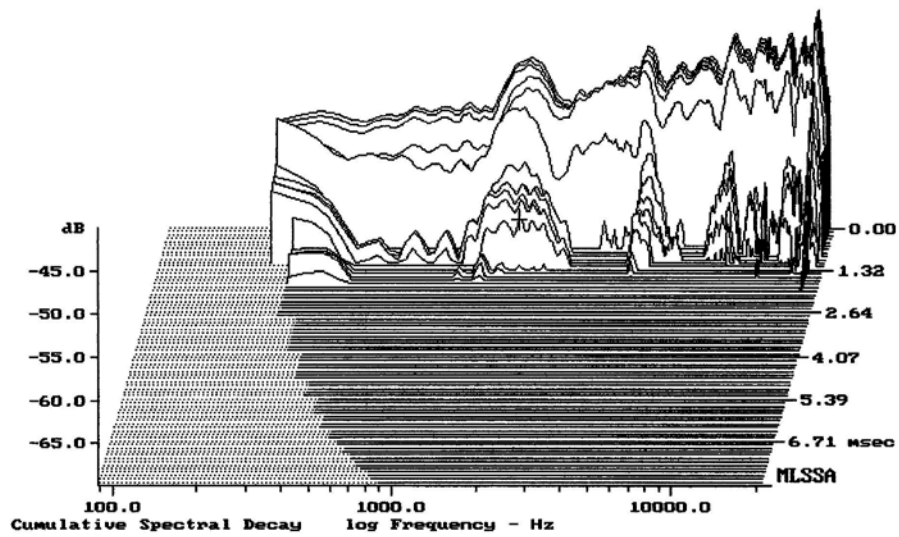

-64.53 dB, 1731 Hz (39), 1.210 msec (12)


<http://eshop.prodance.cz/acustica-c3108/d-83937/>

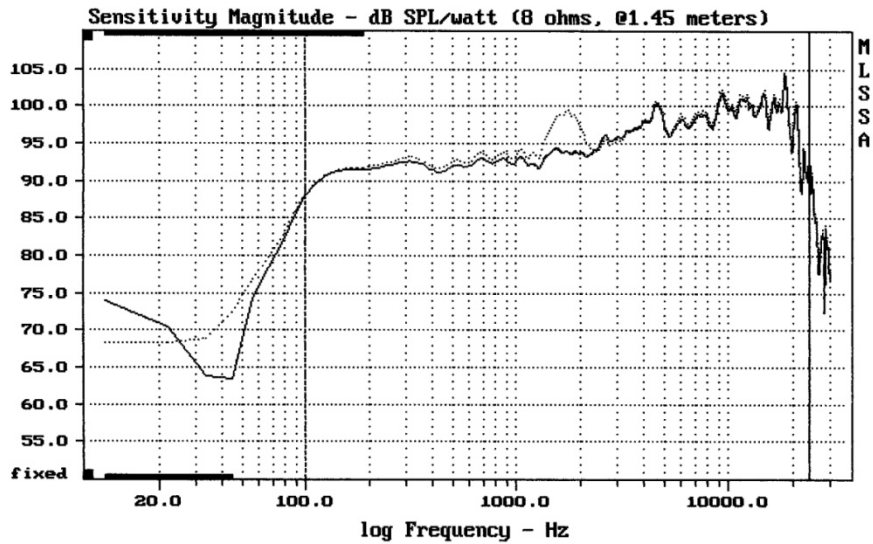


Overlay Compare: dev= +1.2/-5, std= 0.73, avg= -0.54

RCF ACUSTICA C3108 LINEAR


MLSSA: Frequency Domain

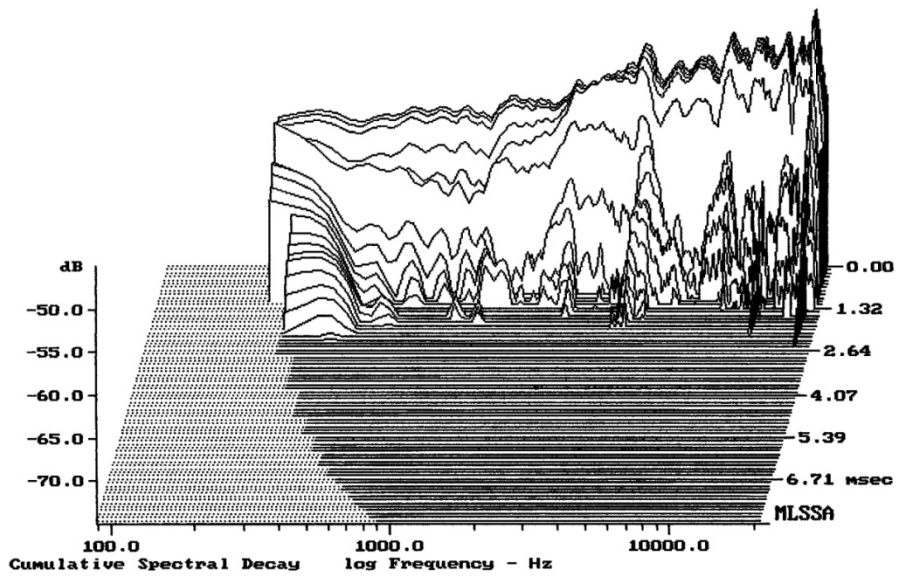

-73.25 dB, 4128 Hz (93), 1.760 msec (17)

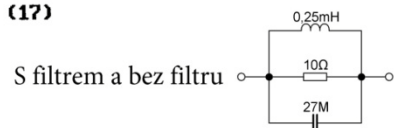


<http://eshop.prodance.cz/acustica-c3108/d-83937/>

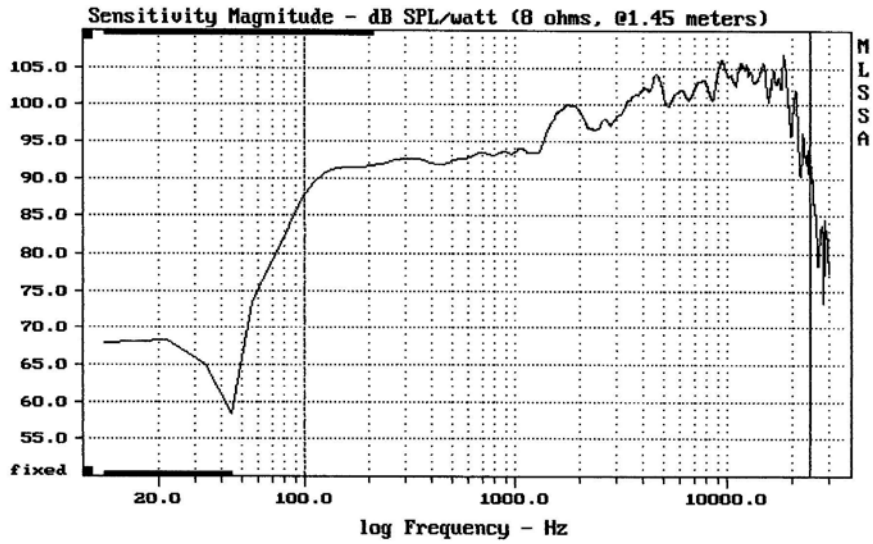

Level (100:24503 Hz) = 99.35 dB SPL/watt (8 ohms, @1.45 meters)

RCF ACUSTICA C3108 HF BOOST


MLSSA: Frequency Domain

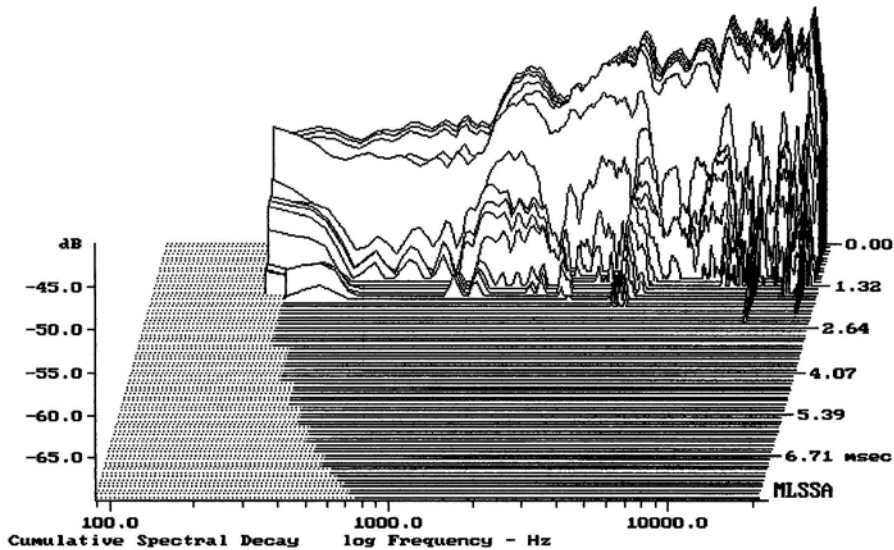

-67.64 dB, 4217 Hz (95), 1.870 msec (18)




<http://eshop.prodance.cz/acustica-c3108/d-83937/>

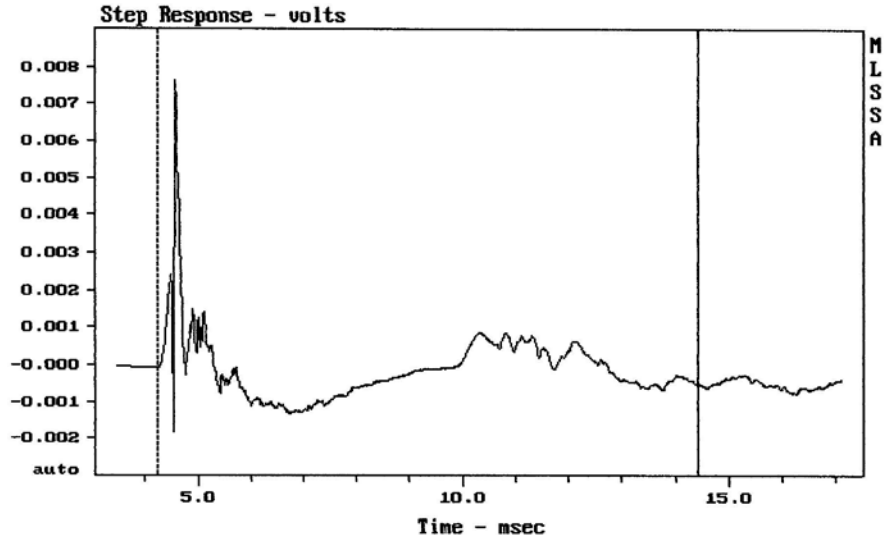

mean: -0.0001252, rms: 0.0008792, std: 0.0008702, max: 0.007621, min: -0.001041

RCF ACUSTICA C3108 HF BOOST


MLSSA: Time Domain

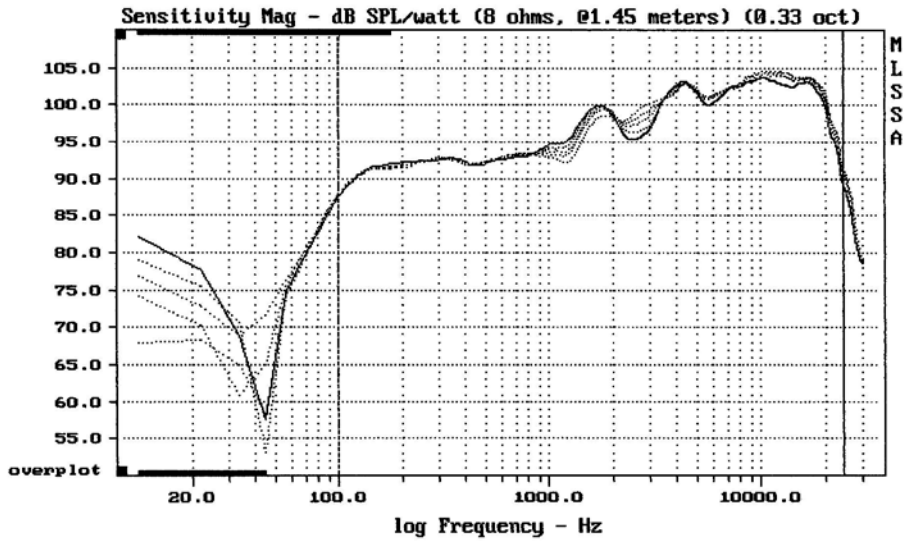

mean: 101.54, rms: 102.01, std: 2.53, max: 104.62, min: 88.03

RCF ACUSTICA C3108 HF BOOST


<http://eshop.prodance.cz/acustica-c3108/d-83937/>

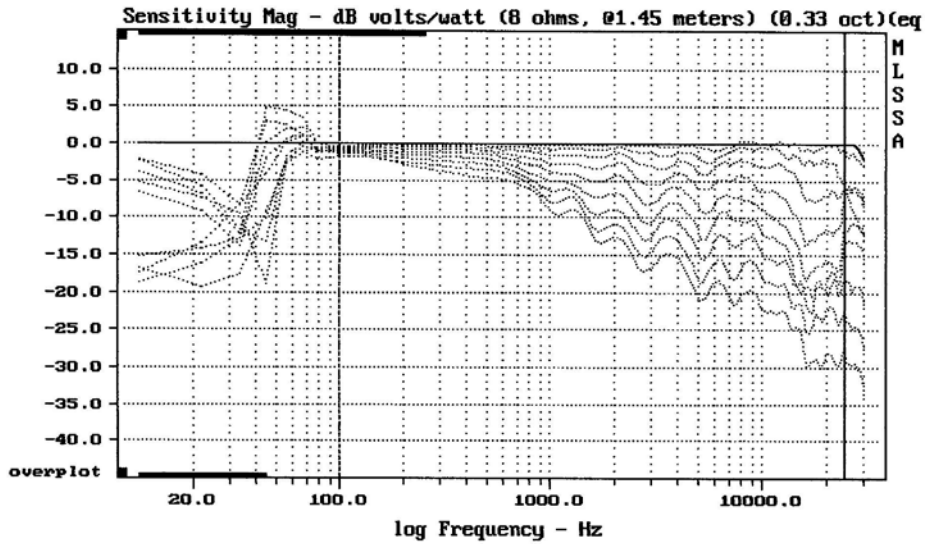

Overlay Compare: dev= +21/-7.3, std= 6.3, avg= -23

RCF ACUSTICA C3108 HF BOOST


MLSSA: Frequency Domain

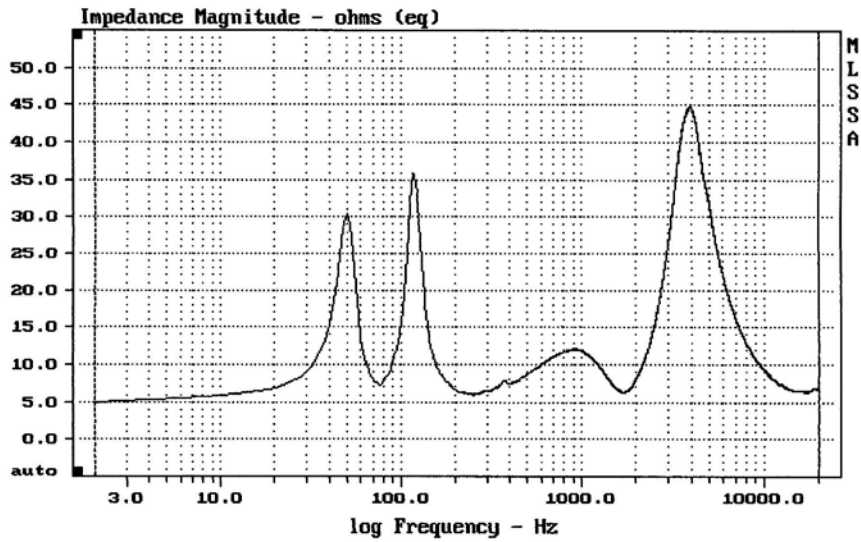

mean: 13.14, rms: 16.56, std: 10.08, max: 44.87, min: 5.015

RCF ACUSTICA C3108 HF BOOST


<http://eshop.prodance.cz/acustica-c3108/d-83937/>

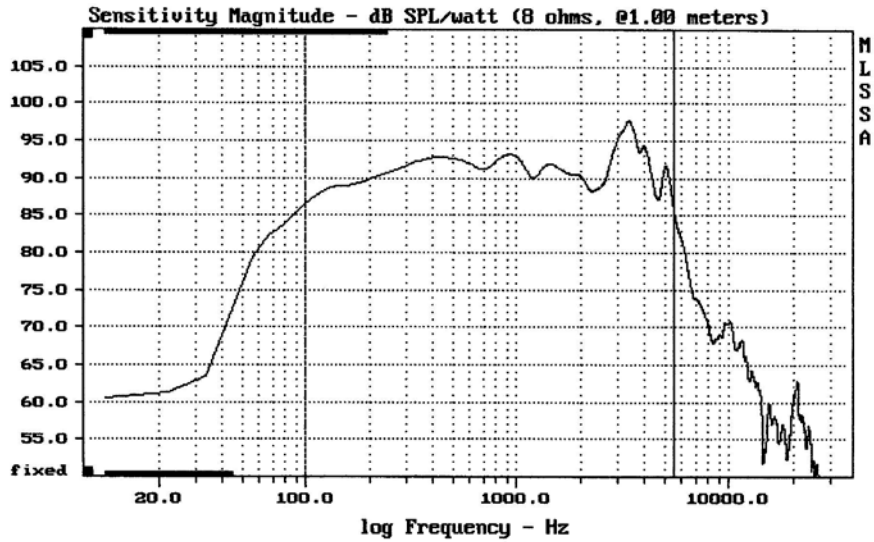

Level (100:5504 Hz) = 91.71 dB SPL/watt (8 ohms, @1.00 meters)

8" RCF FROM ACUSTICA C3108

MLSSA: Frequency Domain

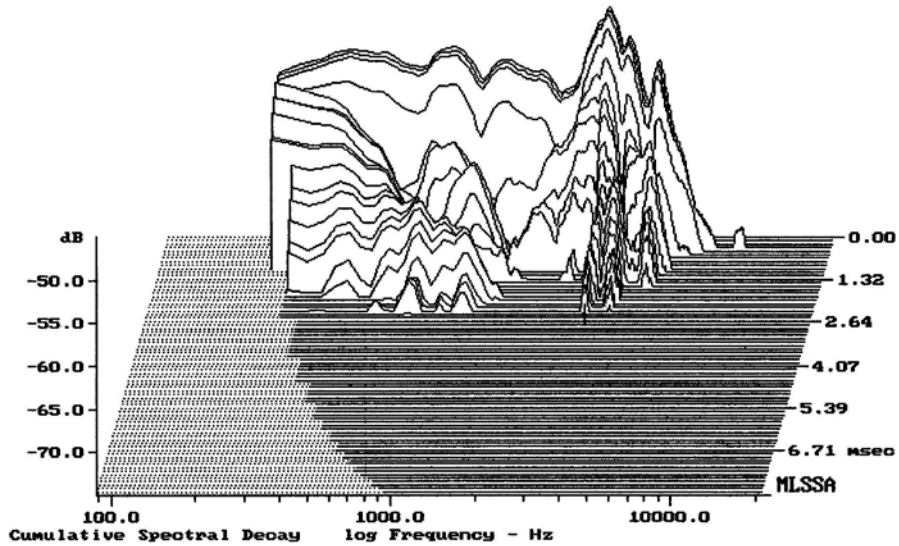

-75.00 dB, 3240 Hz (73), 2.420 msec (23)

MLSSA SPO 4.0D #960903-3057-3075

Line	Parameter	Value	Units	QC Limits
1	RMSE-free	0.38	Ohms	
2	Fs	79.48	Hz	
3	Re	4.88	Ohms[dc]	
4	Res	59.81	Ohms	
5	Qms	5.00		
6	Qes	0.41		
7	Qts	0.38		
8	L1	0.79	mH	
9	L2	1.09	mH	
10	R2	3.88	Ohms	
11	RMSE-load	0.49	Ohms	
12	Vas(Sd)	10.54	liters	
13	Mms	24.42	grams	
14	Cms	164	$\mu\text{M}/\text{Newton}$	
15	B1	12.08	Tesla-M	
16	SPLref(Sd)	93.0	dB[Re]	
17	Rub-index	0.01		

Method: Mass-loaded (20.00 grams)

Area (Sd): 213.82 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.4% (-20% to -50% is recommended).

8" RCF FROM ACUSTICA C3108

MLSSA: Parameters

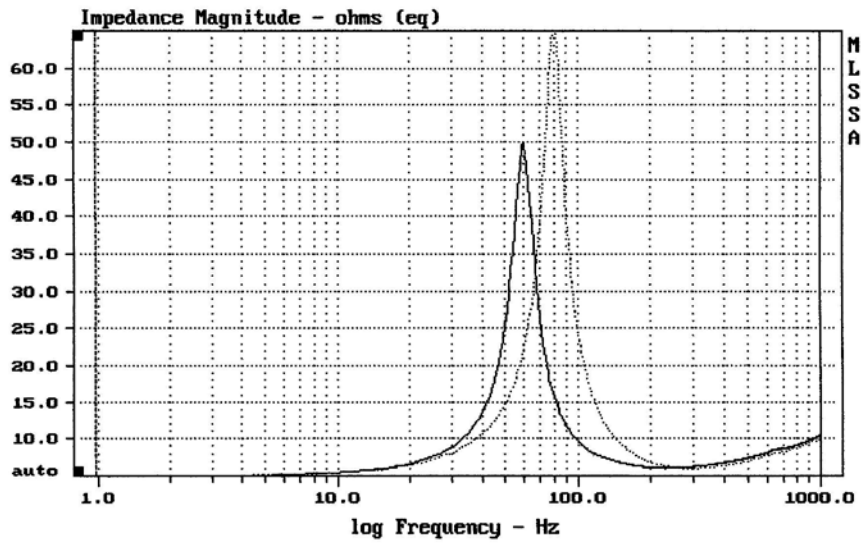

mean: 9.578, rms: 12.23, std: 7.602, max: 65.14, min: 4.941

MLSSA: Frequency Domain