



RCF ART 500

MLSSA: Frequency Domain

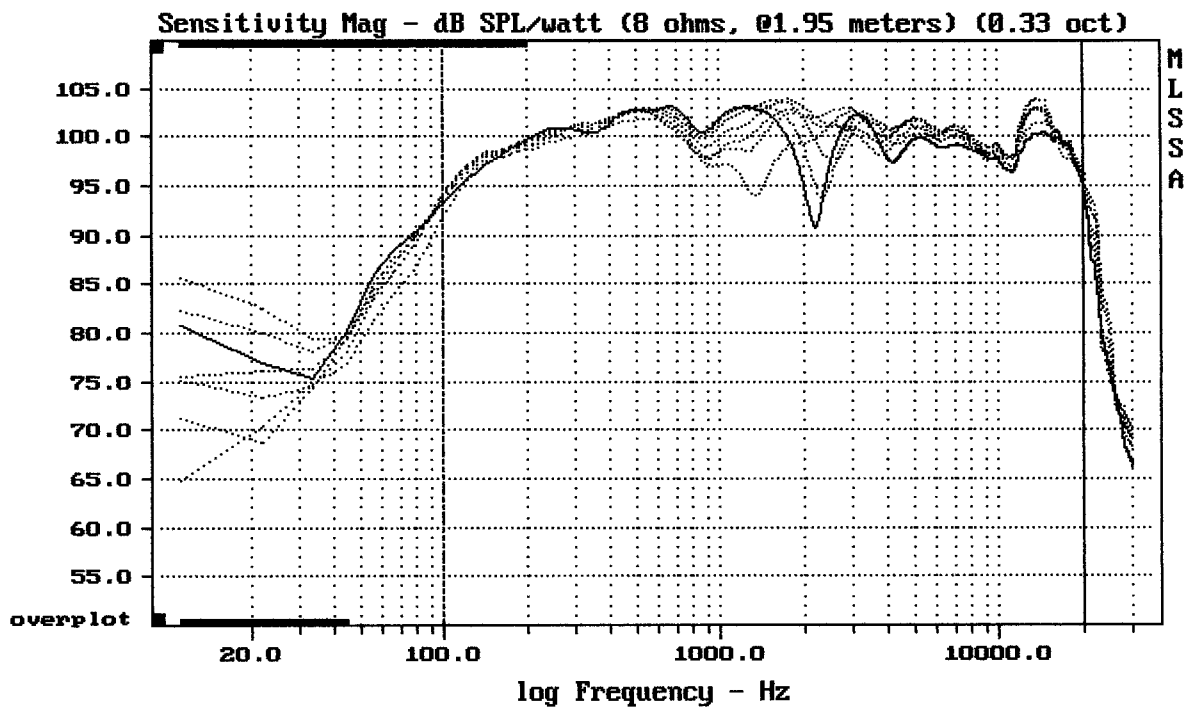


RCF ART 500

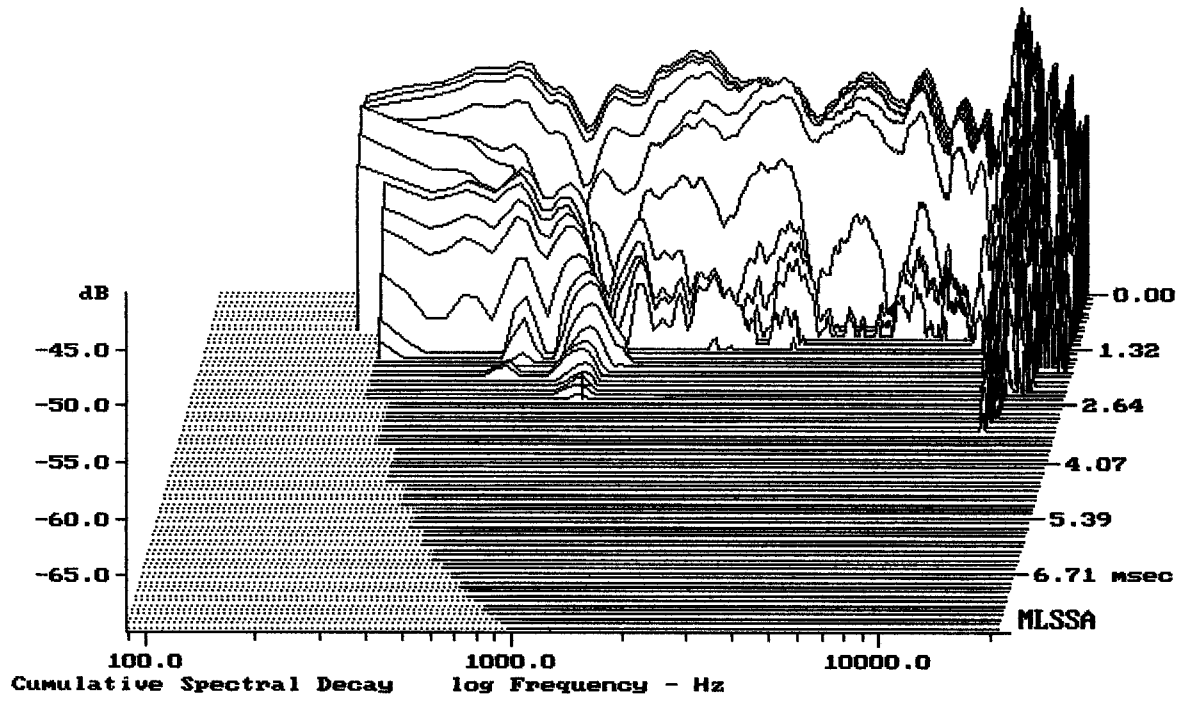


-69.16 dB, 1021 Hz (23), 2.420 msec (23)

DTTO

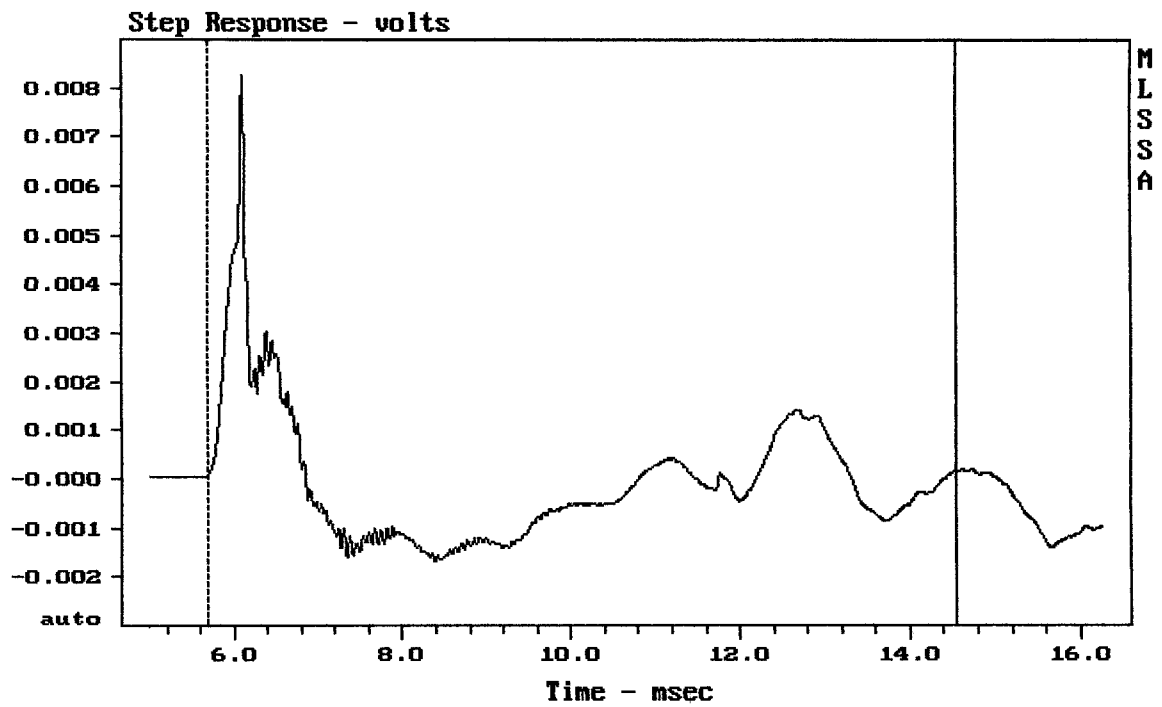

mean: -7.347e-005, rms: 0.001343, std: 0.001341, max: 0.008273, min: -0.001662


RCF ART 500

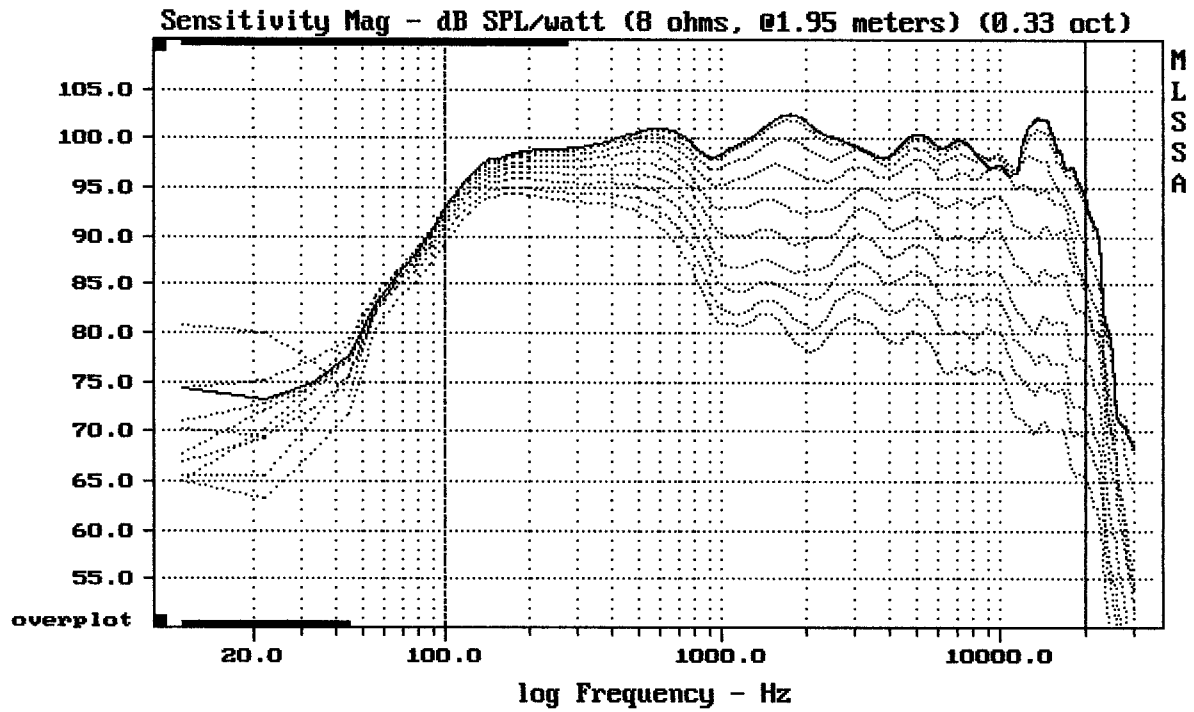

Overlay Compare: dev= +21/-7.9, std= 5.6, avg= -24


RCF ART 500

MLSSA: Frequency Domain

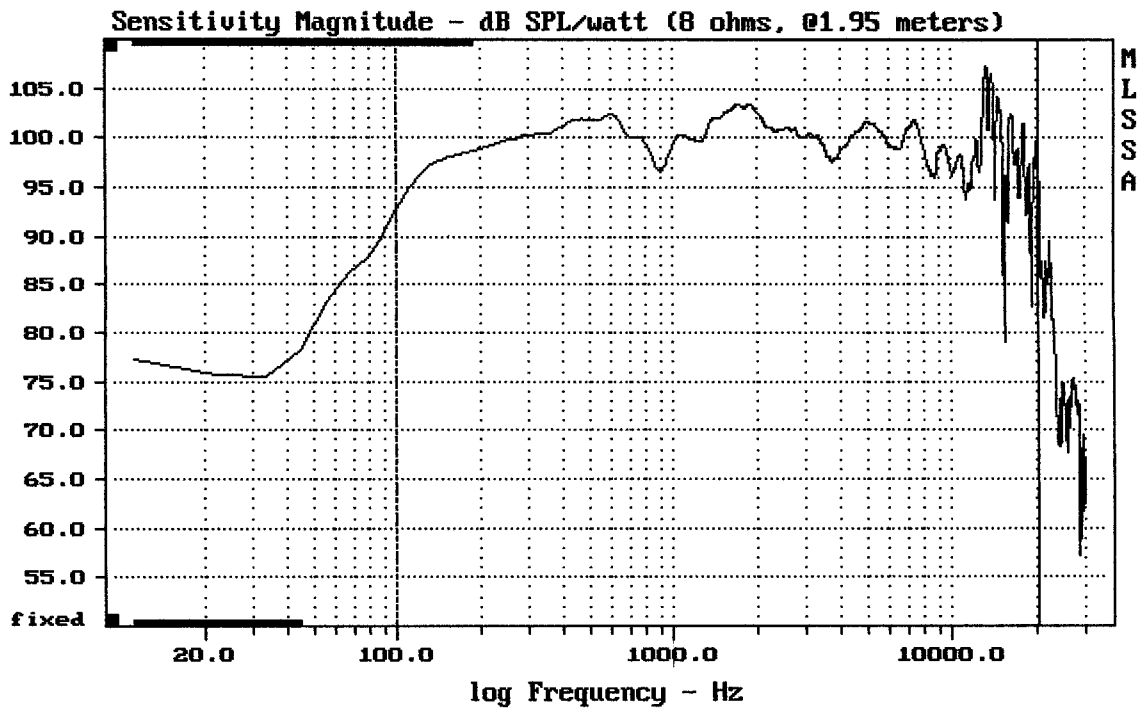

Level (100:20500 Hz) = 100.20 dB SPL/watt (8 ohms, @1.95 meters)


RCF ART 500

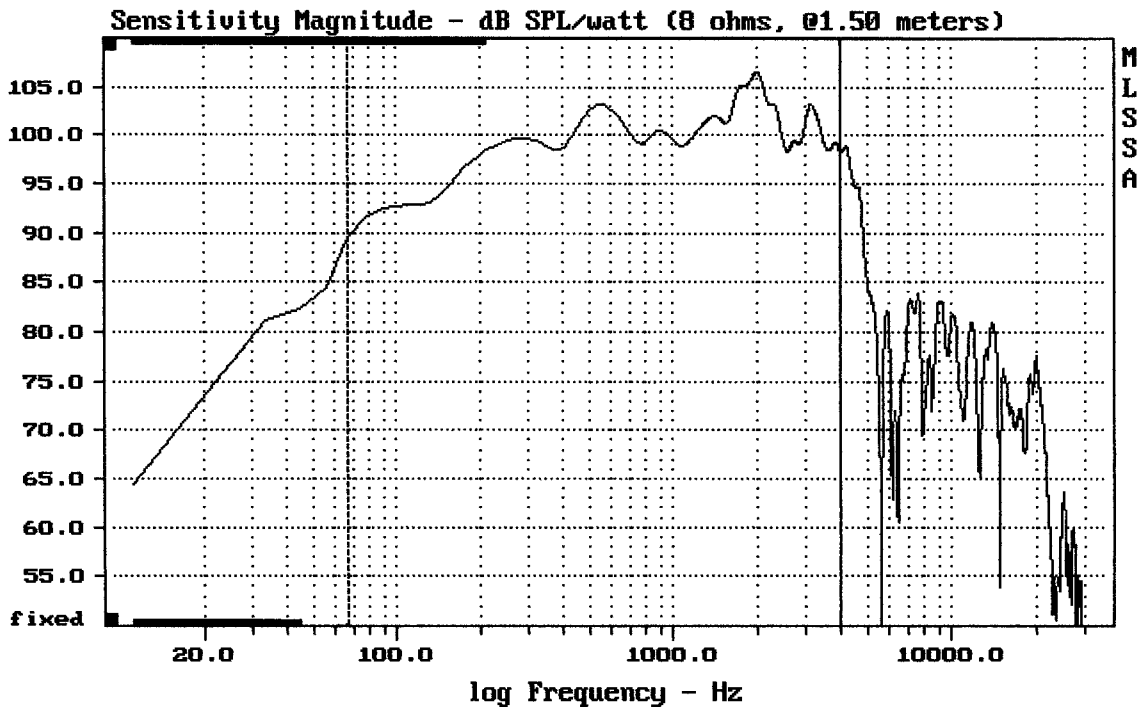

Level (67:4006 Hz) = 100.17 dB SPL/watt (8 ohms, @1.50 meters)

15" FROM RCF ART 500

MLSSA: Frequency Domain

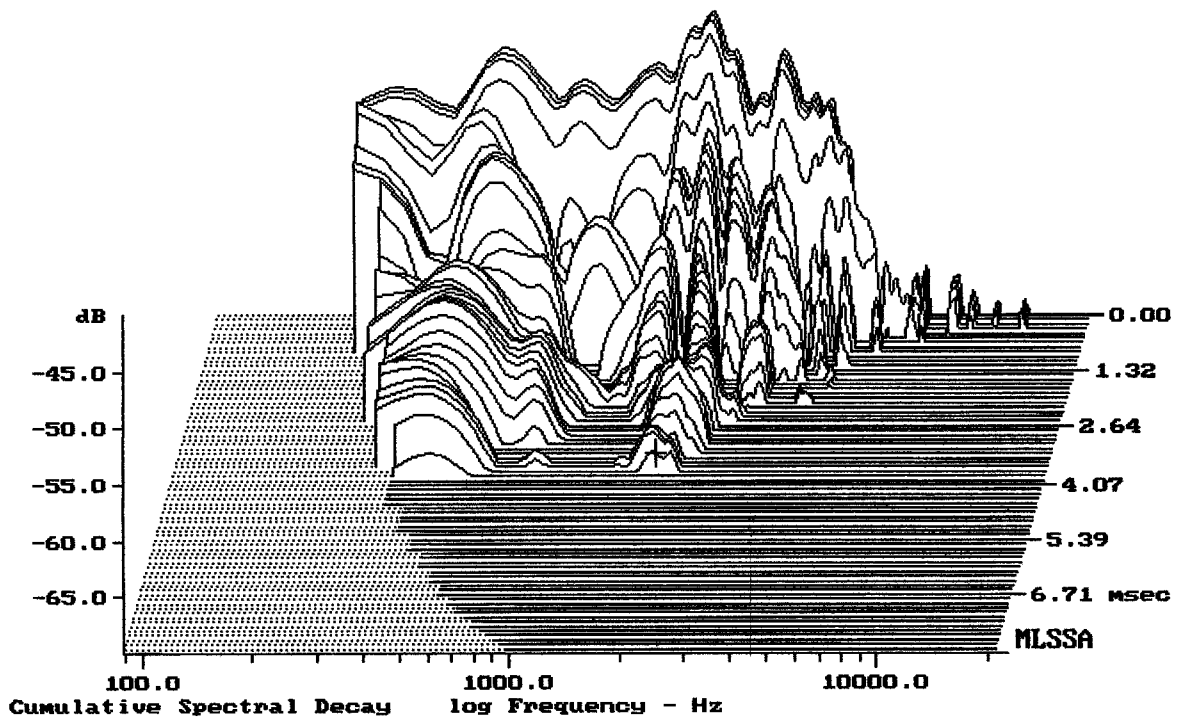

-68.29 dB, 1820 Hz (41), 3.740 msec (35)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.79	Ohms
2	Fs	39.67	Hz
3	Re	5.63	Ohms[dc]
4	Res	99.78	Ohms
5	Qms	4.66	
6	Qes	0.26	
7	Qts	0.25	
8	L1	0.50	mH
9	L2	1.11	mH
10	R2	6.07	Ohms
11	RMSE-load	0.56	Ohms
12	Vas(Sd)	209.71	liters
13	Mms	78.85	grams
14	Cms	204	$\mu\text{M}/\text{Newton}$
15	Bl	20.51	Tesla-M
16	SPLref(Sd)	98.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.8% (-20% to -50% is recommended).


15" FROM RCF ART 500

MLSSA: Parameters

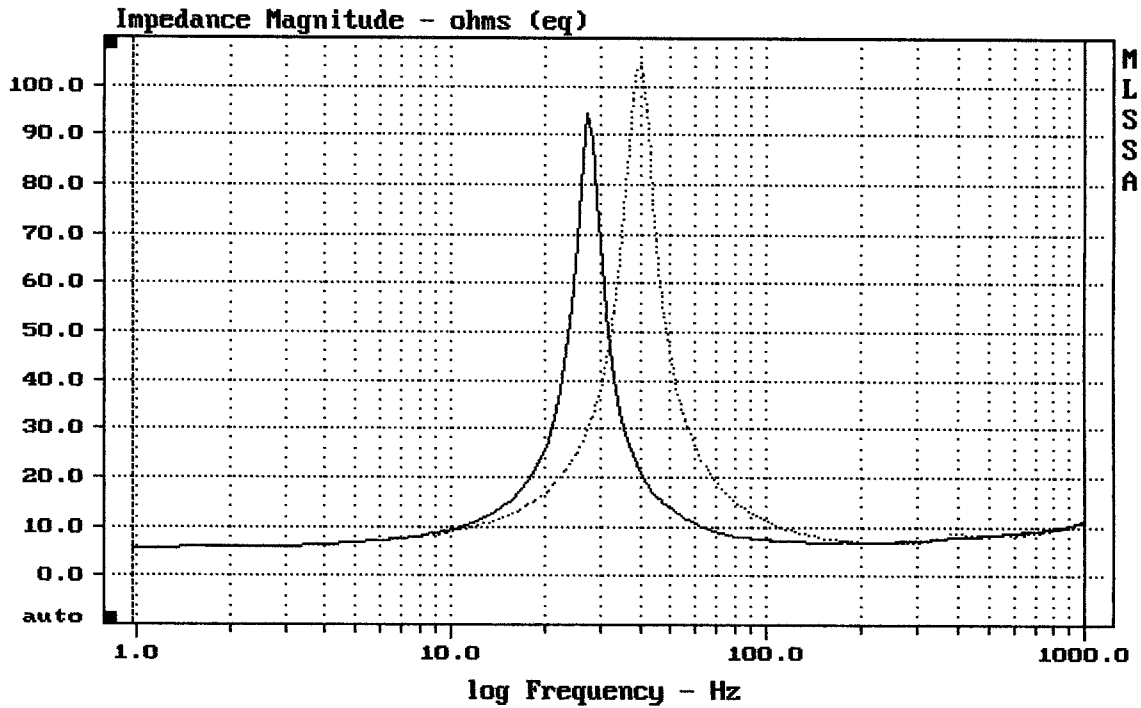

 mean: 10.6, rms: 14.5, std: 9.896, max: 105, min: 5.758


MLSSA: Frequency Domain

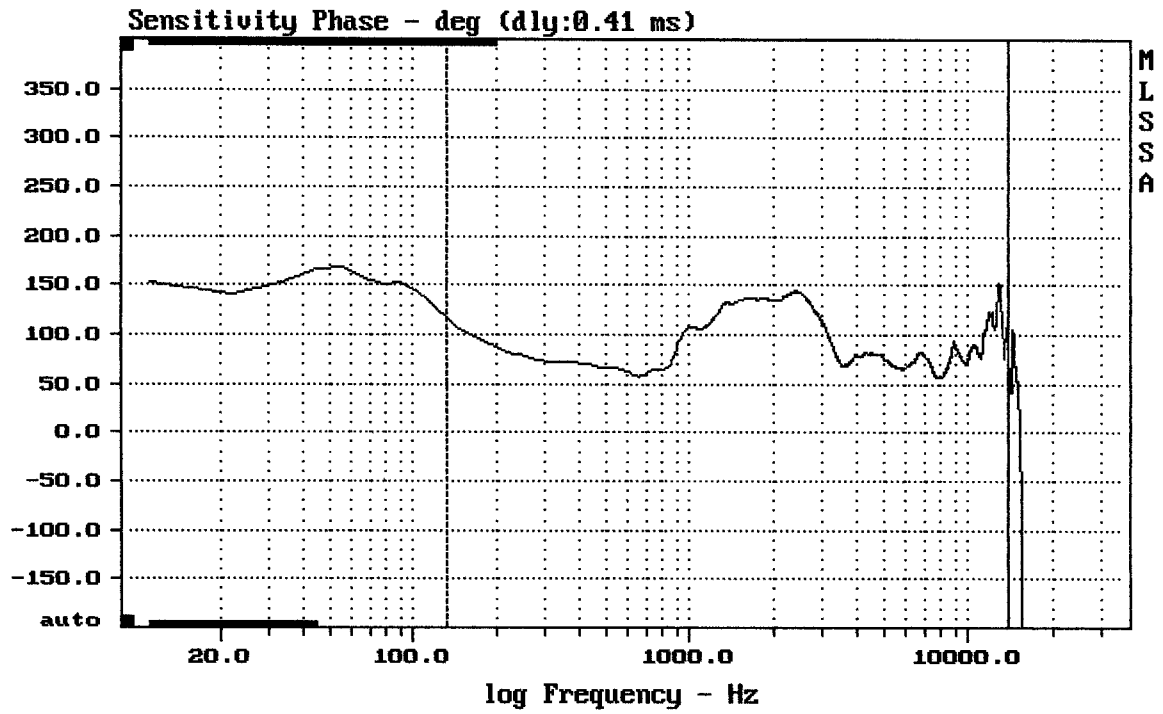

mean: 91.2, rms: 94.51, std: 24.81, max: 151.7, min: 56.48

RCF ART 500

MLSSA: Frequency Domain

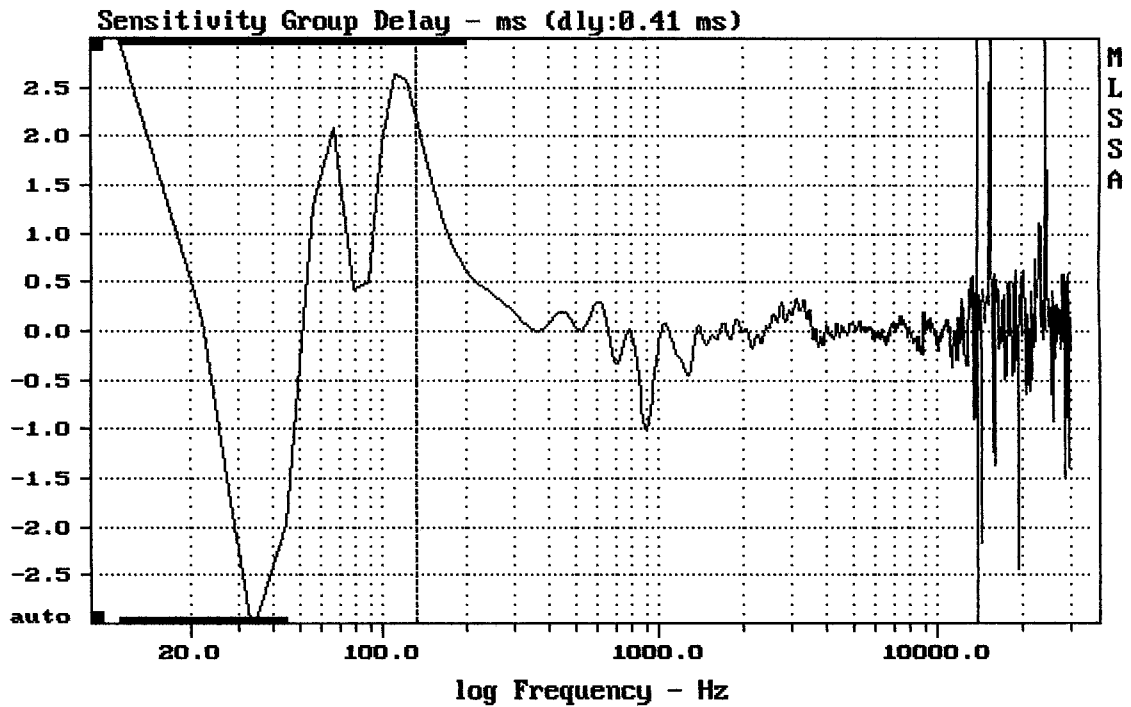

mean: 0.009762, rms: 0.2156, std: 0.2154, max: 2.201, min: -1.017

RCF ART 500