


Level (55:2808 Hz) = 84.38 dB SPL/watt (4 ohms, @1.00 meters)

10SW11A

MLSSA: Frequency Domain

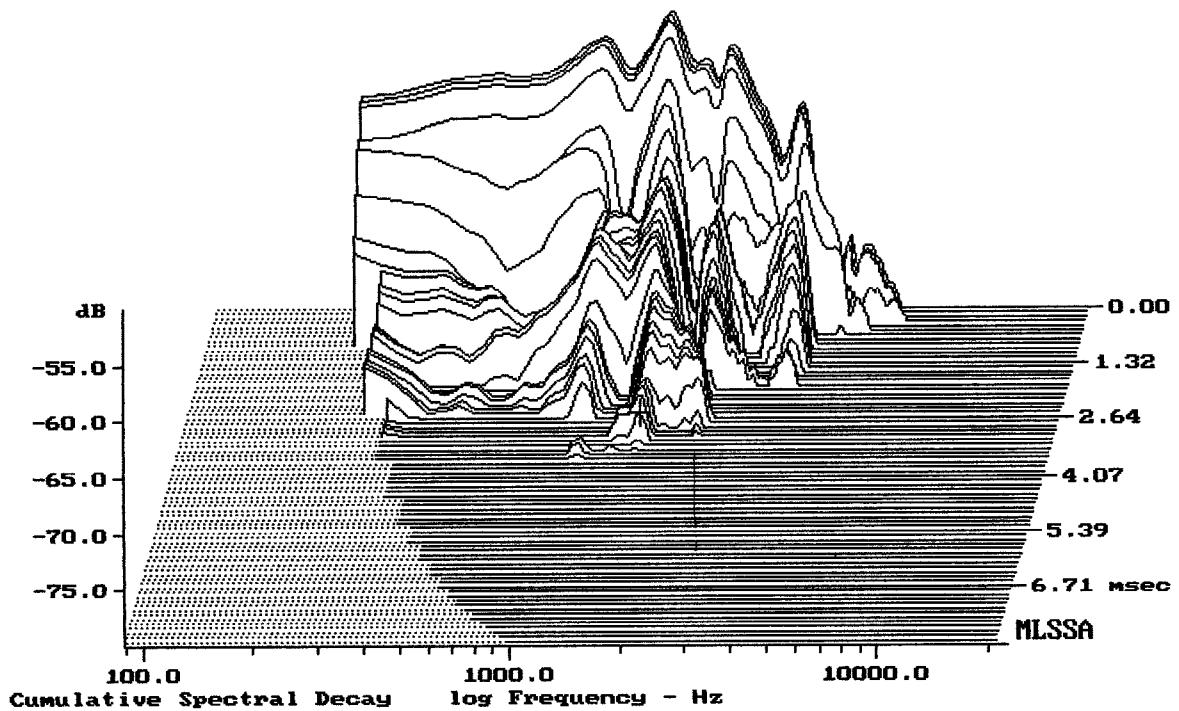

-77.53 dB, 1598 Hz (36), 3.190 msec (30)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.32	Ohms
2	Fs	43.44	Hz
3	Re	3.46	Ohms[dc]
4	Res	32.05	Ohms
5	Qms	13.23	
6	Qes	1.43	
7	Qts	1.29	
8	L1	0.49	mH
9	L2	0.77	mH
10	R2	3.88	Ohms
11	RMSE-load	0.39	Ohms
12	Vas(Sd)	43.30	liters
13	Mms	52.24	grams
14	Cms	257	$\mu\text{M}/\text{Newton}$
15	B1	5.88	Tesla-M
16	SPLref(Sd)	85.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (60.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.6% (-20% to -50% is recommended).

10SW11A

MLSSA: Parameters

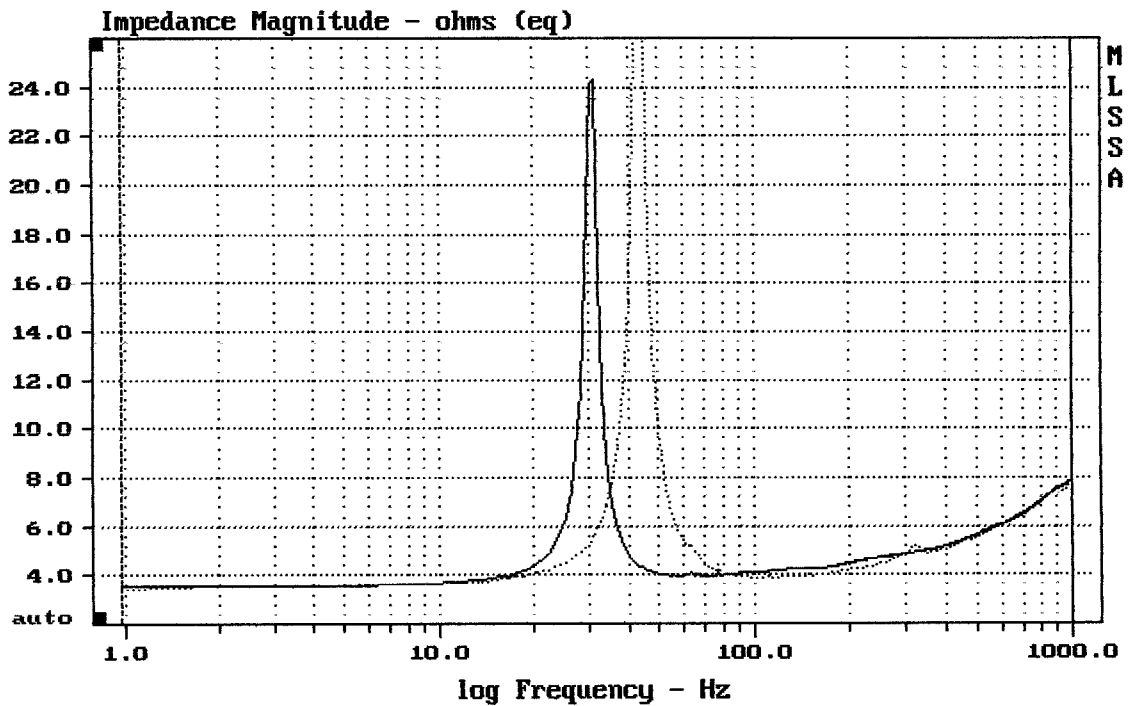

mean: 5.904, rms: 6.288, std: 2.165, max: 34.74, min: 3.413

MLSSA: Frequency Domain