


Level (55:2308 Hz) = 84.15 dB SPL/watt (8 ohms, @1.00 meters)

10SW8A DUC 4+4ohm

MLSSA: Frequency Domain

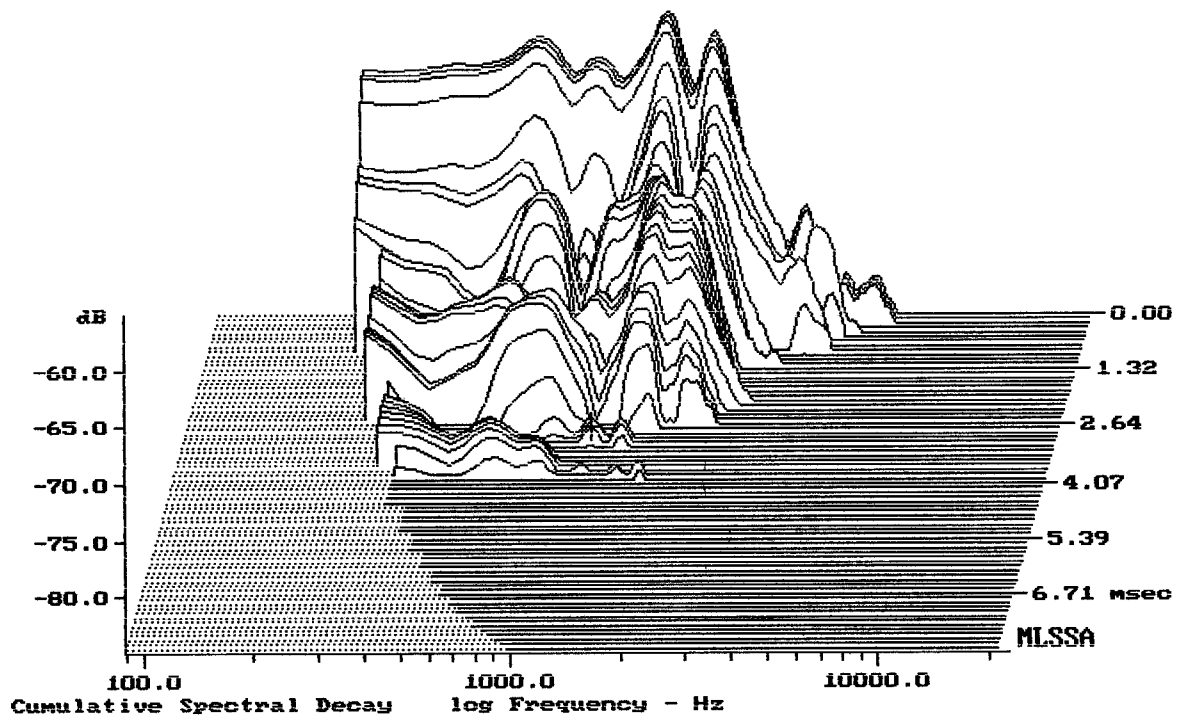

-83.66 dB, 1154 Hz (26), 3.080 msec (29)

Line	Parameter	Value	Units
1	RMSE-free	1.02	Ohms
2	Fs	36.14	Hz
3	Re	7.01	Ohms[dc]
4	Res	114.37	Ohms
5	Qms	11.99	
6	Qes	0.74	
7	Qts	0.69	
8	L1	2.20	mH
9	L2	2.70	mH
10	R2	11.71	Ohms
11	RMSE-load	1.08	Ohms
12	Vas(Sd)	61.32	liters
13	Mms	53.29	grams
14	Cms	364	$\mu\text{M}/\text{Newton}$
15	Bl	10.74	Tesla-M
16	SPLref(Sd)	87.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (60.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.5% (-20% to -50% is recommended).

10SW8A DVC 4+4ohm

MLSSA: Parameters

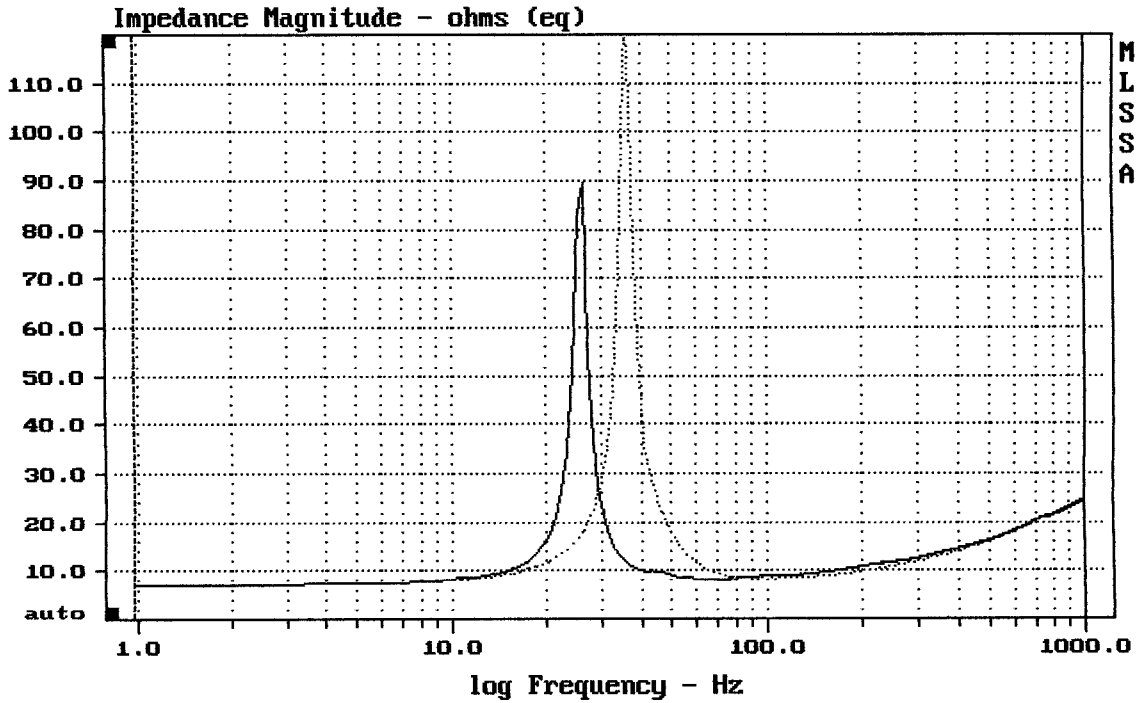

mean: 16.9, rms: 18.66, std: 7.922, max: 123.5, min: 7.051

MLSSA: Frequency Domain