


Level (55:200 Hz) = 82.92 dB SPL/watt (8 ohms, @1.00 meters)

10SW11A DUC 4+4ohm

MLSSA: Frequency Domain

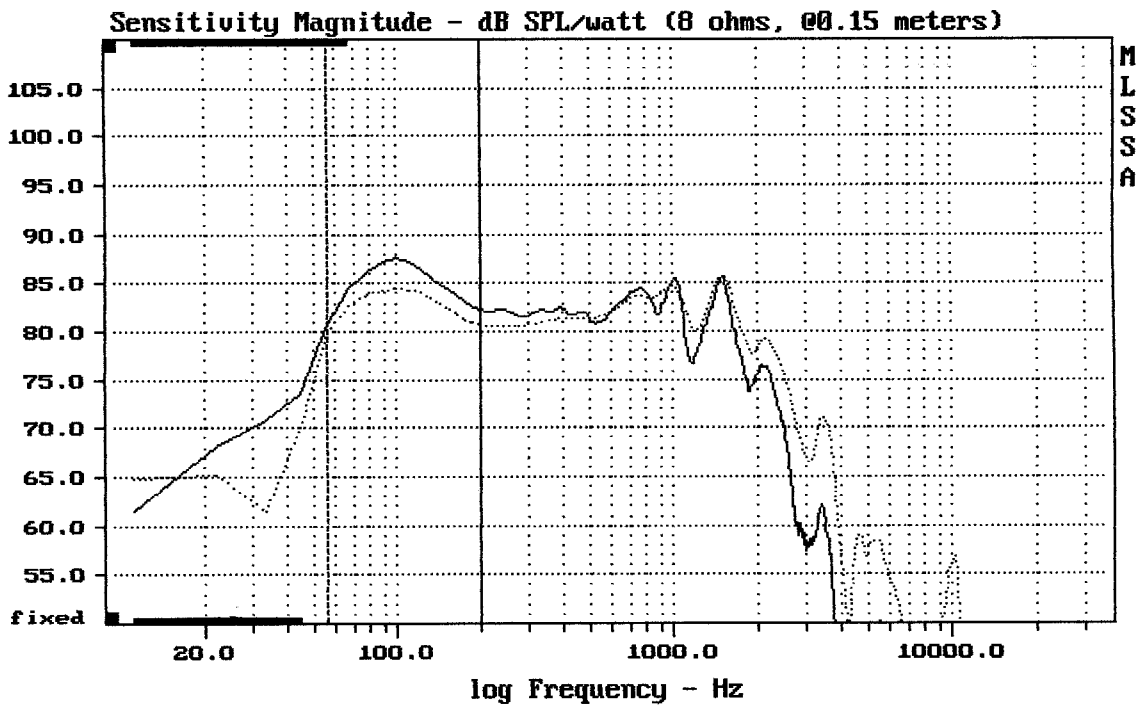

Overlay Compare: dev= +0.97/-1, std= 0.55, avg= 2.1

DTTO NEARFIELD

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.25	Ohms
2	Fs	39.84	Hz
3	Re	6.99	Ohms[dc]
4	Res	90.34	Ohms
5	Qms	14.22	
6	Qes	1.10	
7	Qts	1.02	
8	L1	2.08	mH
9	L2	3.12	mH
10	R2	13.40	Ohms
11	RMSE-load	1.40	Ohms
12	Vas(Sd)	44.68	liters
13	Mms	60.18	grams
14	Cms	265	$\mu\text{M}/\text{Newton}$
15	B1	9.78	Tesla-M
16	SPLref(Sd)	85.9	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (80.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.6% (-20% to -50% is recommended).

10SW11A DVC 4+4ohm

MLSSA: Parameters

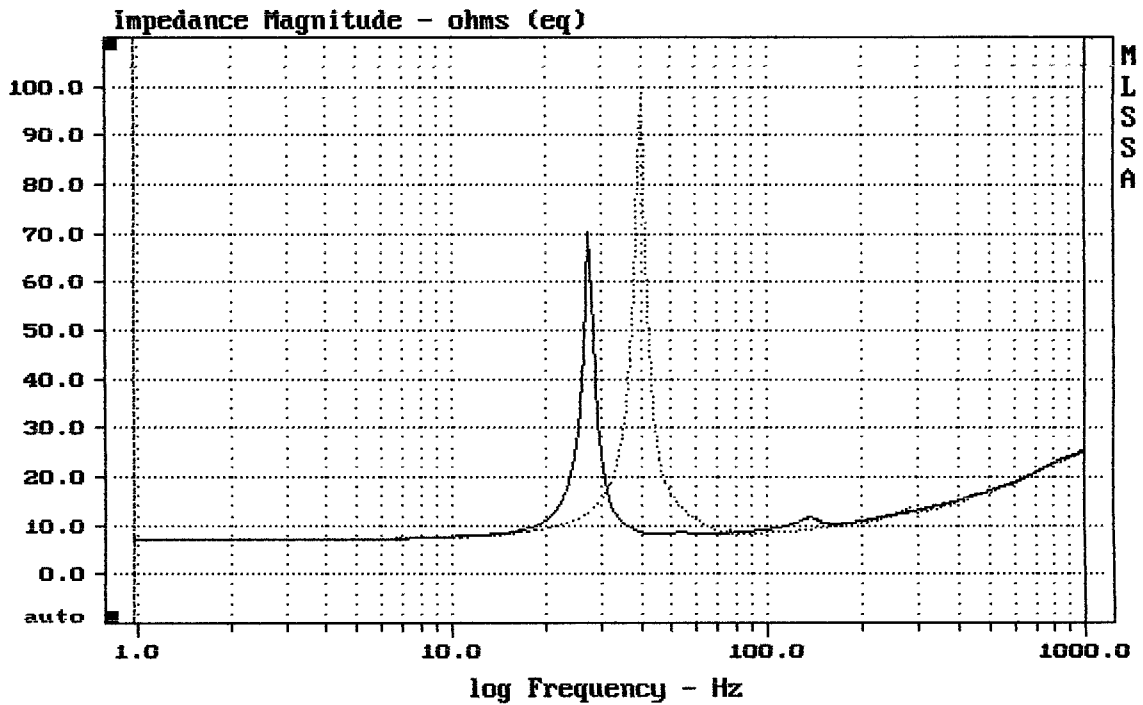

mean: 17.37, rms: 18.67, std: 6.856, max: 98.63, min: 6.973

MLSSA: Frequency Domain