


Level (44:200 Hz) = 100.76 dB SPL/watt (4 ohms, @1.50 meters)


RCF 4PRO 8001-AS

MLSSA: Frequency Domain

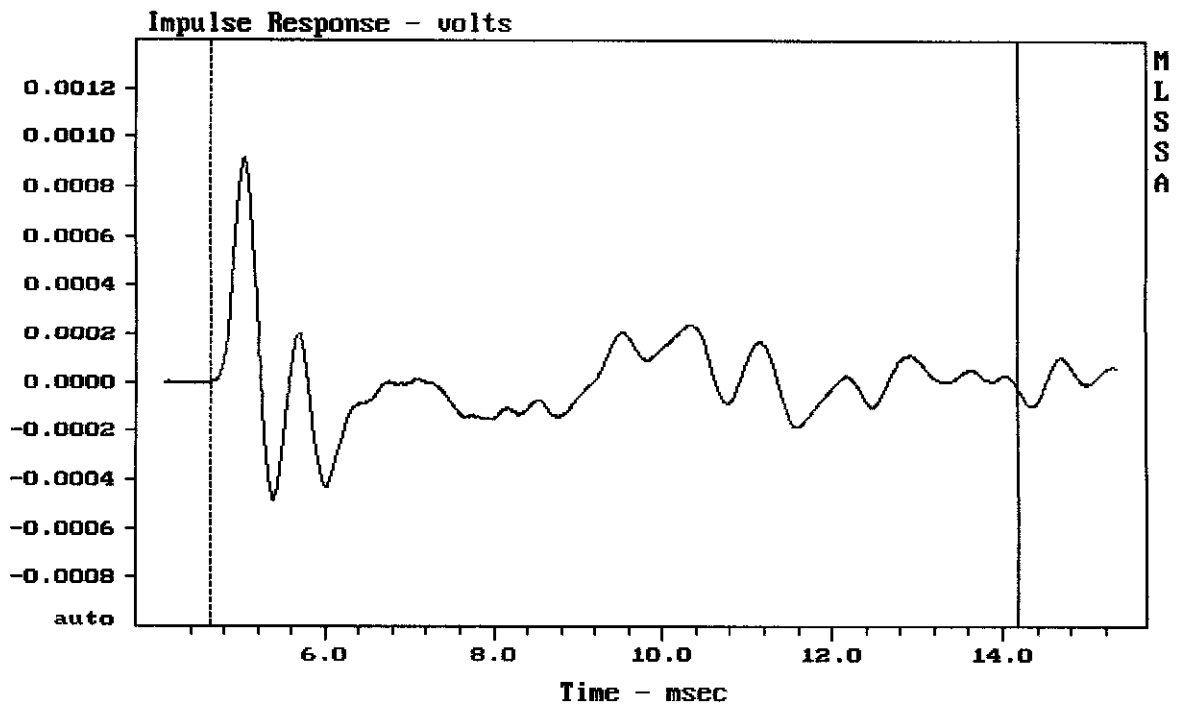

mean: 1.505e-006, rms: 0.0001886, std: 0.0001886, max: 0.0009168, min: -0.0004


RCF 4PRO 8001-AS

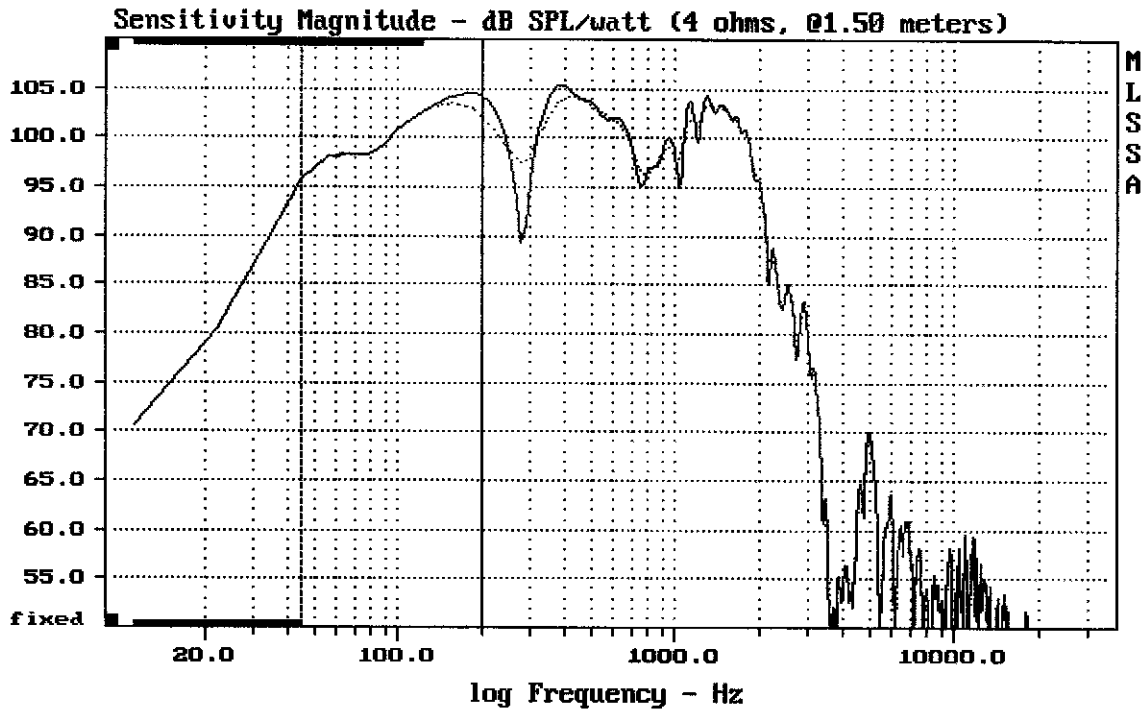

CURSOR: $dy = -2.14568$ $x = 199.7514$ (18)


RCF 4PRO 8001-AS

MLSSA: Frequency Domain

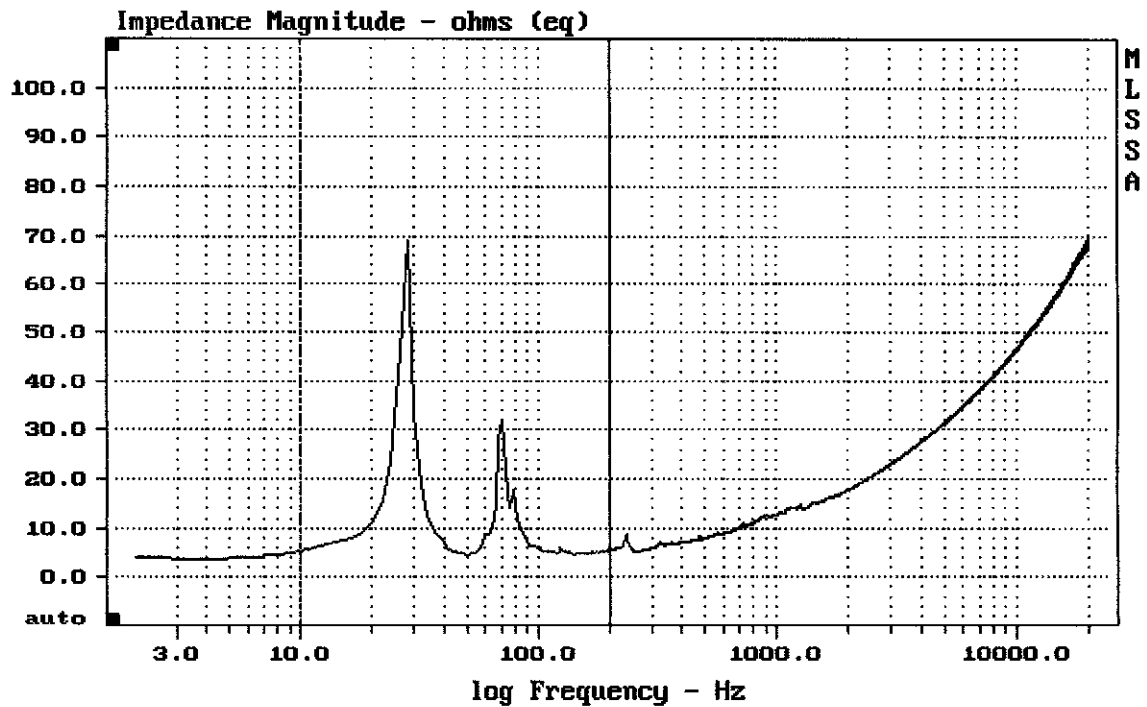

mean: 8.955, rms: 12.94, std: 9.335, max: 69.06, min: 4.387


RCF 4PRO 8001-AS

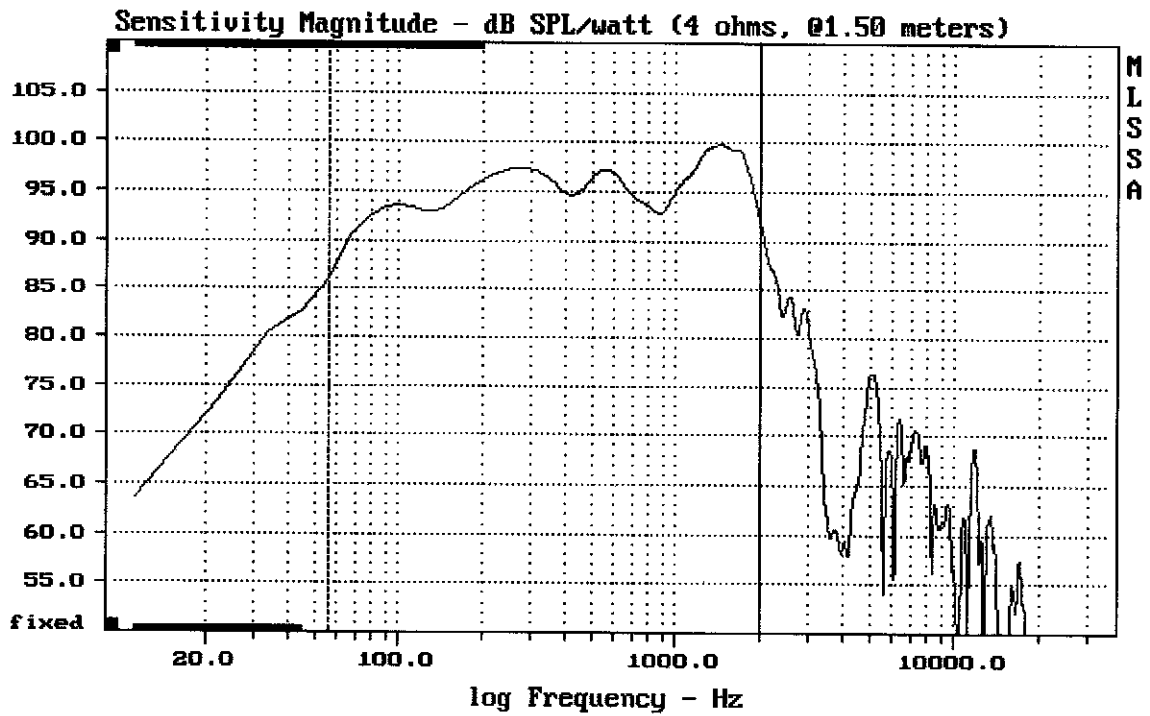

Level (55:1998 Hz) = 95.68 dB SPL/watt (4 ohms, @1.50 meters)

18" RCF FROM 4PRO 8001-AS

MLSSA: Frequency Domain

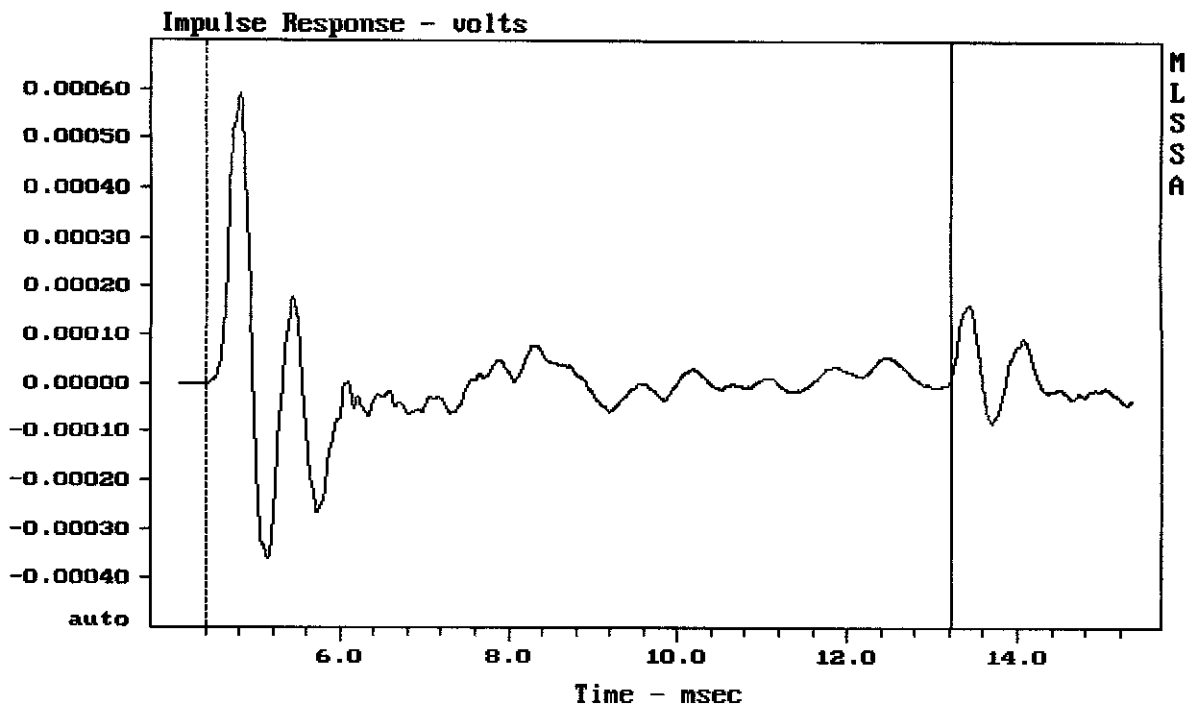

mean: -1.513e-007, rms: 0.0001123, std: 0.0001123, max: 0.0005896, min: -0.000

18" RCF FROM 4PRO 8001-AS

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.59	Ohms
2	Fs	38.58	Hz
3	Re	3.35	Ohms[dc]
4	Res	136.03	Ohms
5	Qms	13.34	
6	Qes	0.33	
7	Qts	0.32	
8	L1	0.83	mH
9	L2	1.72	mH
10	R2	8.17	Ohms
11	RMSE-load	0.74	Ohms
12	Vas(Sd)	188.86	liters
13	Mms	190.08	grams
14	Cms	90	μ M/Newton
15	Bl	21.68	Tesla-M
16	SPLref(Sd)	97.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (120.00 grams)

Area (Sd): 1225.42 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -22.8% (-20% to -50% is recommended).

18" RCF FROM 4PRO 8001-AS

MLSSA: Parameters

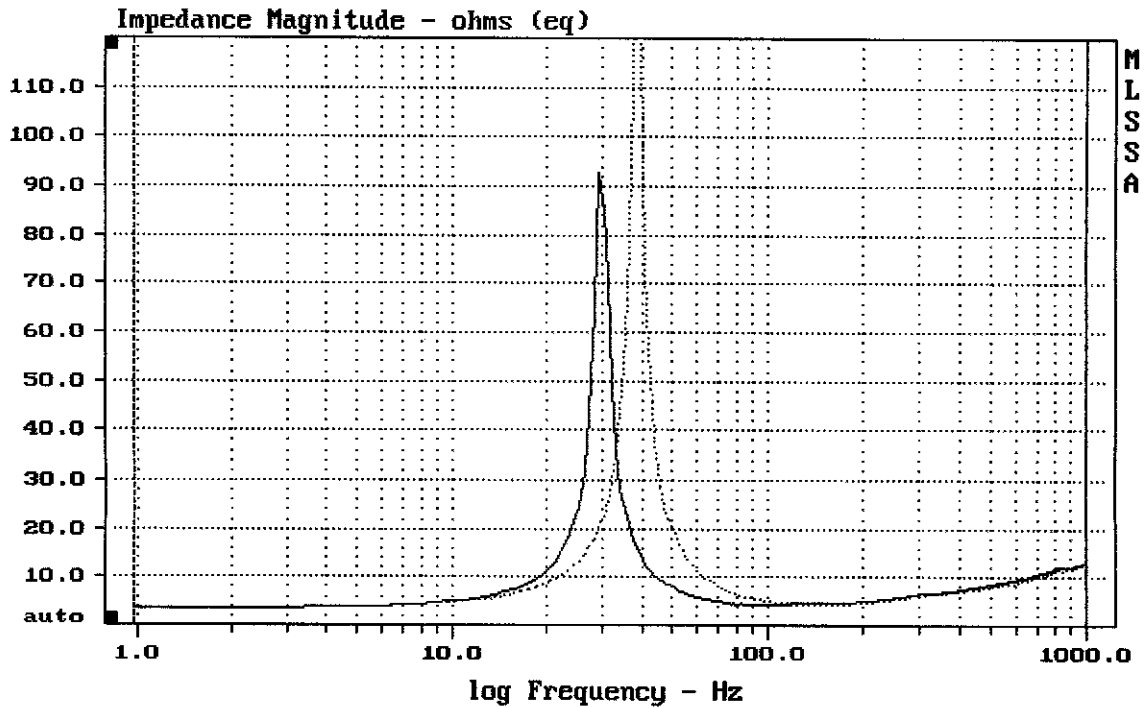

mean: 9.339, rms: 12.55, std: 8.383, max: 136.3, min: 3.399

MLSSA: Frequency Domain