


Level (78:19298 Hz) = 99.30 dB SPL/watt (8 ohms, @1.90 meters)


TAPCO 6925

MLSSA: Frequency Domain

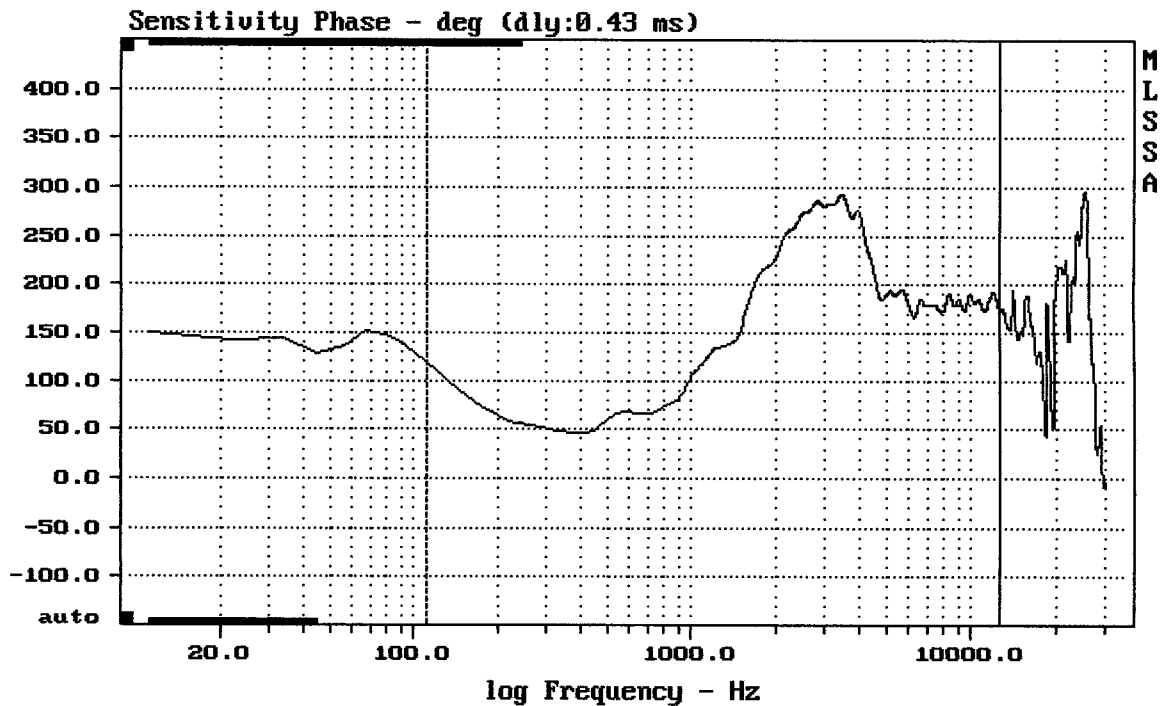

mean: 190.3, rms: 197, std: 50.93, max: 292.2, min: 46.22


TAPCO 6925

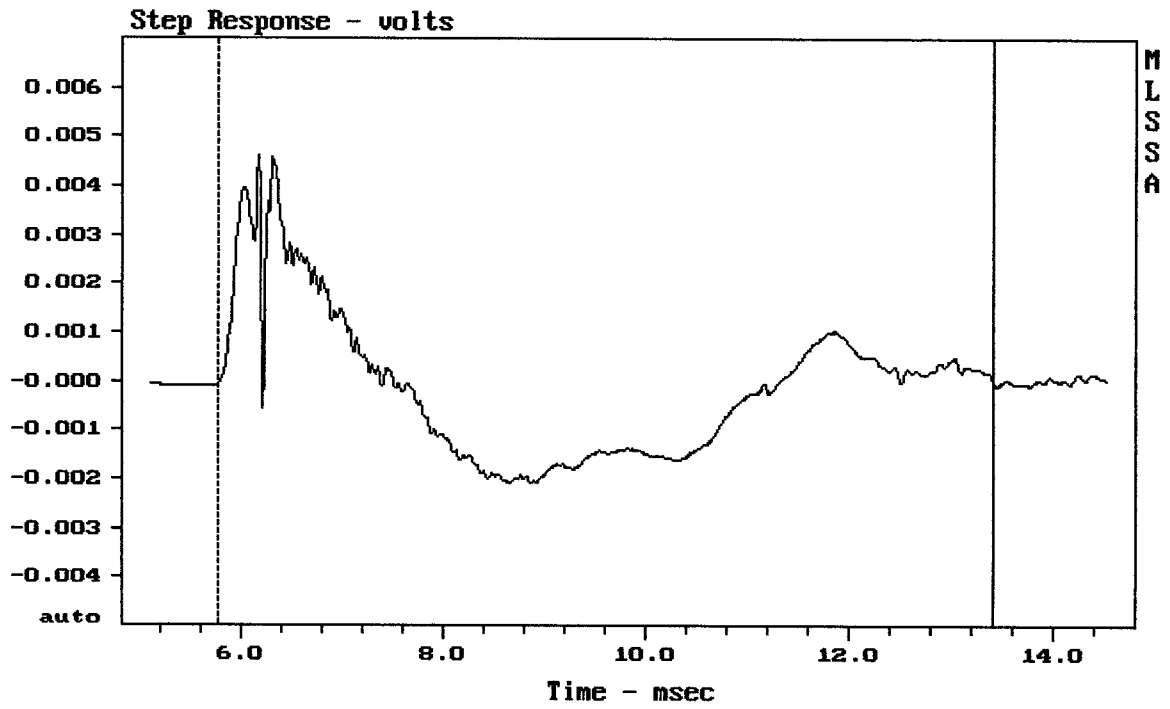


mean: -0.0001125, rms: 0.001495, std: 0.001491, max: 0.004612, min: -0.002093

TAPCO 6925

MLSSA: Time Domain

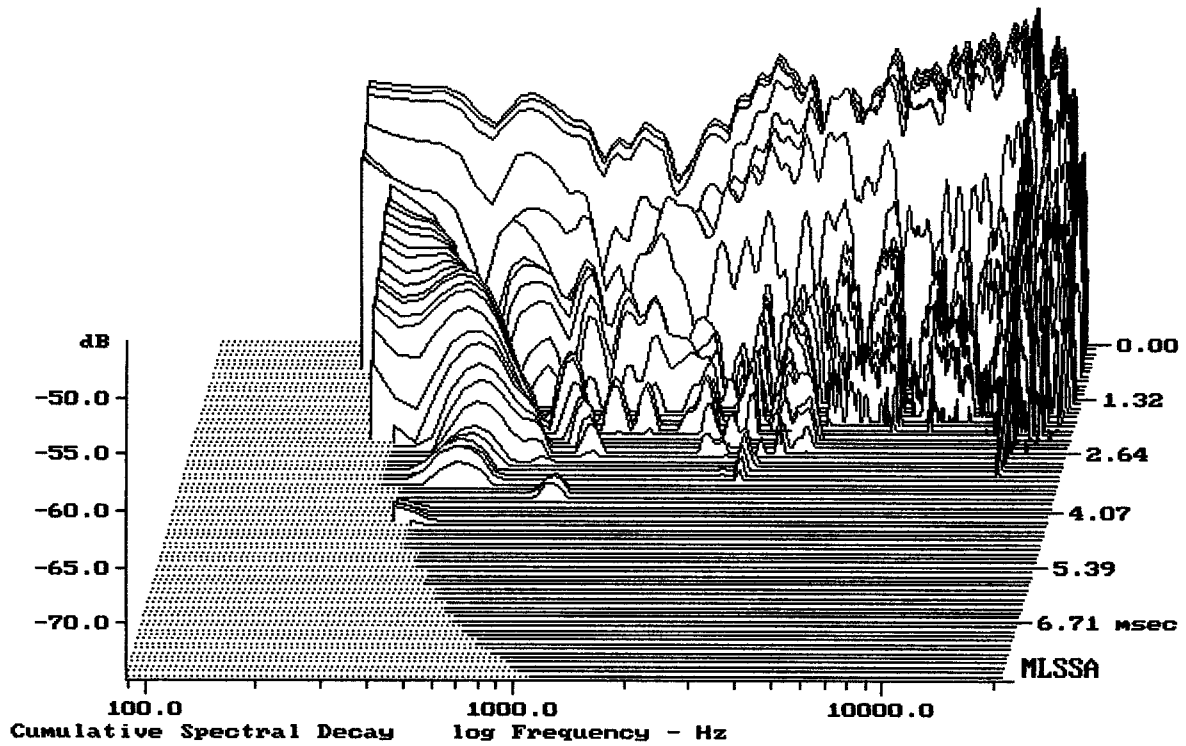


-73.04 dB, 3551 Hz (80), 2.640 msec (25)

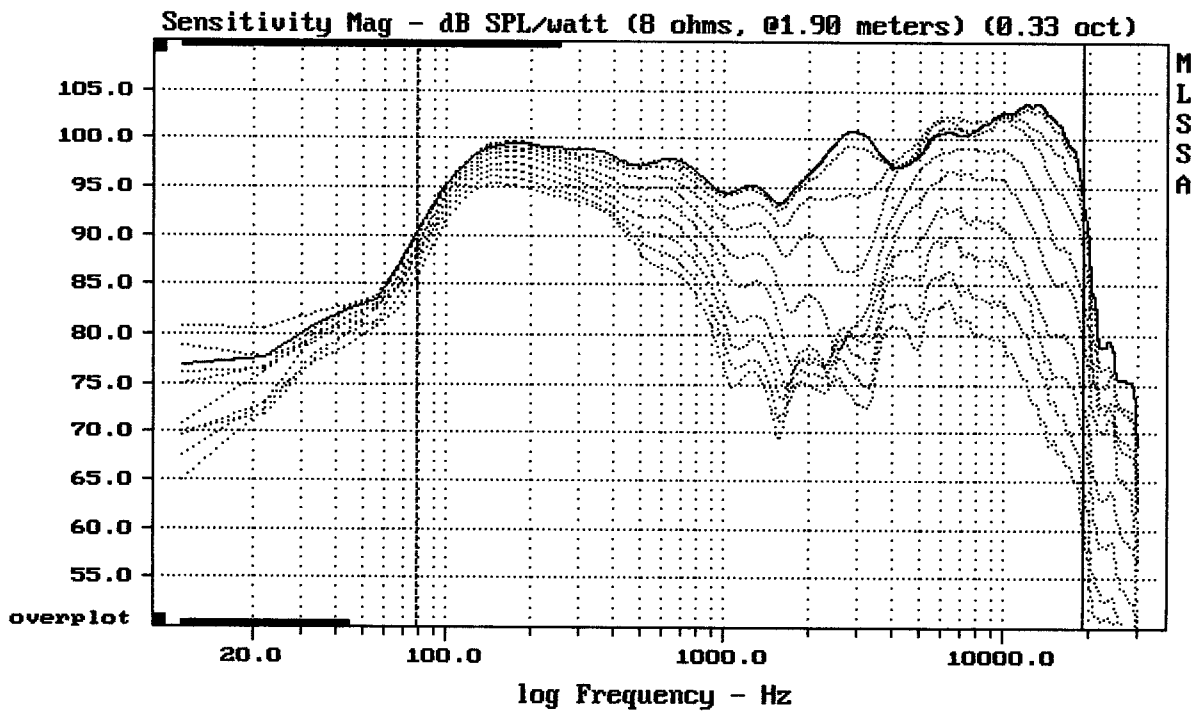

Overlay Compare: dev= +22/-9.1, std= 7, avg= -25


TAPCO 6925

MLSSA: Frequency Domain

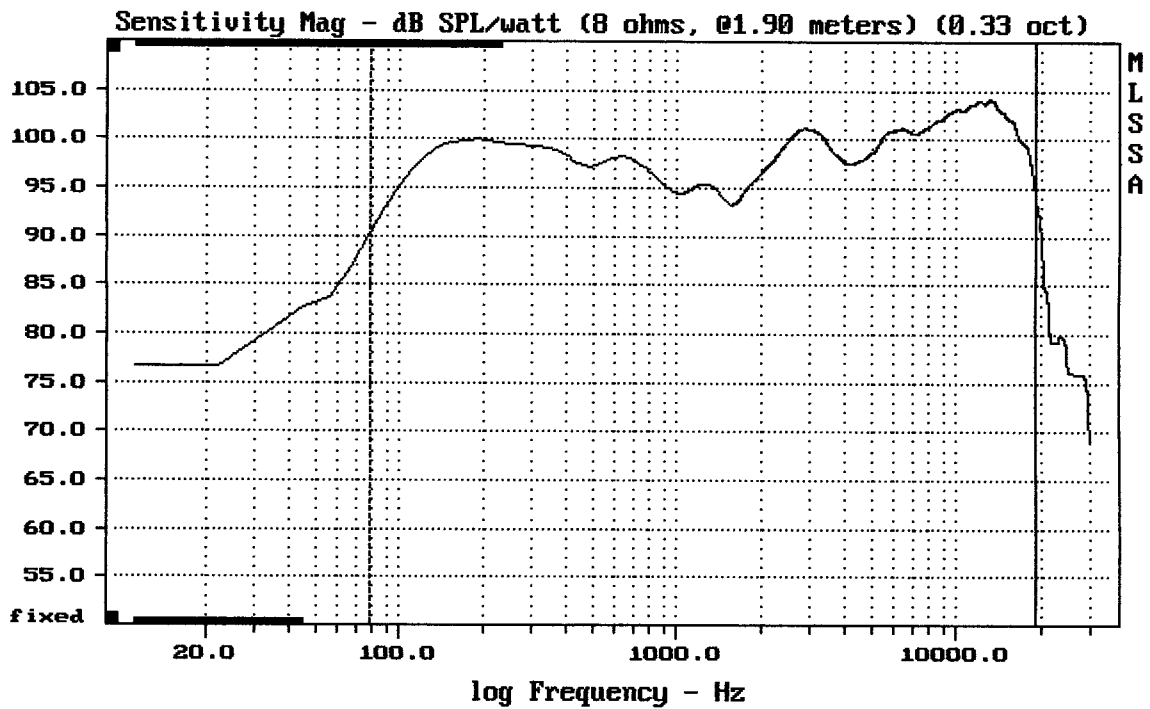

Level (78:19298 Hz) = 99.29 dB SPL/watt (8 ohms, 01.90 meters) (0.33 oct)


TAPCO 6925

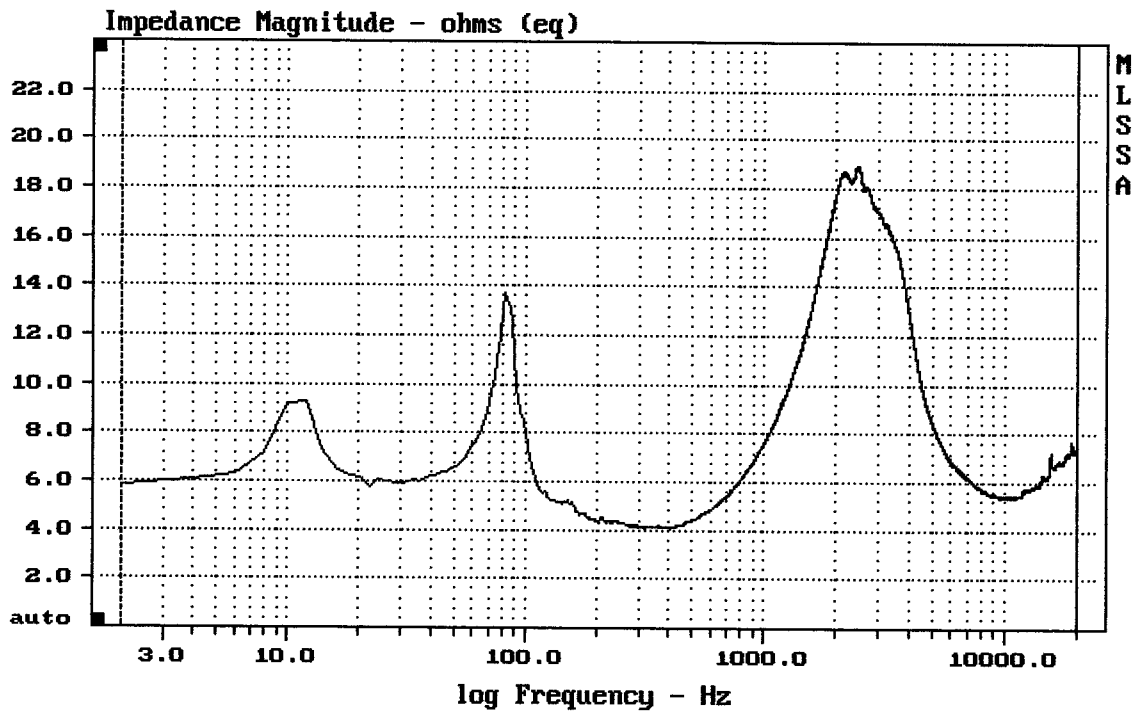


mean: 7.815, rms: 8.589, std: 3.564, max: 18.92, min: 4.074

TAPCO 6925

MLSSA: Frequency Domain

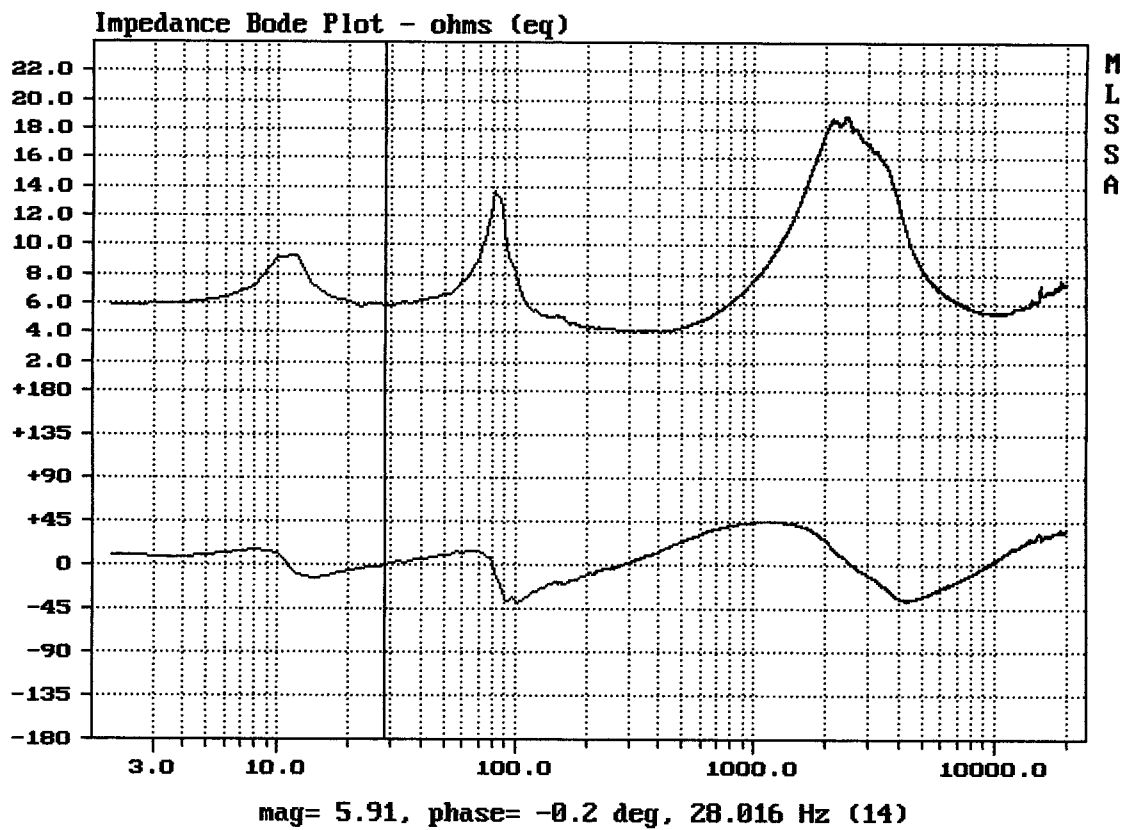


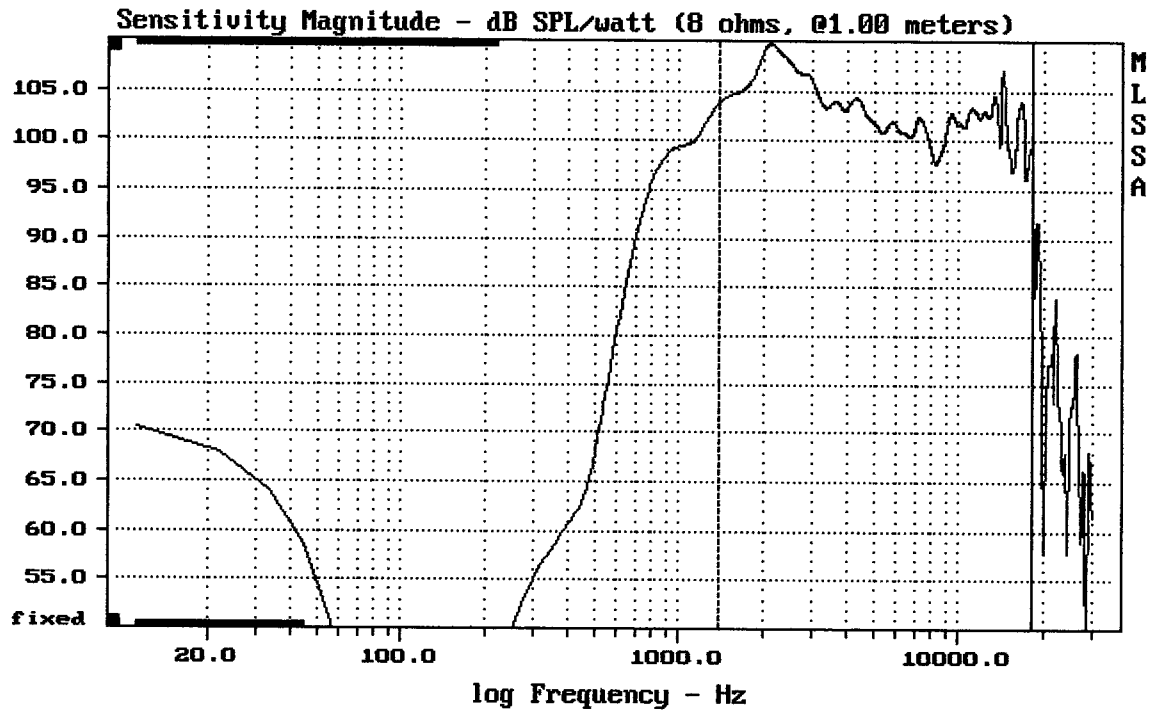


Level (1398:18399 Hz) = 104.39 dB SPL/watt (8 ohms, @1.00 meters)

1" FROM TAPCO 6925

MLSSA: Frequency Domain

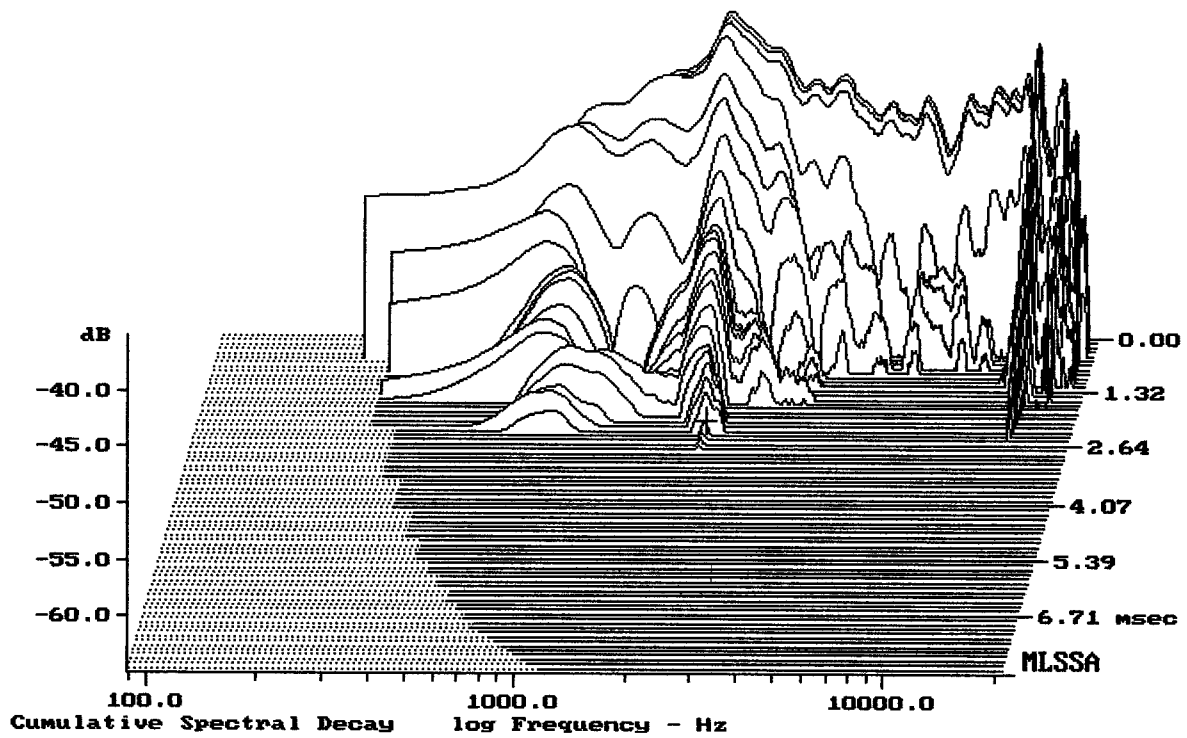


-63.68 dB, 2175 Hz (49), 2.420 msec (23)

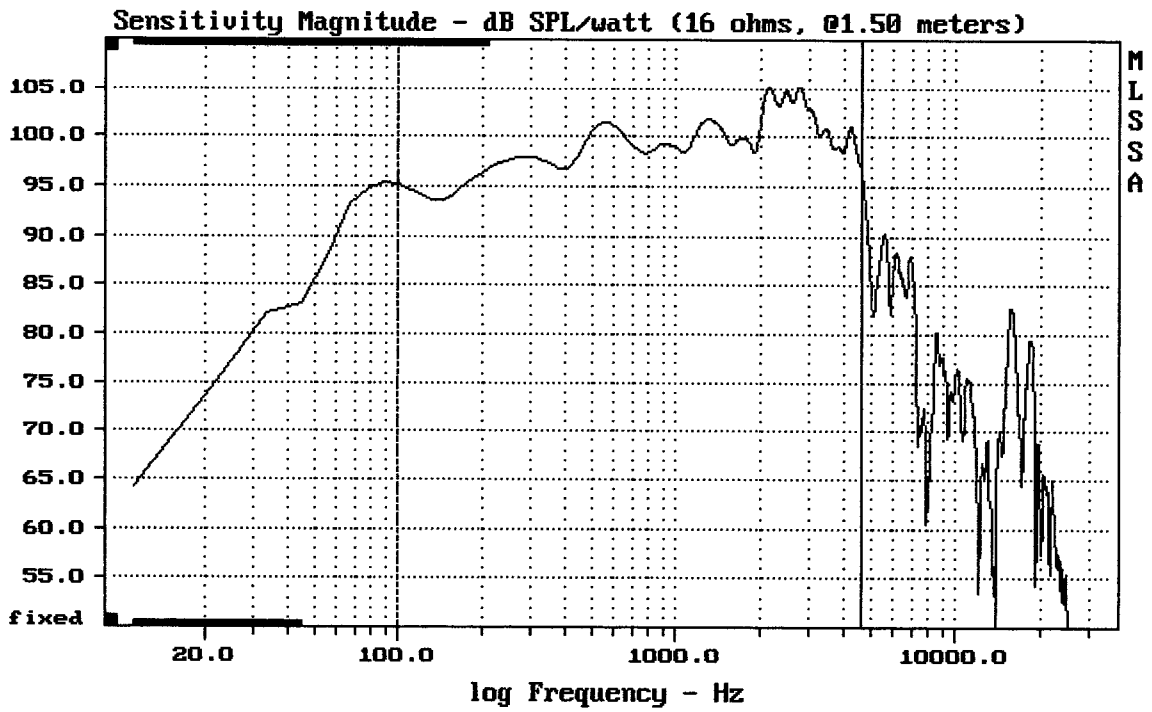

Level (100:4605 Hz) = 99.72 dB SPL/watt (16 ohms, @1.50 meters)

15" FROM TAPCO 6925

MLSSA: Frequency Domain

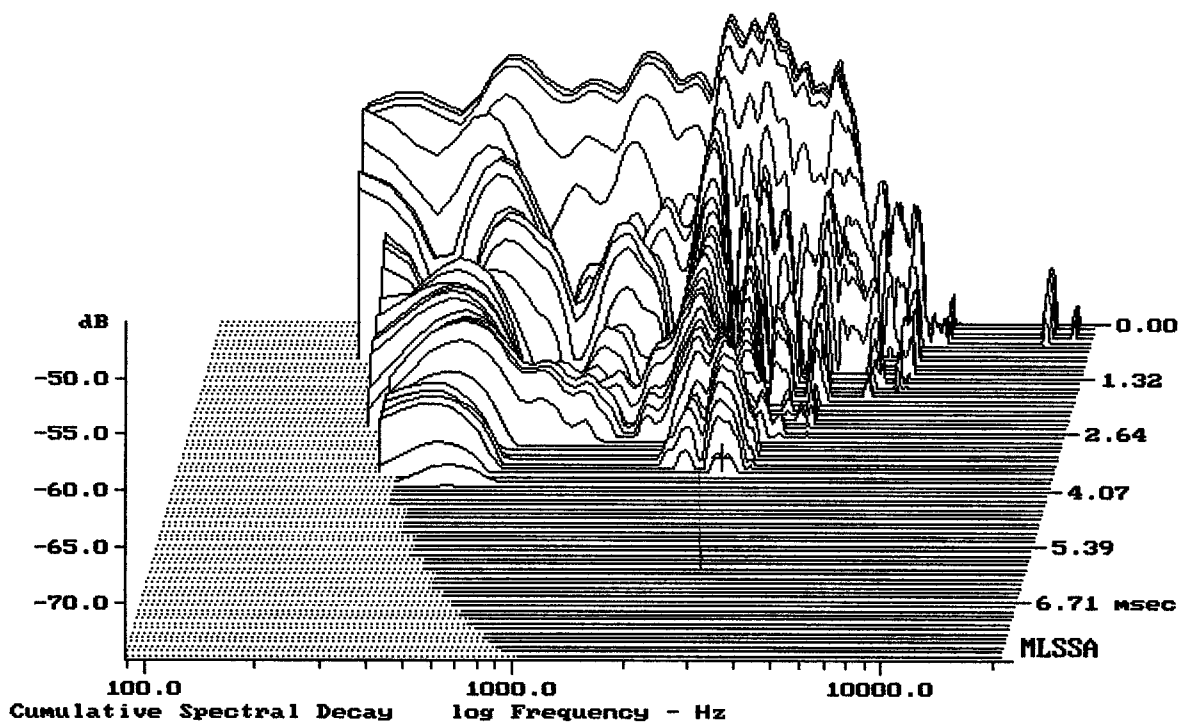

-73.56 dB, 2663 Hz (60), 3.630 msec (34)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.44	Ohms
2	Fs	40.65	Hz
3	Re	10.63	Ohms[dc]
4	Res	64.44	Ohms
5	Qms	5.24	
6	Qes	0.86	
7	Qts	0.74	
8	L1	0.81	mH
9	L2	1.15	mH
10	R2	4.62	Ohms
11	RMSE-load	0.59	Ohms
12	Vas(Sd)	270.75	liters
13	Mms	57.45	grams
14	Cms	267	$\mu\text{M}/\text{Newton}$
15	B1	13.43	Tesla-M
16	SPLref(Sd)	95.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 850.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.3% (-20% to -50% is recommended).


15" FROM TAPCO 6925

MLSSA: Parameters

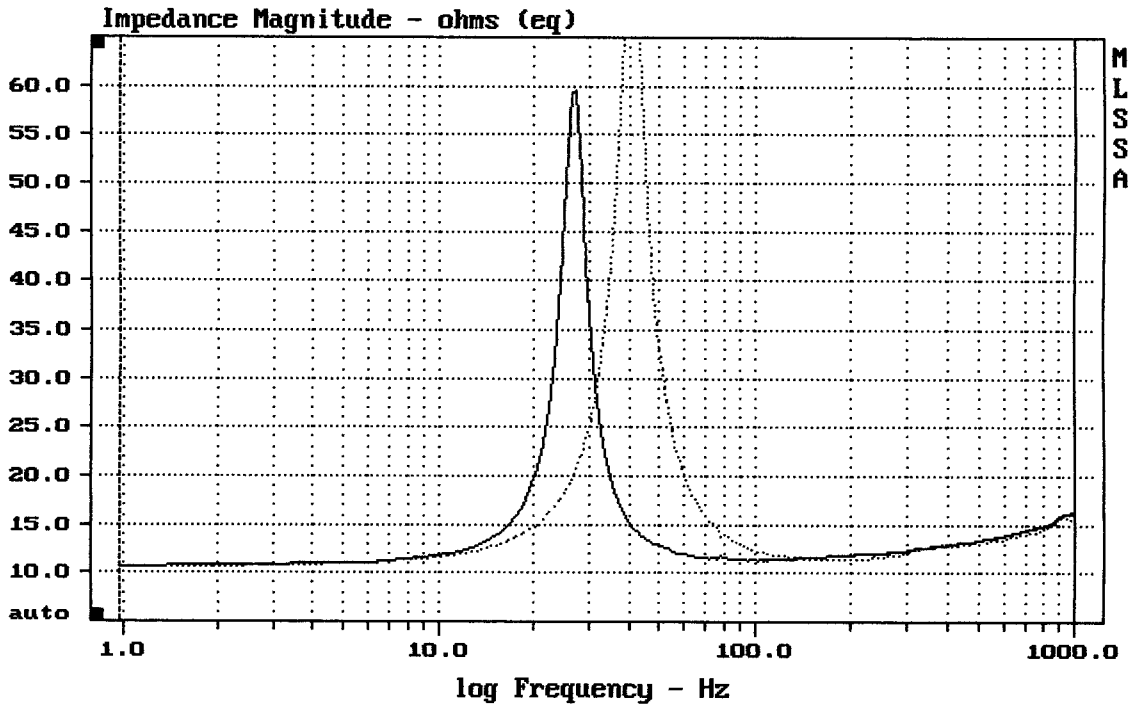

mean: 14.32, rms: 15.44, std: 5.775, max: 75.54, min: 10.67


MLSSA: Frequency Domain

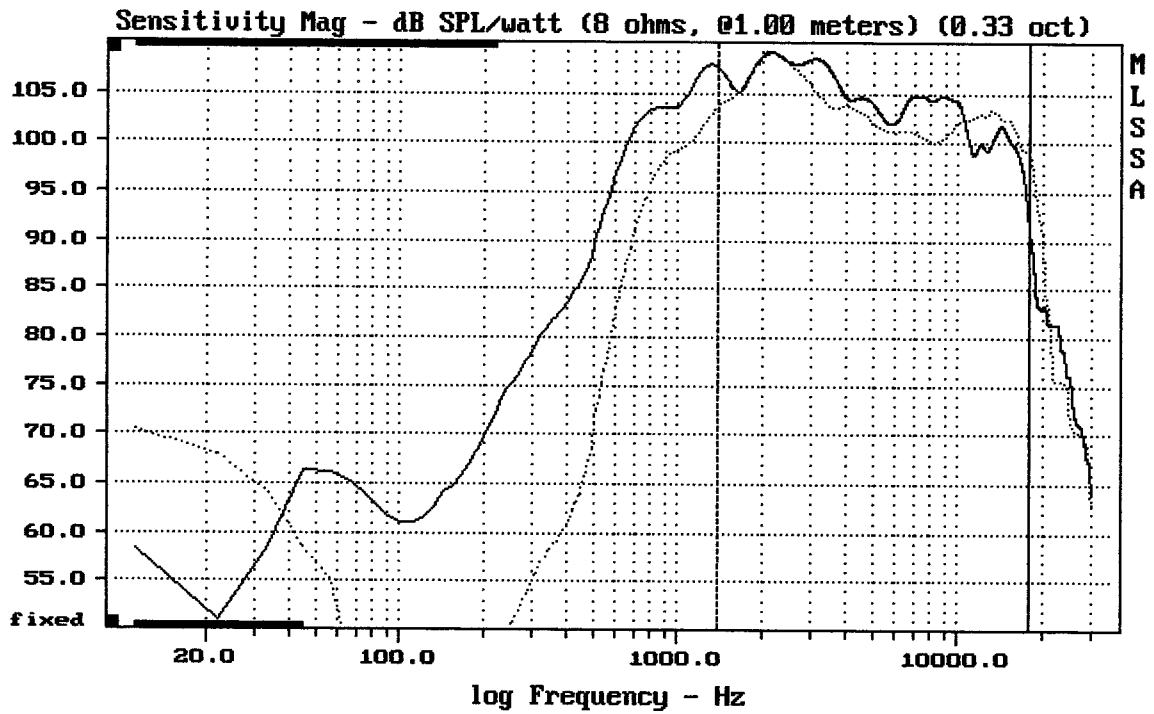

Overlay Compare: dev= +4.3/-7.8, std= 2.8, avg= 0.094


1" FROM TAPCO 6925

MLSSA: Frequency Domain

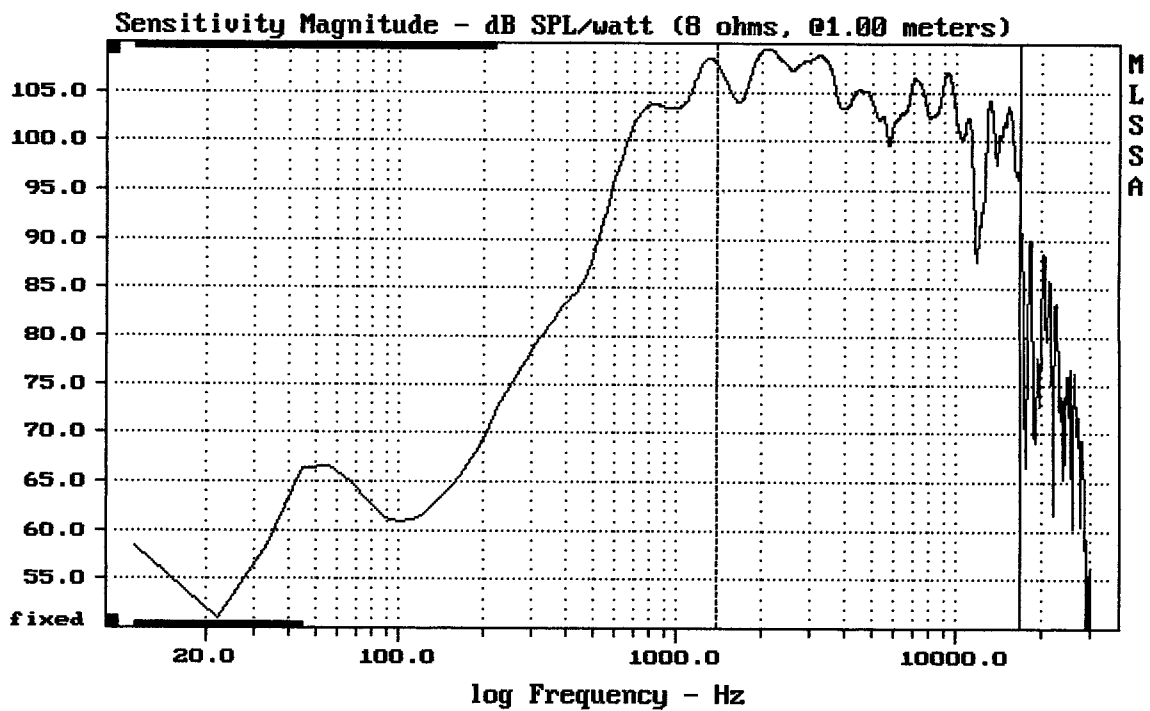

Level (1398:17001 Hz) = 105.53 dB SPL/watt (8 ohms, @1.00 meters)


HORN TAPCO + PSD2002S

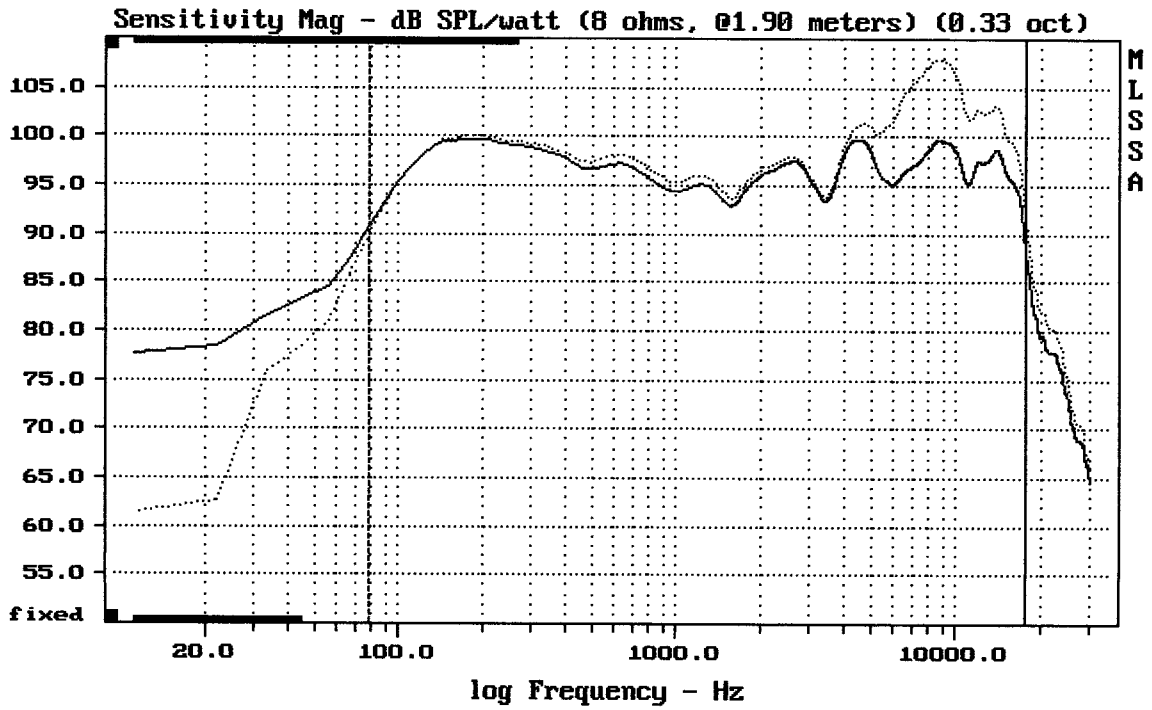


Overlay Compare: dev= +5.1/-4.2, std= 2.8, avg= -4.5


TAPCO 6925 + PSD2002S

MLSSA: Frequency Domain

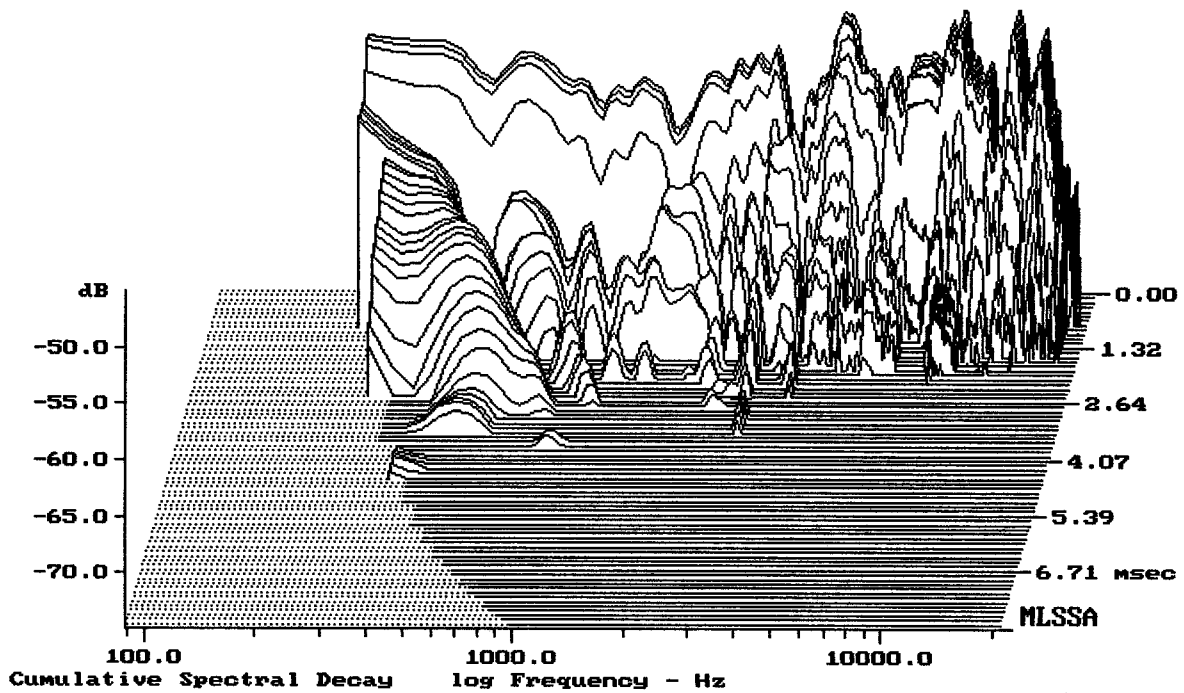


-74.33 dB, 2797 Hz (63), 2.750 msec (26)

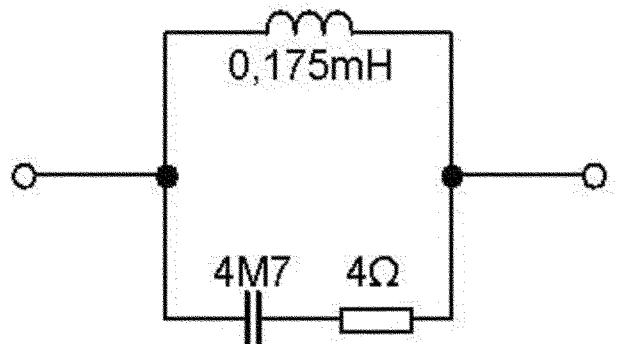

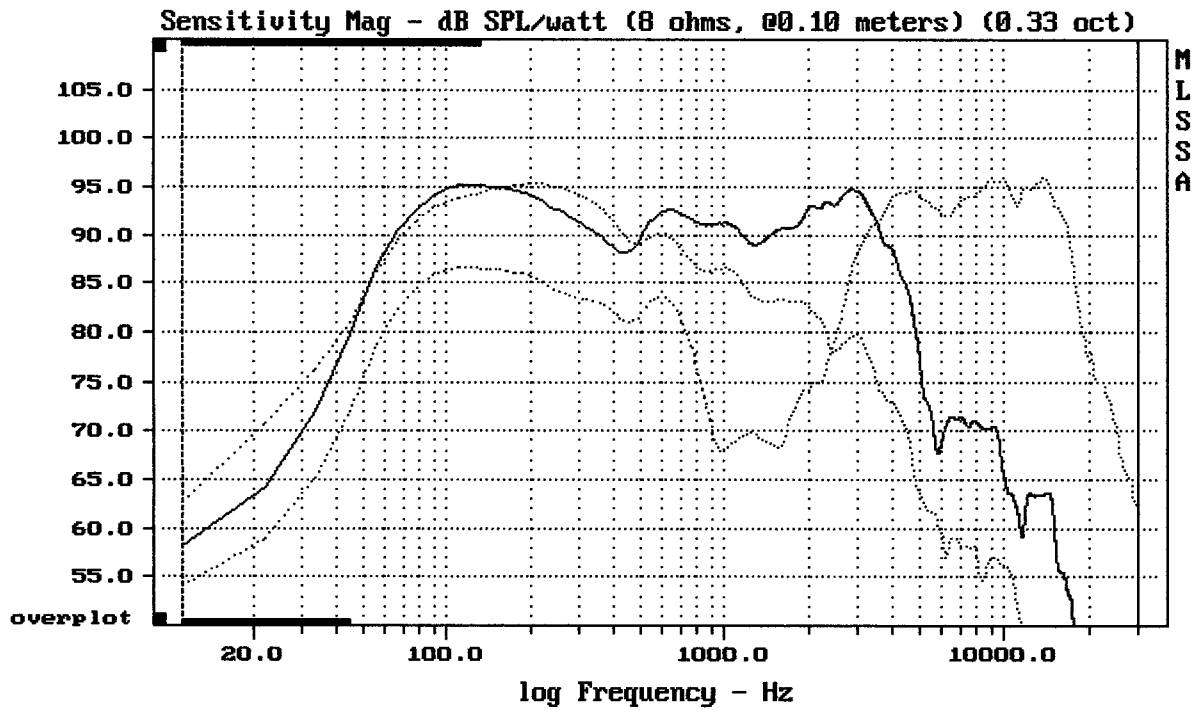

TAPCO 6925 + PSD2002 + FILTR

MLSSA: Frequency Domain

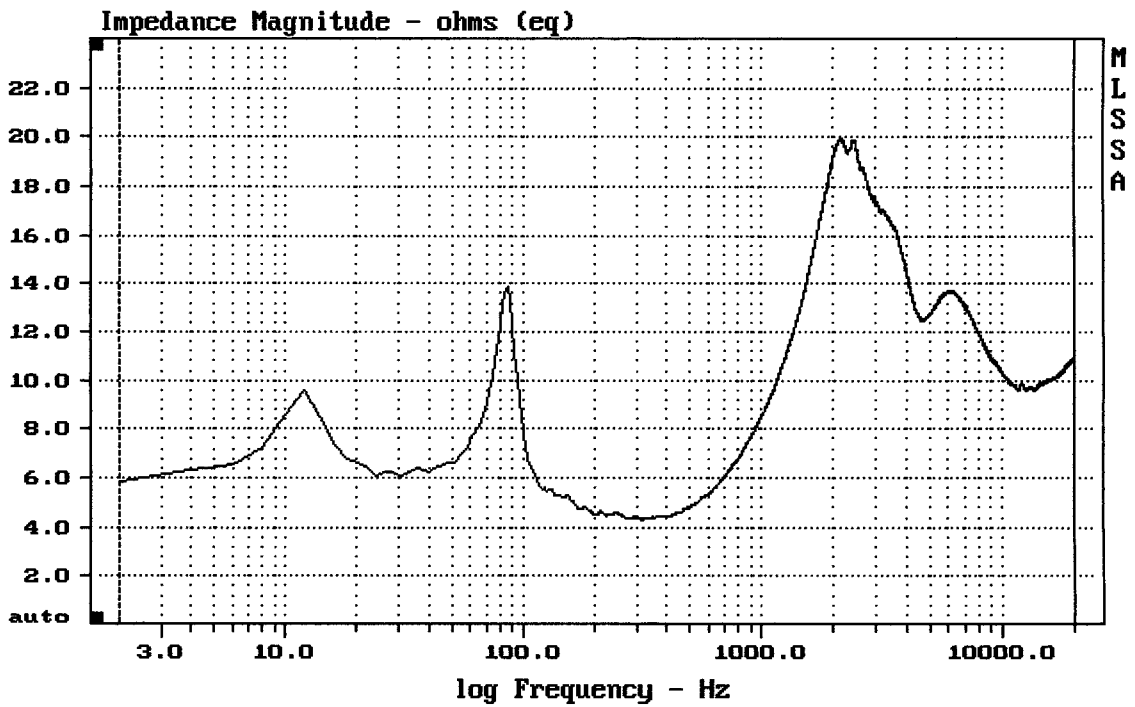

TAPCO 6925 + PSD2002 + FILTR