


mean: 7.513, rms: 8.987, std: 4.93, max: 21.64, min: 3.533


KV2 ES2.5

MLSSA: Frequency Domain

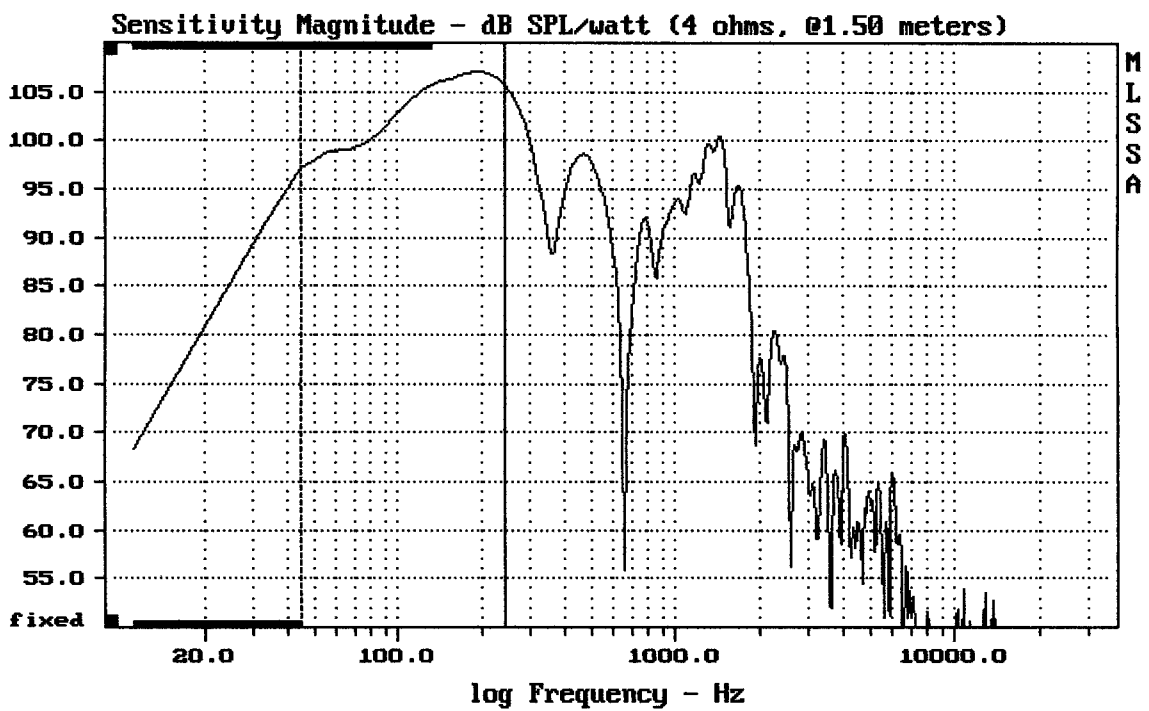

Level (44:244 Hz) = 103.83 dB SPL/watt (4 ohms, @1.50 meters)


KV2 ES2.5

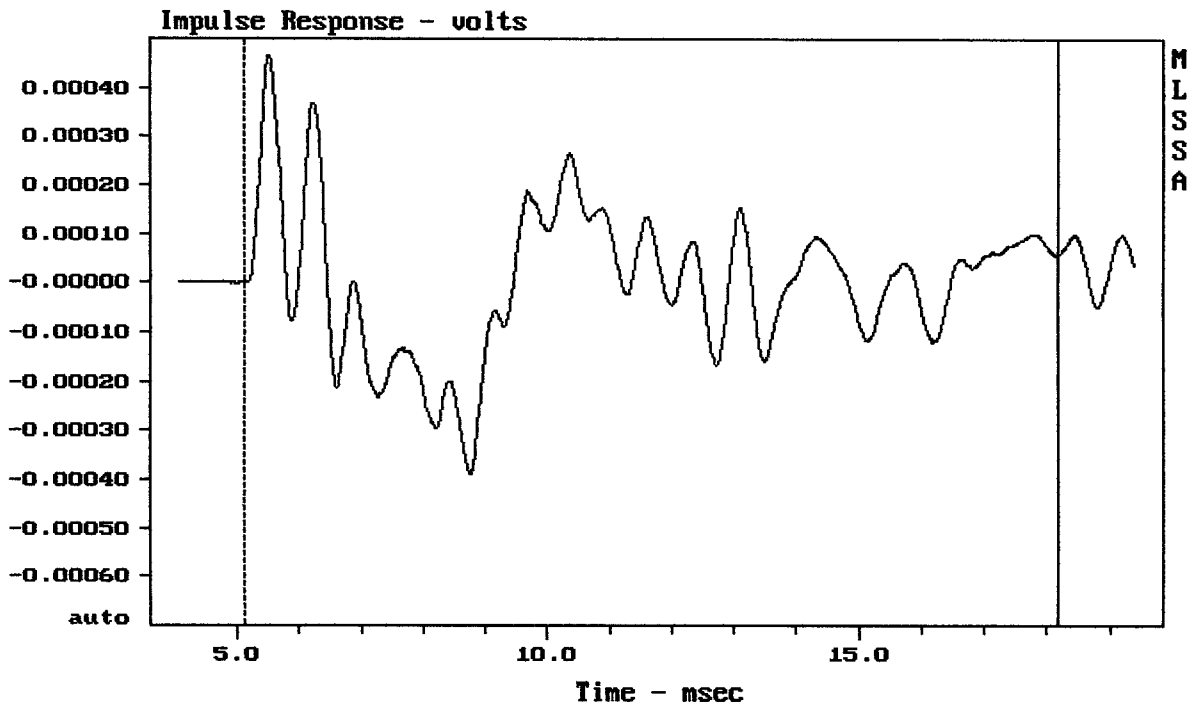

mean: 3.222e-006, rms: 0.0001476, std: 0.0001475, max: 0.0004667, min: -0.0003


KV2 ES2.5

MLSSA: Time Domain

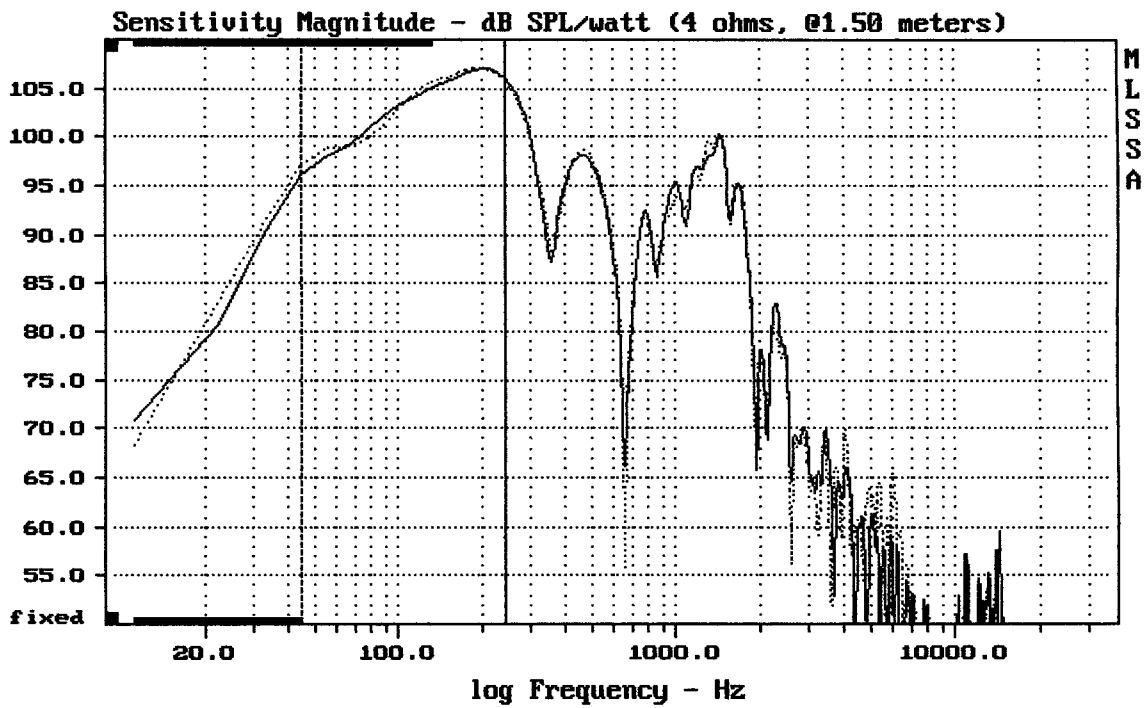

Overlay Compare: dev= +/-0.87, std= 0.51, avg= -0.12


KV2 ES2.5

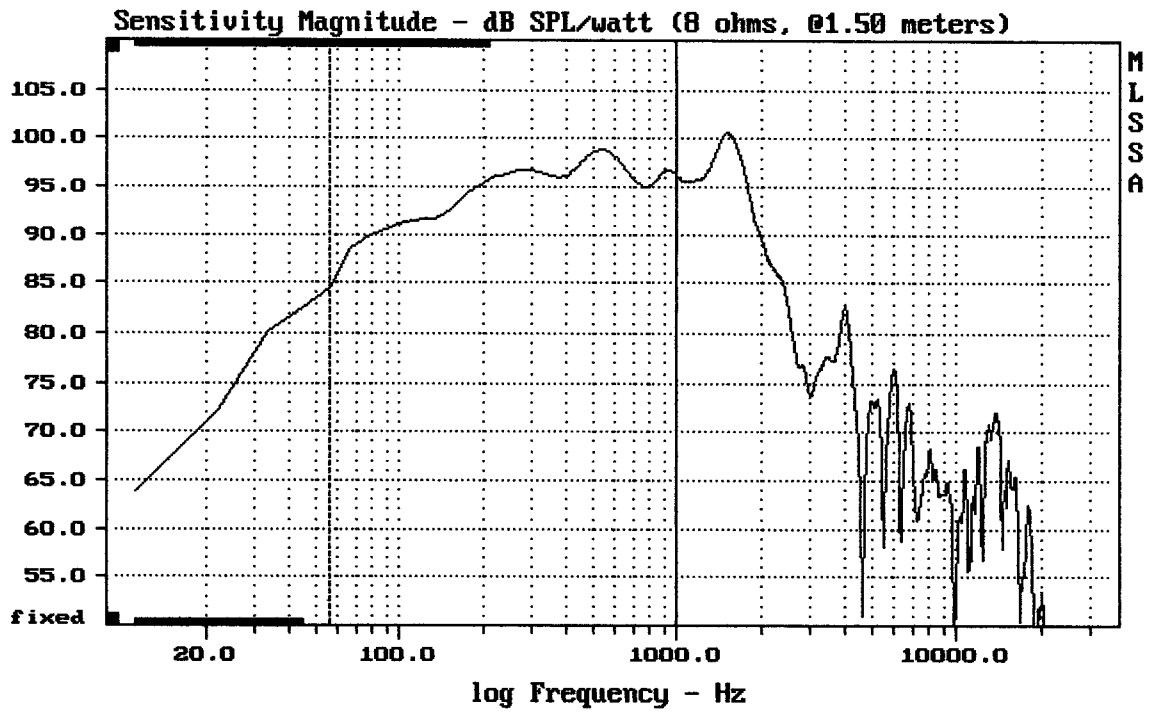

Level (55:999 Hz) = 95.06 dB SPL/watt (8 ohms, @1.50 meters)

15LW1403 FROM ES2.5

MLSSA: Frequency Domain

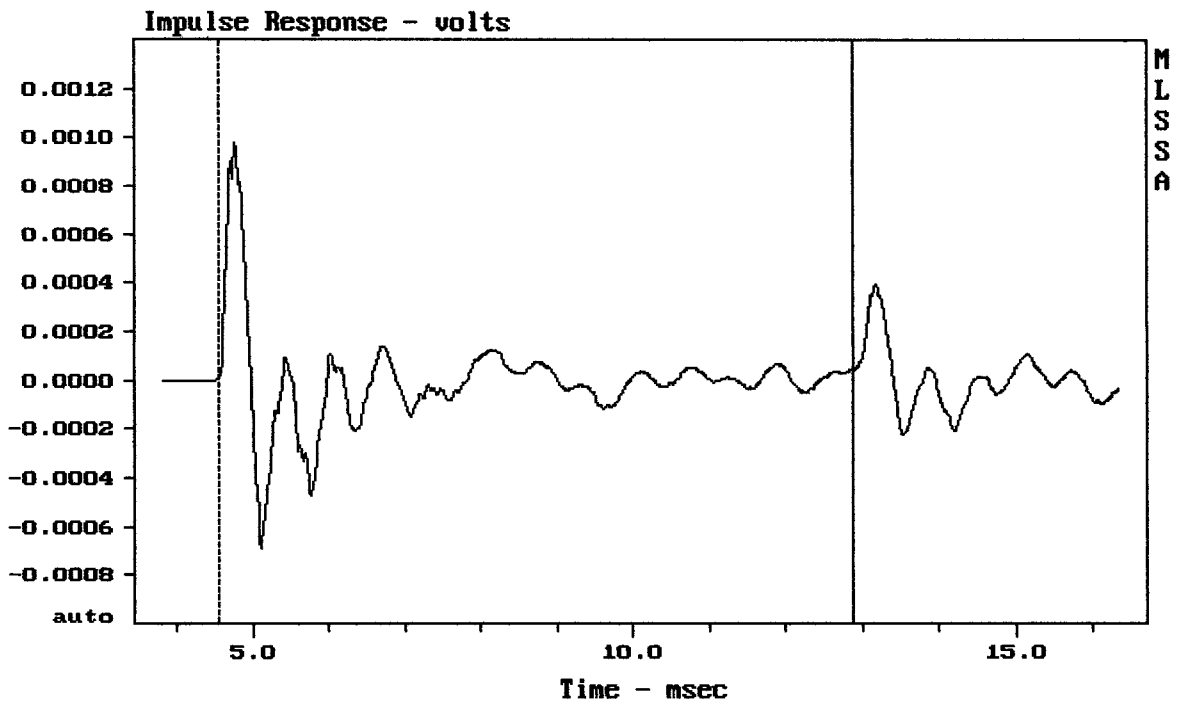

mean: $-2.902e-006$, rms: 0.0001895, std: 0.0001895, max: 0.0009818, min: -0.000

15LW1403 FROM ES2.5

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.83	Ohms
2	Fs	42.66	Hz
3	Re	6.00	Ohms[dc]
4	Res	101.83	Ohms
5	Qms	5.09	
6	Qes	0.30	
7	Qts	0.28	
8	L1	1.01	mH
9	L2	2.48	mH
10	R2	14.14	Ohms
11	RMSE-load	1.17	Ohms
12	Vas(Sd)	131.10	liters
13	Mms	115.82	grams
14	Cms	120	$\mu\text{M}/\text{Newton}$
15	B1	24.93	Tesla-M
16	SPLref(Sd)	97.1	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.4% (-20% to -50% is recommended).

15LW1403 FROM ES2.5

MLSSA: Parameters

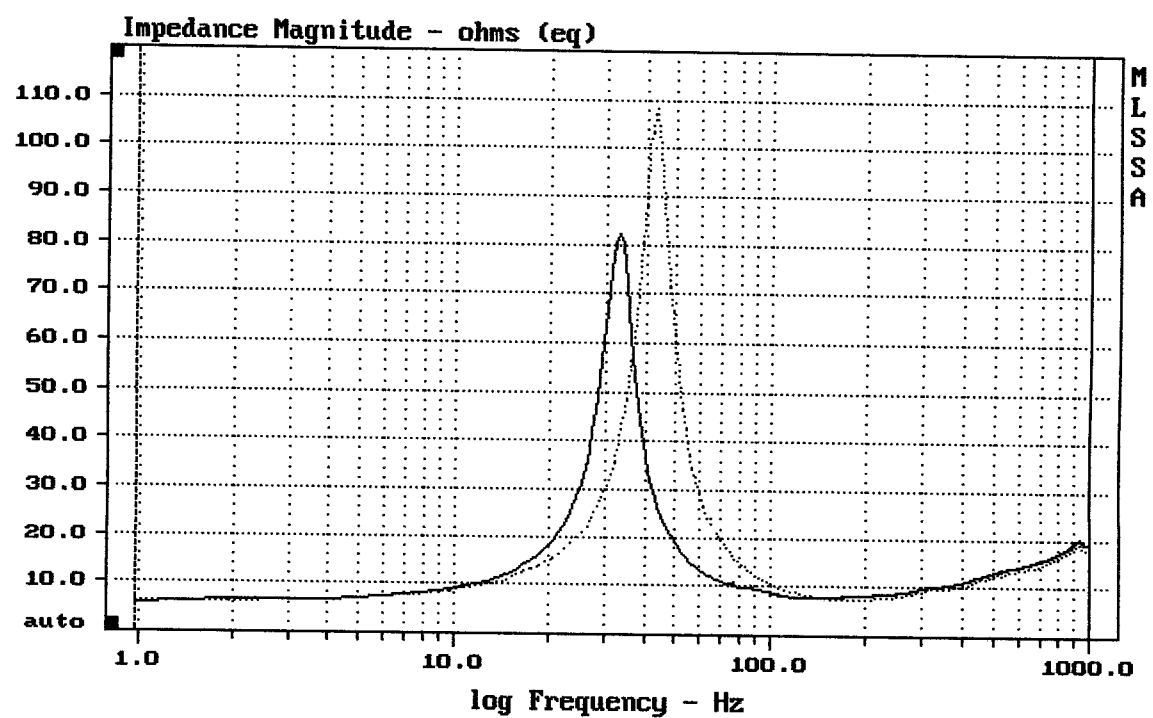

mean: 14.42, rms: 17.5, std: 9.914, max: 108.2, min: 6.206

MLSSA: Frequency Domain