



Level (89:20008 Hz) = 88.17 dB SPL/watt (4 ohms, @1.45 meters)

EAW JF-60

MLSSA: Frequency Domain

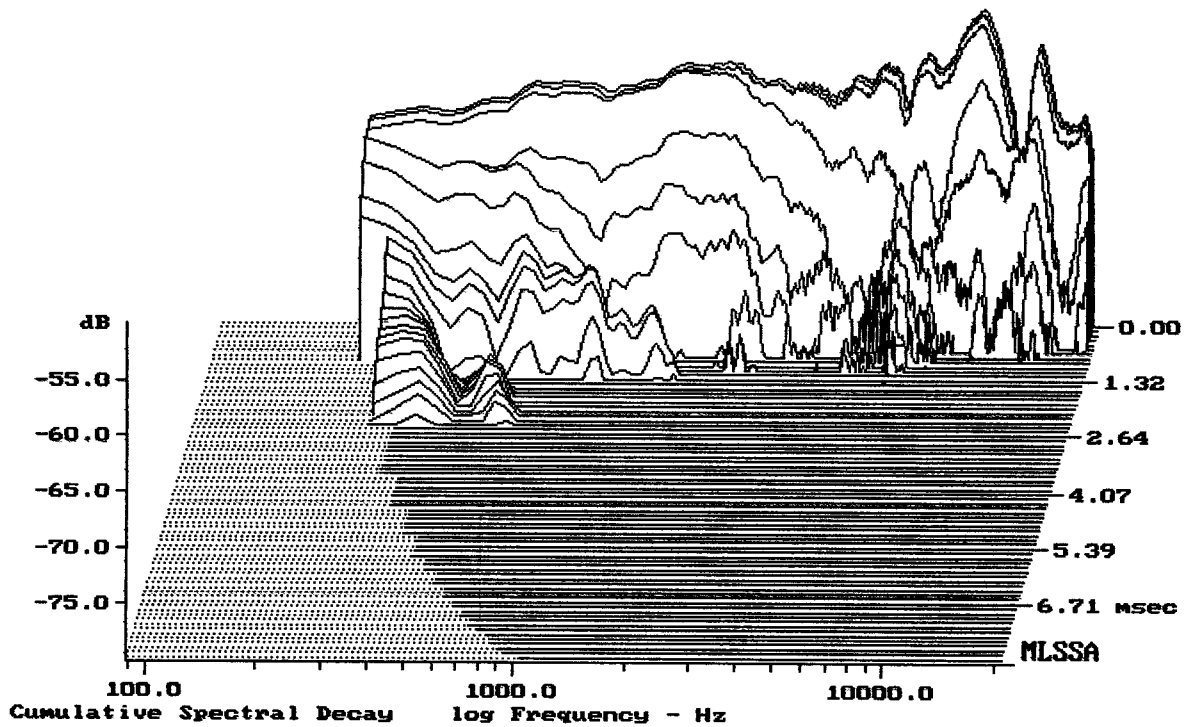


-77.67 dB, 6259 Hz (141), 1.100 msec (11)

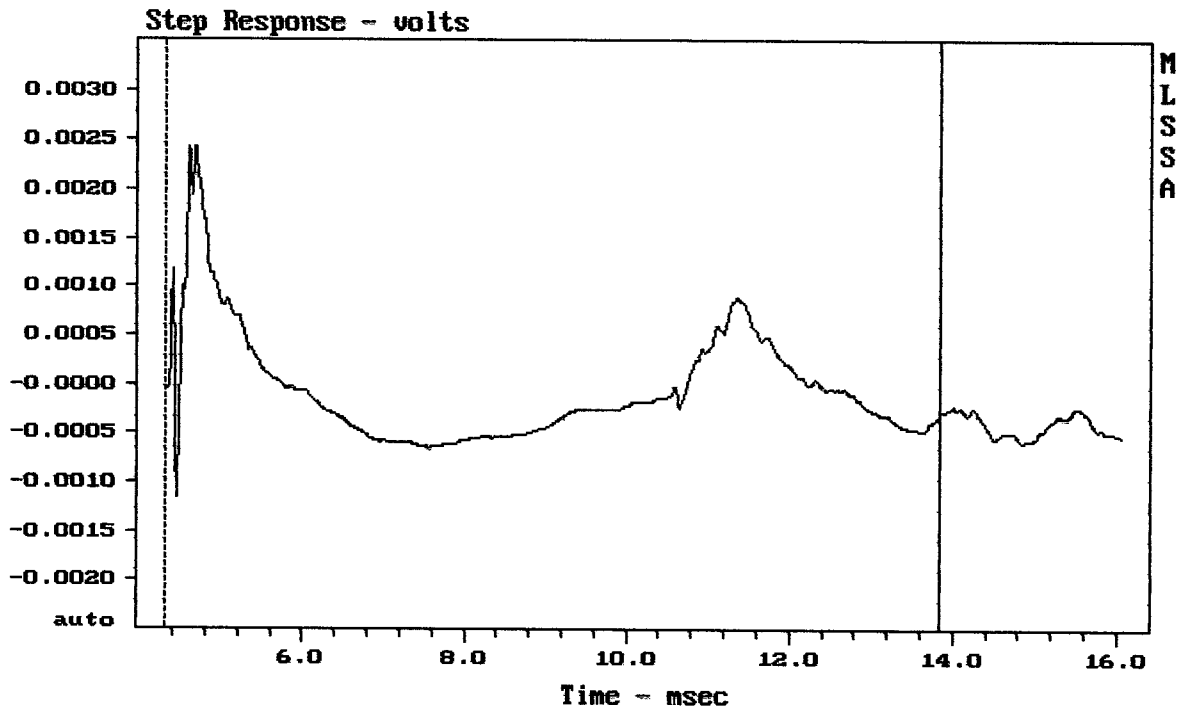

mean: $-6.477e-005$, rms: 0.0005613, std: 0.0005575, max: 0.002429, min: -0.0011


EAW JF-60

MLSSA: Time Domain

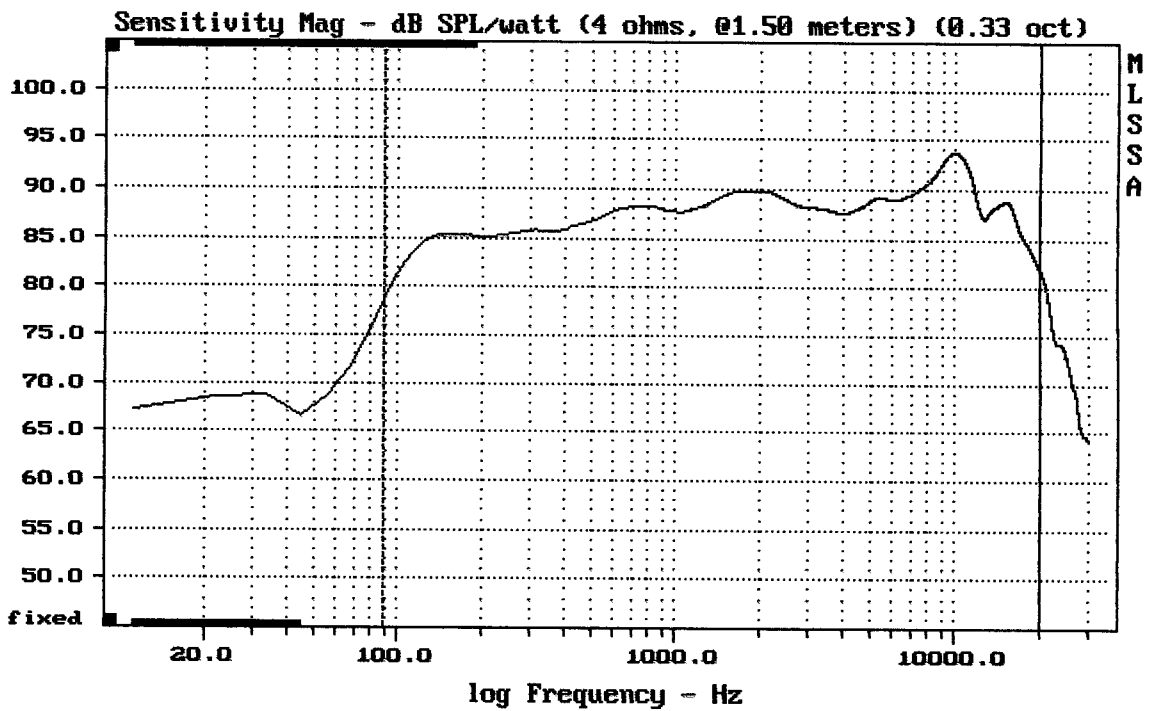


mean: 88.92, rms: 89.31, std: 2.32, max: 93.73, min: 78.72

EAW JF-60

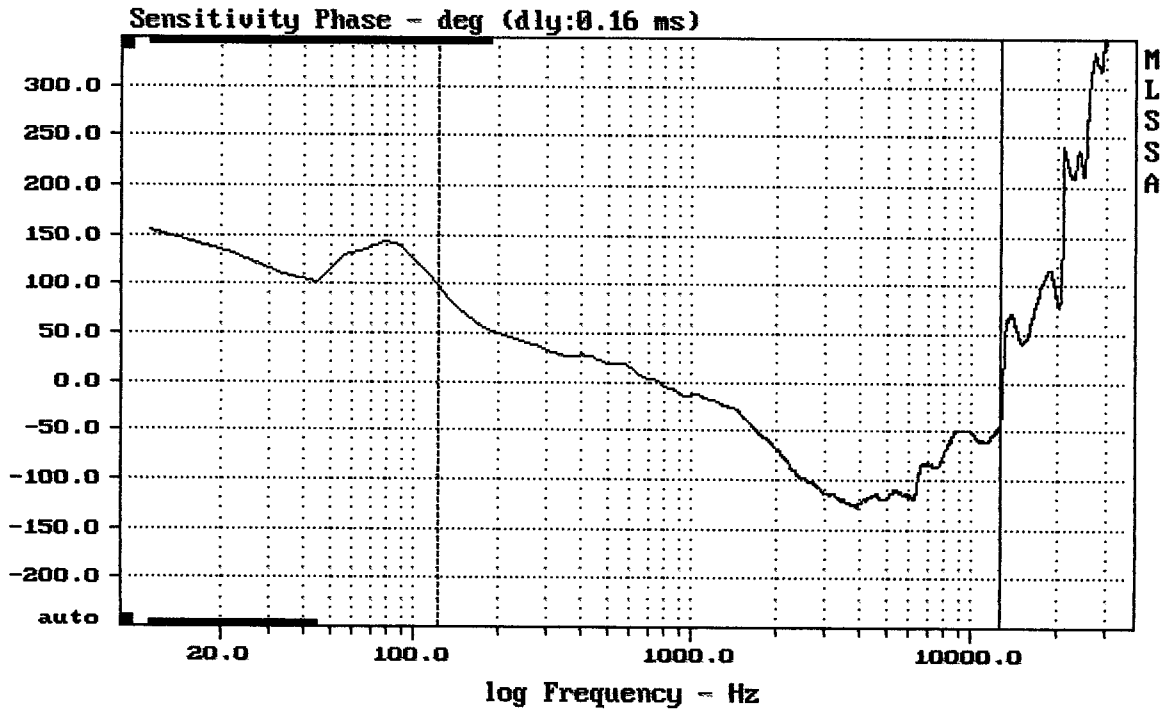


EAW JF-60

MLSSA: Frequency Domain

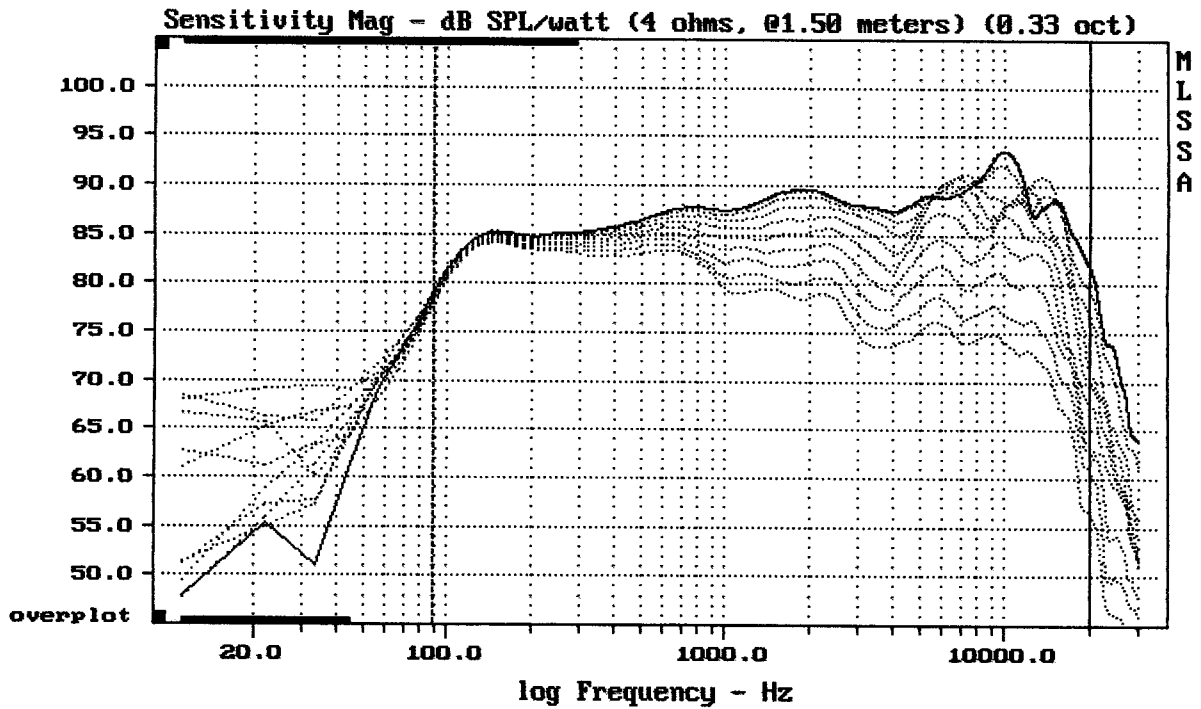


EAW JF-60

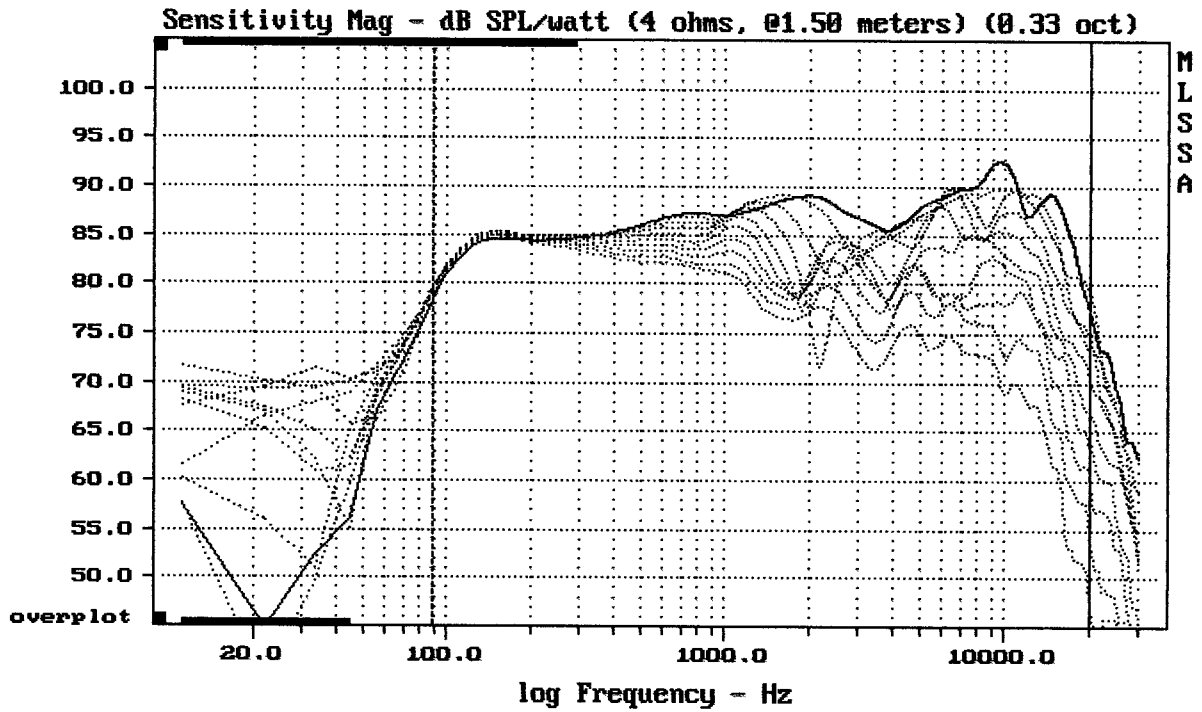

Overlay Compare: dev= +20/-13, std= 7.5, avg= -20


EAW JF-60

MLSSA: Frequency Domain

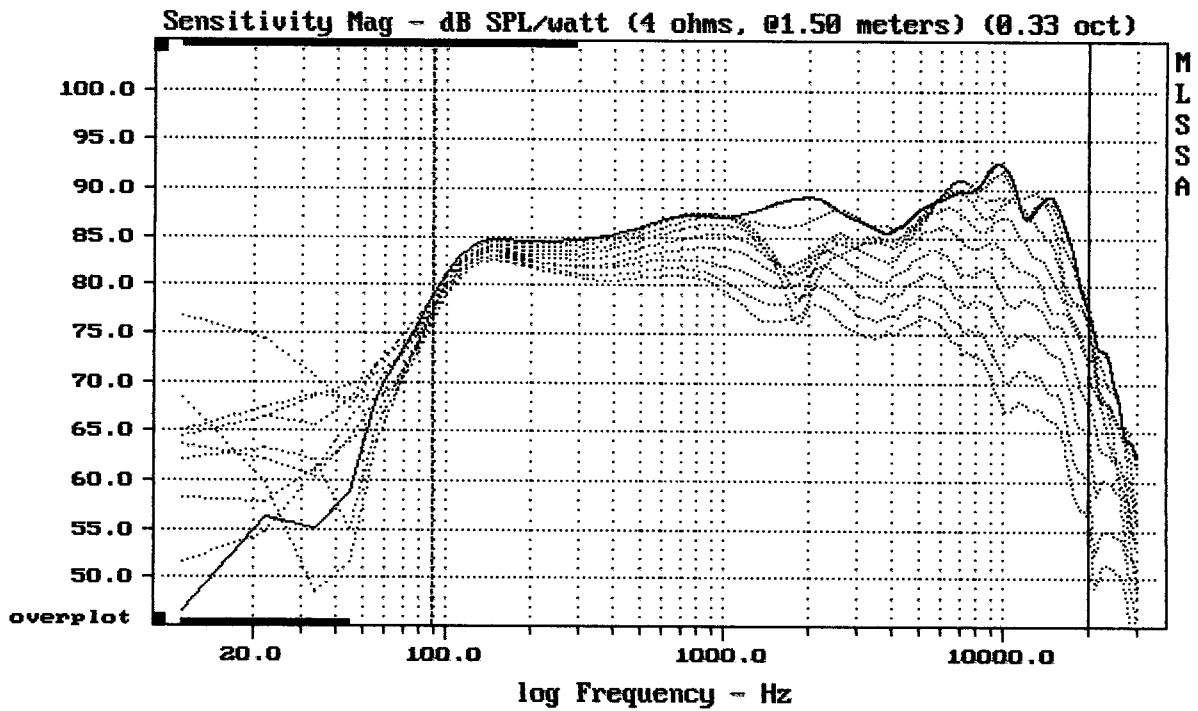

Overlay Compare: dev= +16/-7.2, std= 5.6, avg= -18


EAW JF-60

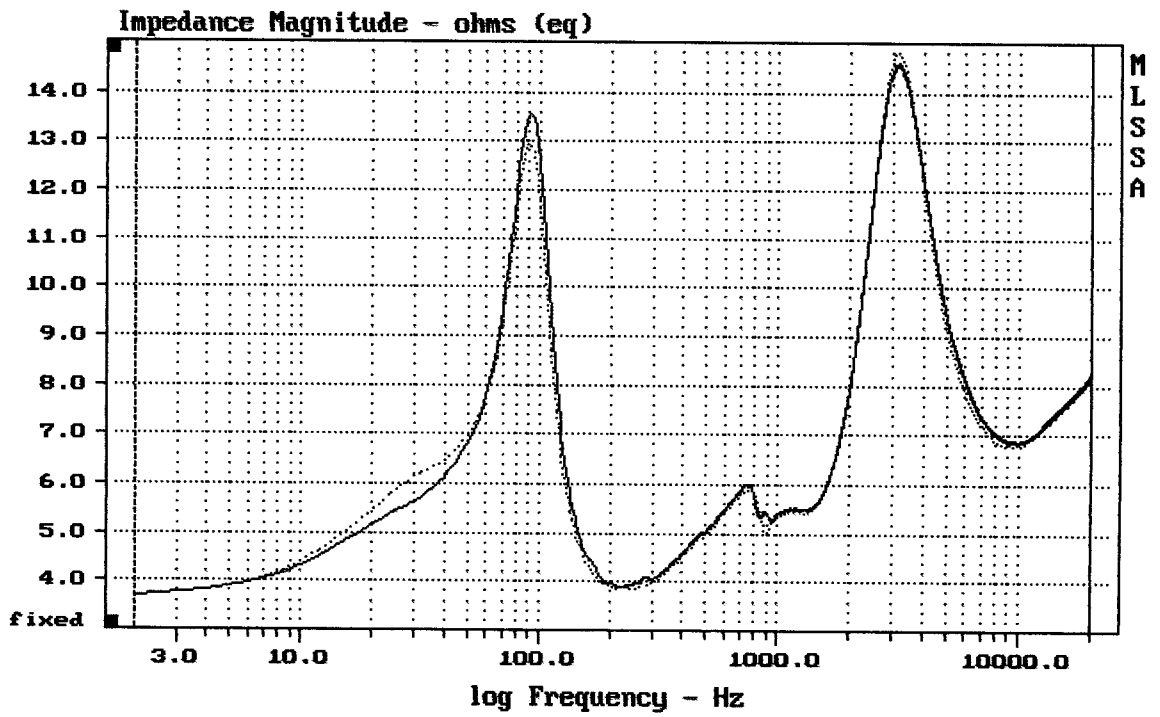

mean: 7.944, rms: 8.201, std: 2.038, max: 14.84, min: 3.704

EAW JF-60 2x


MLSSA: Frequency Domain

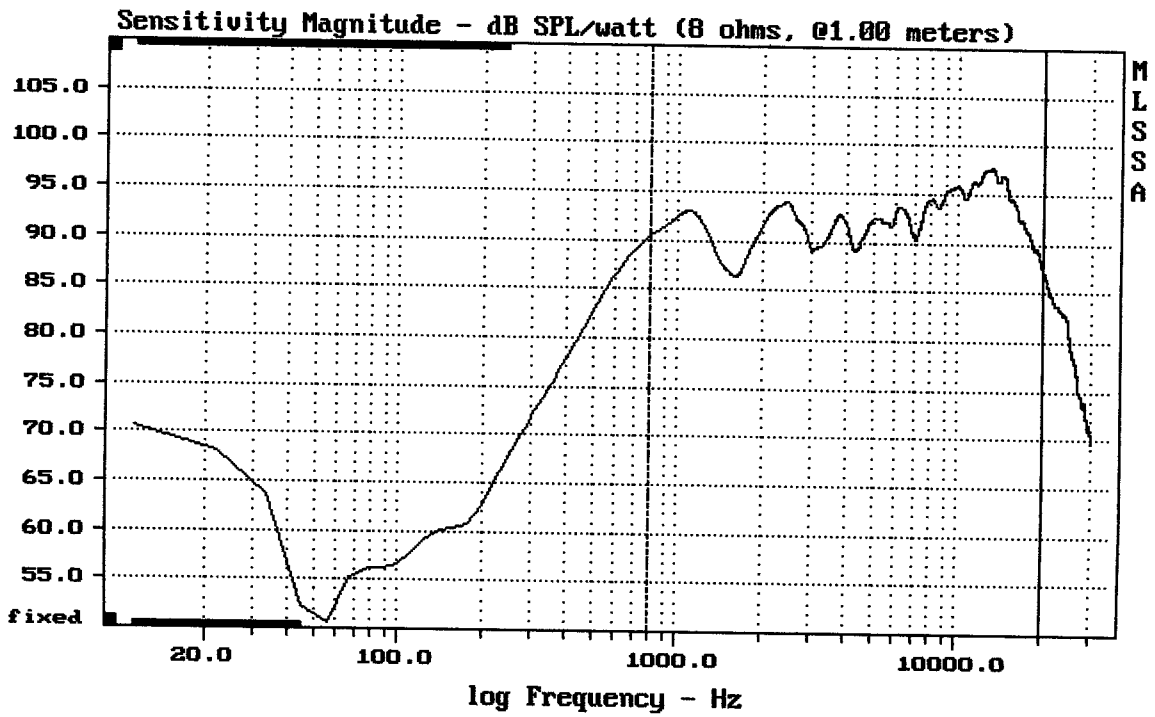


Level (799:20000 Hz) = 92.91 dB SPL/watt (8 ohms, @1.00 meters)

AUDAX TW034 FROM EAW JF-60

MLSSA: Frequency Domain

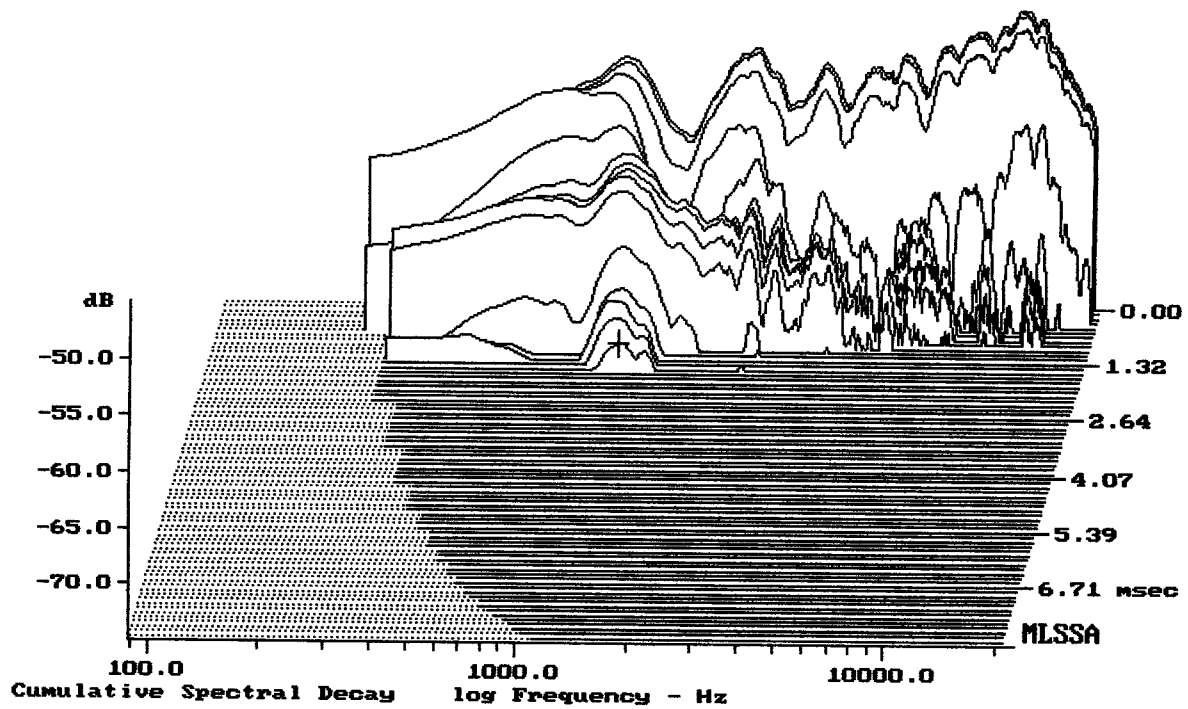


-72.73 dB, 1154 Hz (26), 1.540 msec (15)

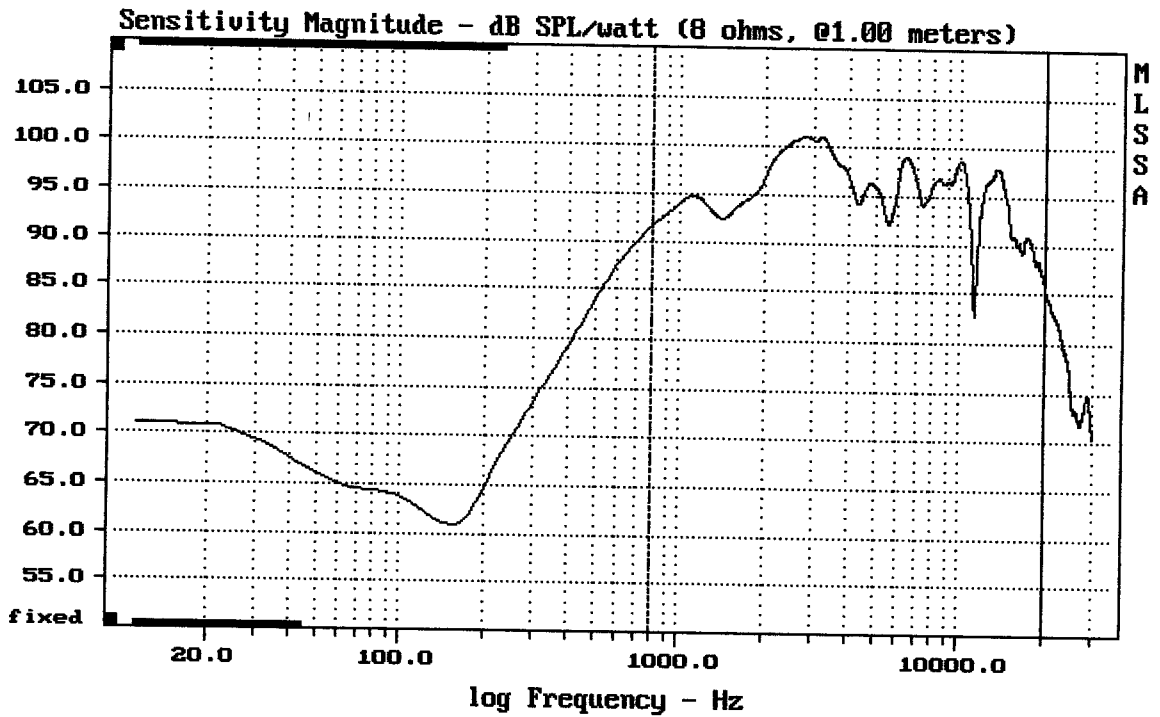


Level (799:20000 Hz) = 96.57 dB SPL/watt (8 ohms, @1.00 meters)

AUDAX TW034 WITH WAVEGUIDE FROM EAW JF-60

MLSSA: Frequency Domain

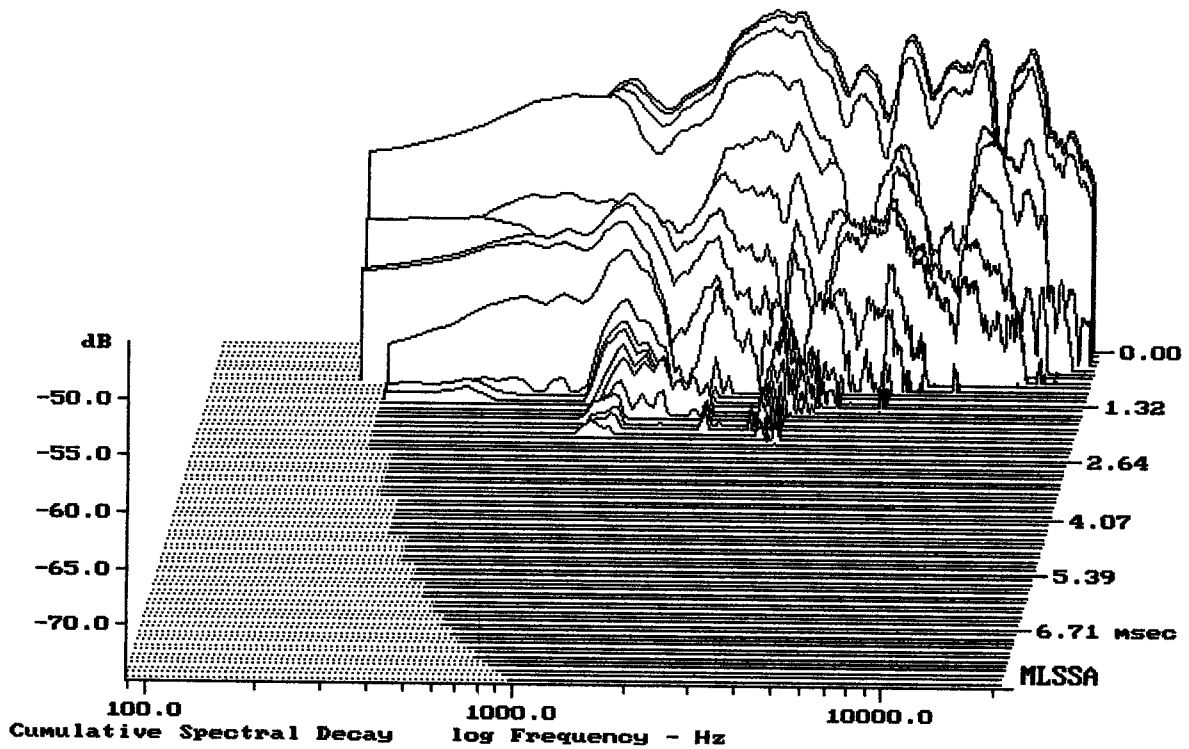


-73.99 dB, 3107 Hz (70), 2.200 msec (21)

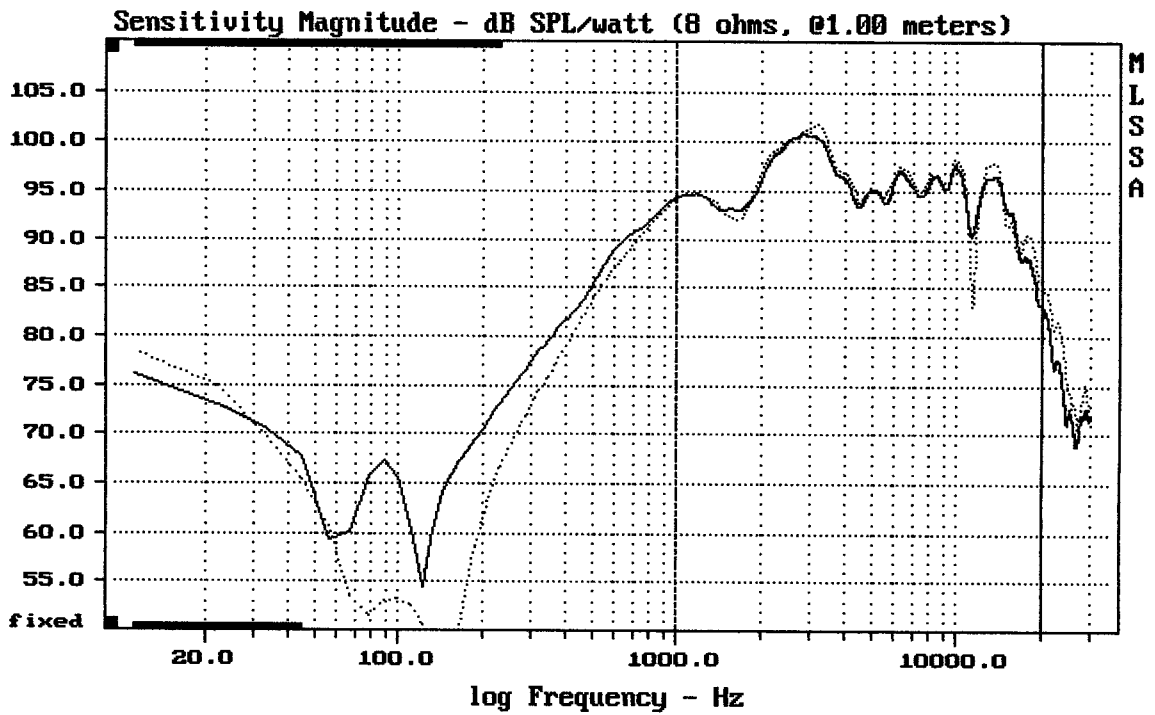


Overlay Compare: dev= +8.3/-2.4, std= 1.5, avg= -0.43

TW034 FROM JF-60 ORIG/OPR. /----

MLSSA: Frequency Domain

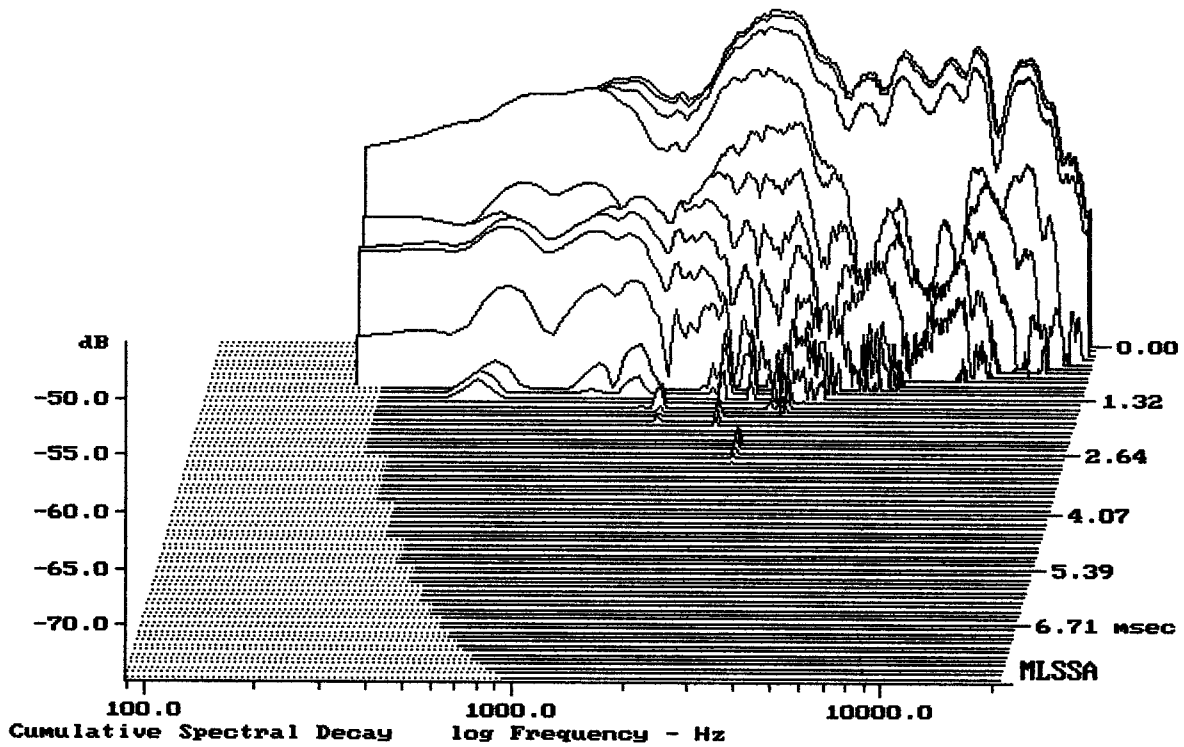


-74.74 dB, 3240 Hz (73), 1.430 msec (14)

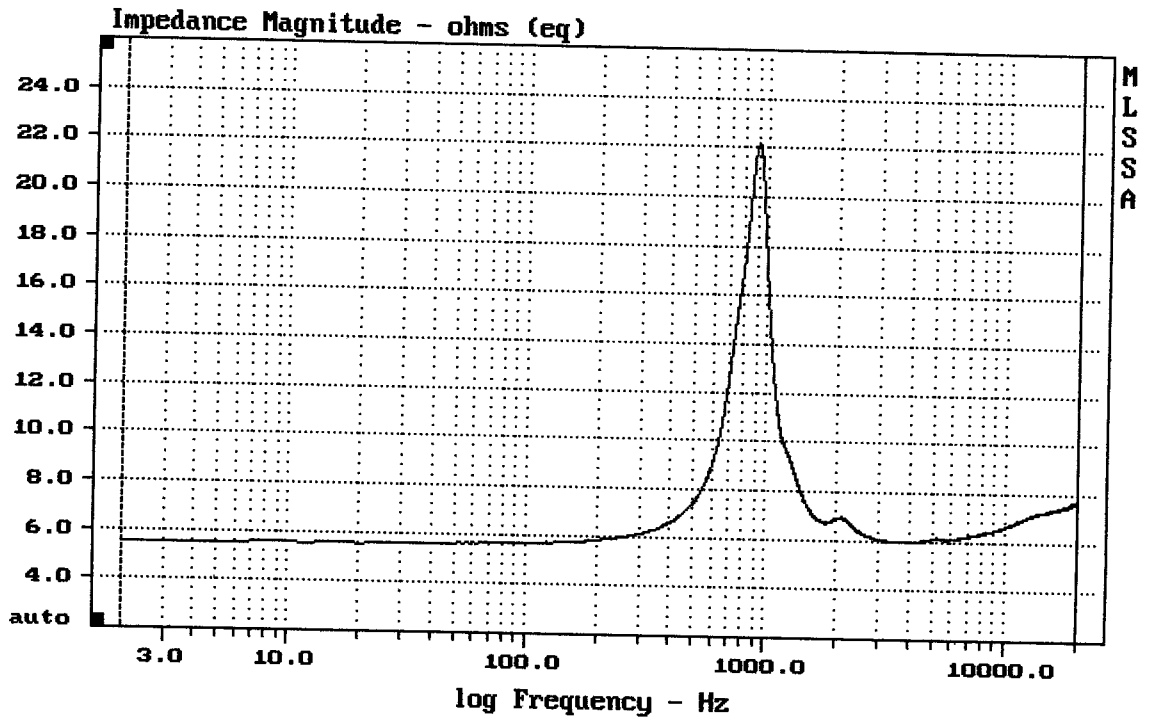


mean: 7.069, rms: 7.268, std: 1.687, max: 22.17, min: 5.53

TWEETER HD13D34HB WITH WAVEGUIDE FROM JF-60

MLSSA: Frequency Domain

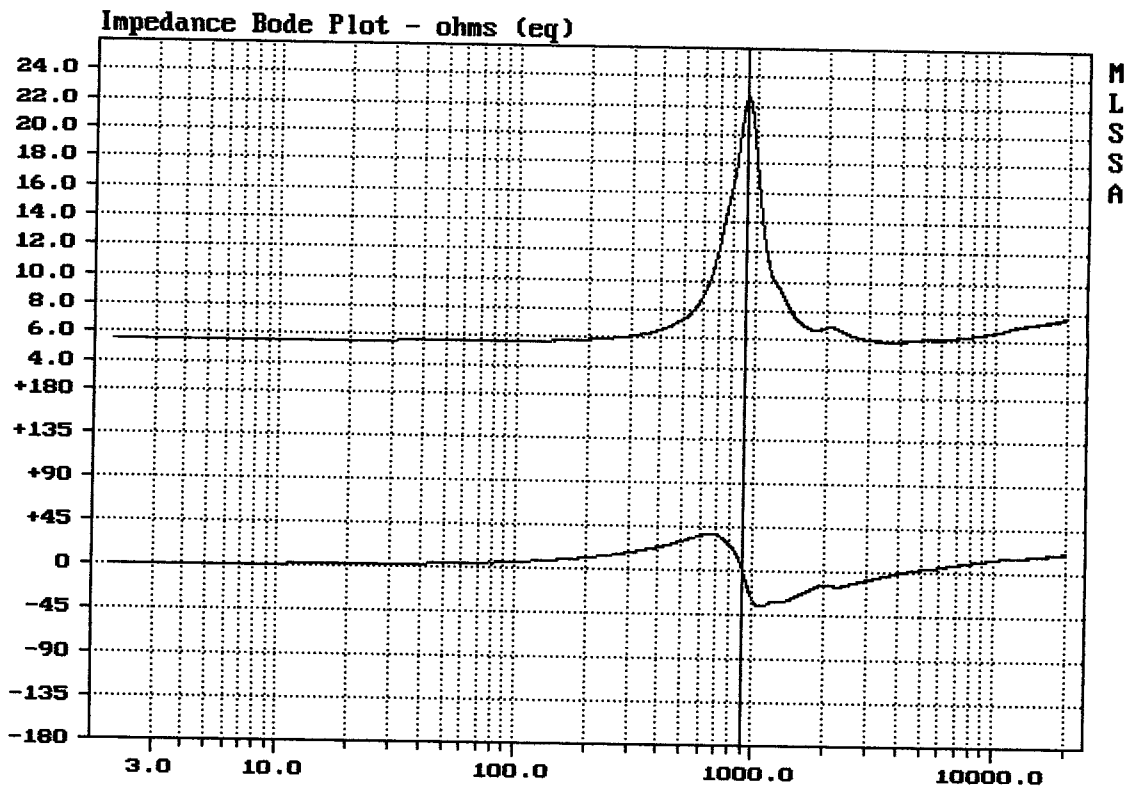


mag= 22.5, phase= -0.3 deg, 906.522 Hz (453)

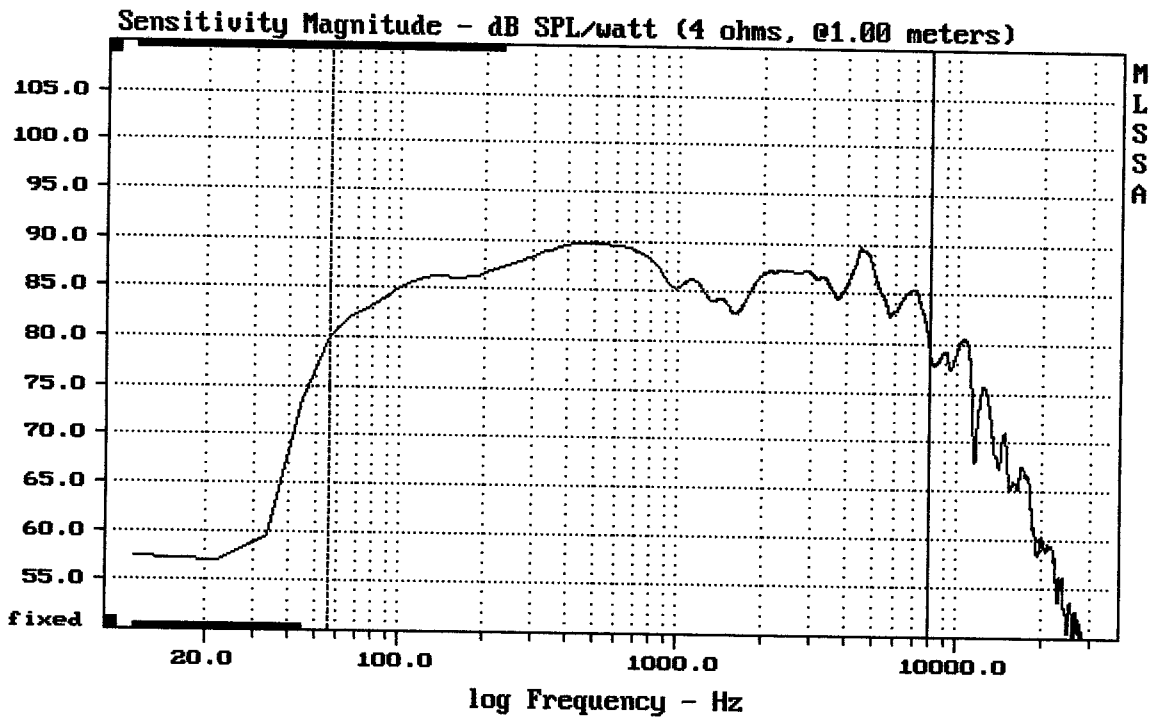

Level (55:8001 Hz) = 86.73 dB SPL/watt (4 ohms, @1.00 meters)

RCF WF160 FRM EAW JF-60 2x

MLSSA: Frequency Domain

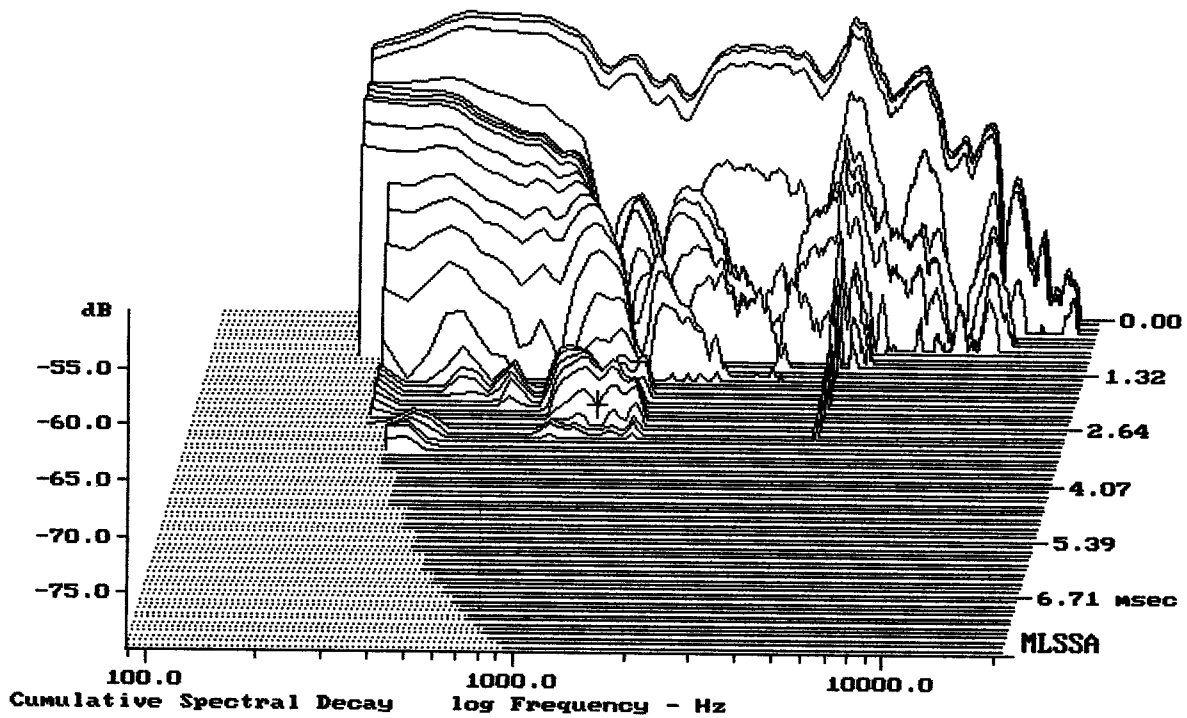

-78.52 dB, 1110 Hz (25), 2.530 msec (24)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.24	Ohms
2	Fs	57.94	Hz
3	Re	3.21	Ohms[dc]
4	Res	25.39	Ohms
5	Qms	3.48	
6	Qes	0.44	
7	Qts	0.39	
8	L1	0.12	mH
9	L2	0.64	mH
10	R2	4.59	Ohms
11	RMSE-load	0.42	Ohms
12	Vas(Sd)	16.20	liters
13	Mms	11.53	grams
14	Cms	655	$\mu\text{M}/\text{Newton}$
15	Bl	5.53	Tesla-M
16	SPLref(Sd)	90.4	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (20.00 grams)

Area (Sd): 132.73 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -38.7% (-20% to -50% is recommended).

RCF WF160 FROM EAW JF-60

MLSSA: Parameters

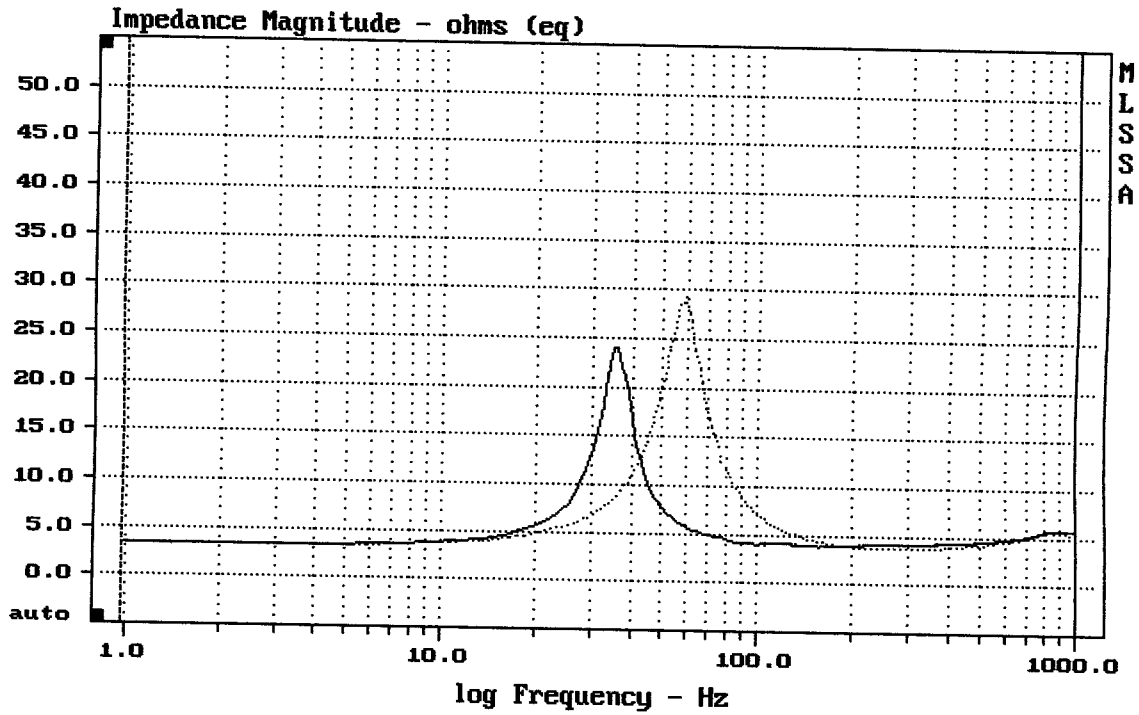

mean: 5.347, rms: 6.257, std: 3.25, max: 29.34, min: 3.303

MLSSA: Frequency Domain