



---

mean: 24.48, rms: 27.15, std: 11.74, max: 86.34, min: 10.14

---

EAW MK5194

MLSSA: Frequency Domain

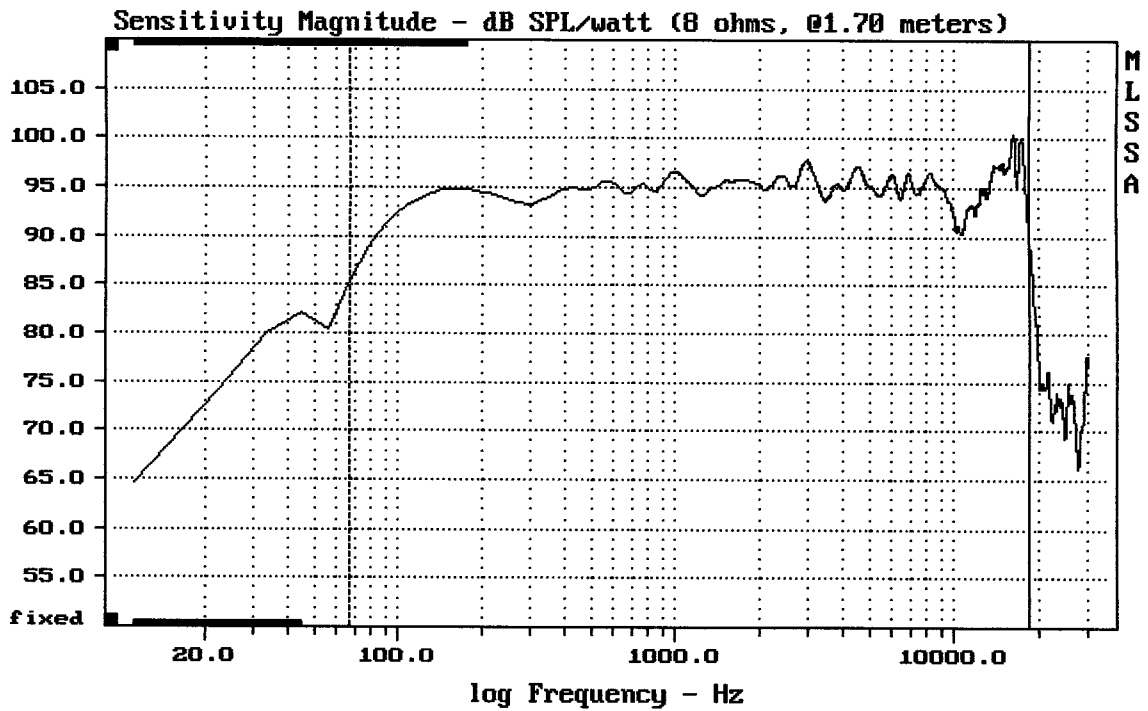



---

Level (67:18510 Hz) = 94.89 dB SPL/watt (8 ohms, @1.70 meters)

---


EAW MK5194

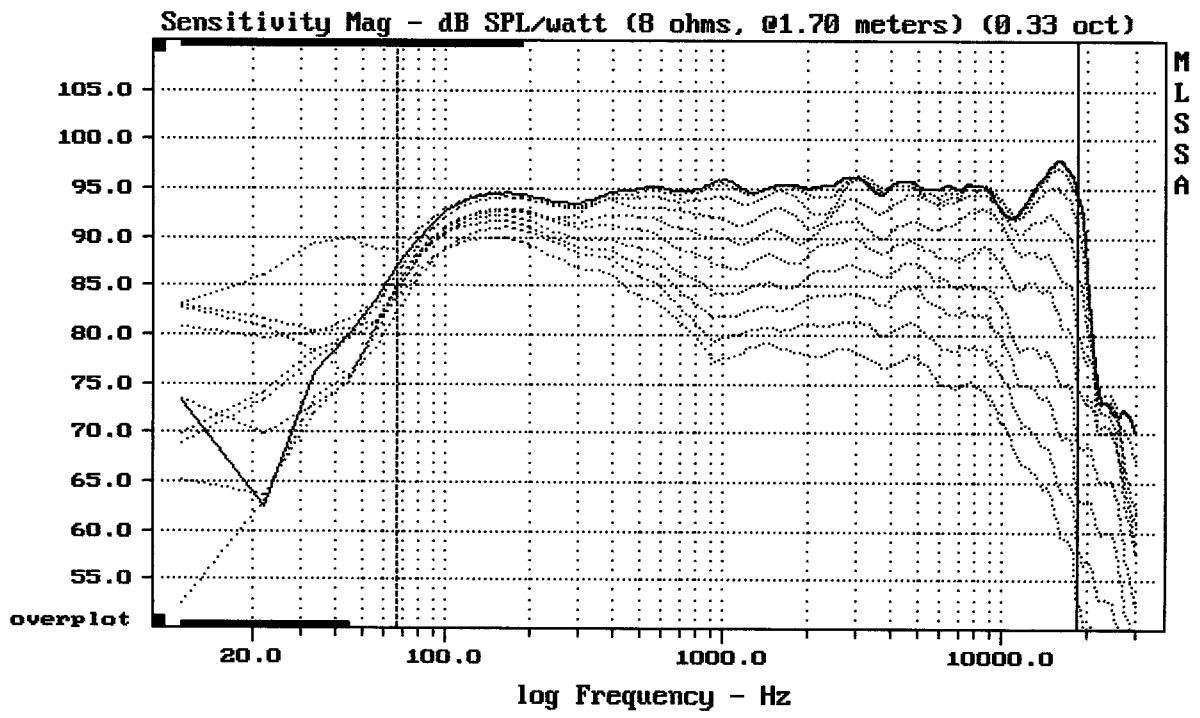

Overlay Compare: dev= +21/-17, std= 8.2, avg= -25


EAW MK5194 0/10/...90 DEG.HOR.

MLSSA: Frequency Domain

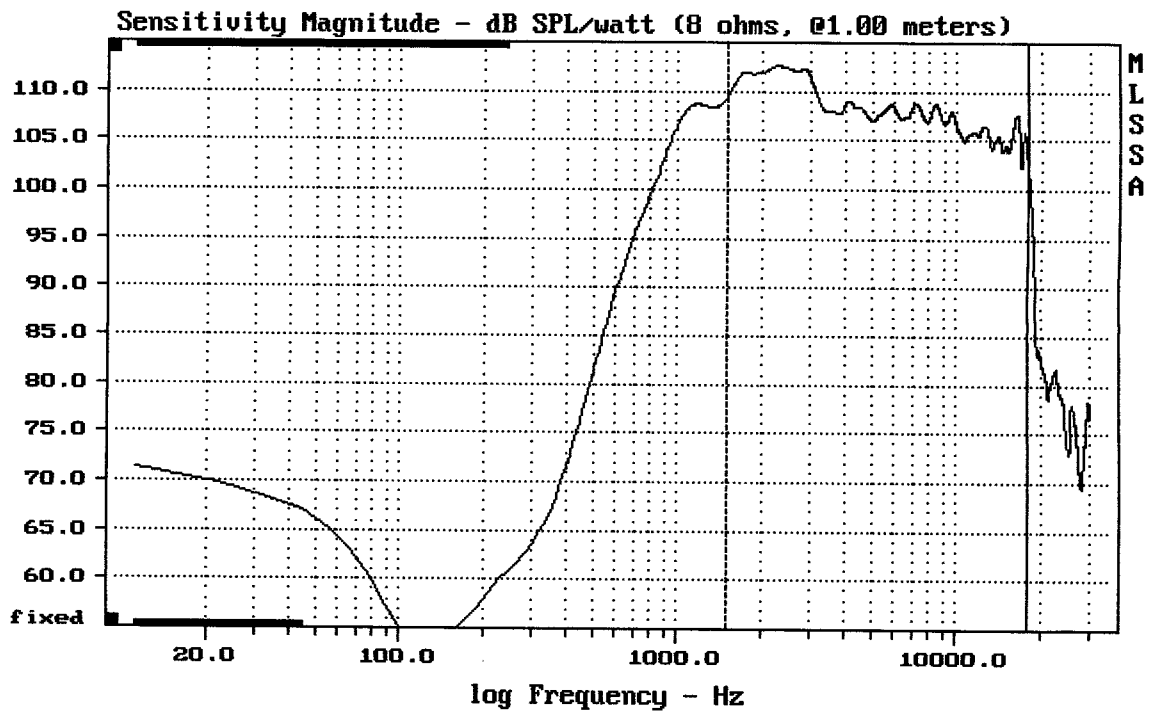

Level (1498:18000 Hz) = 109.19 dB SPL/watt (8 ohms, @1.00 meters)


B&C DRIVER 2 MK5194 + H100

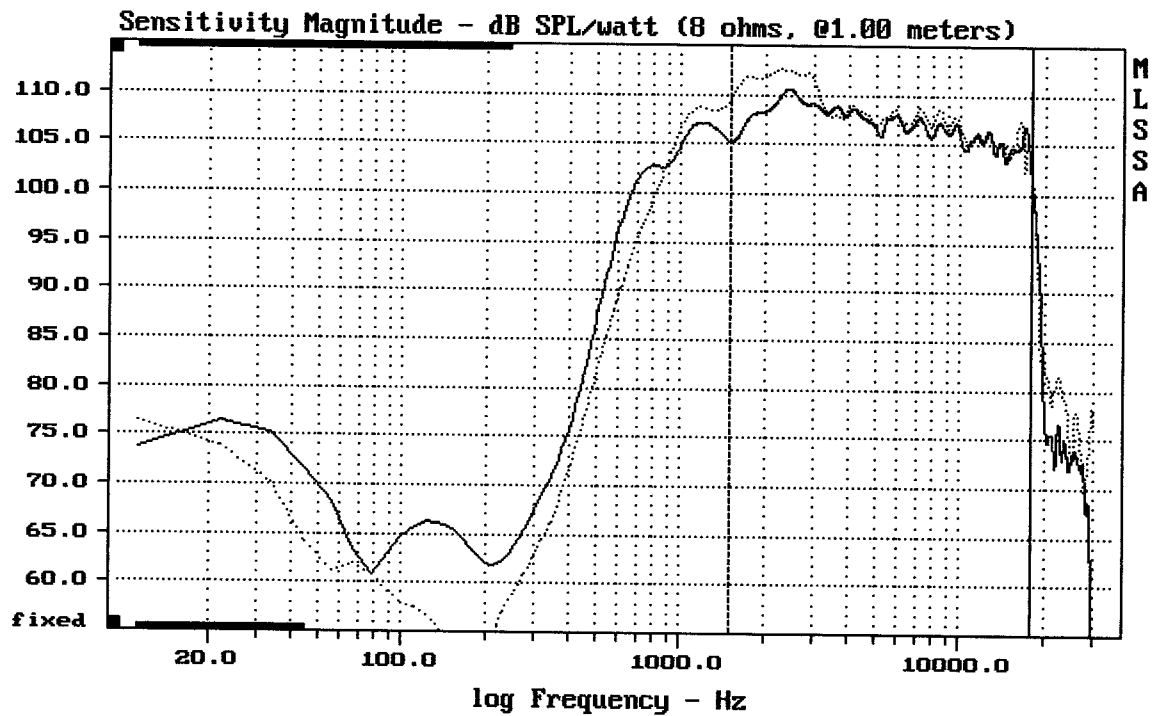

Overlay Compare: dev= +5.1/-4.4, std= 1.3, avg= -0.69


B&C DRIVER Z MK5194 + H100

MLSSA: Frequency Domain

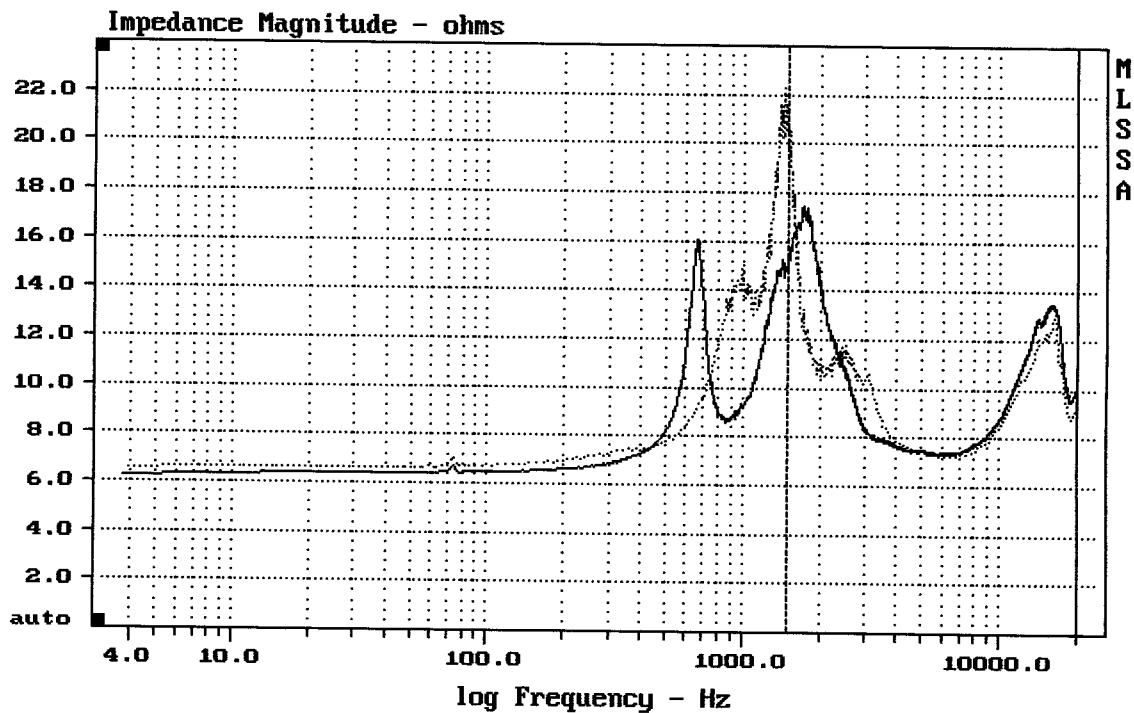

Overlay Compare: dev= +5/-5.9, std= 0.89, avg= 0.42

DTT01 /DE25]

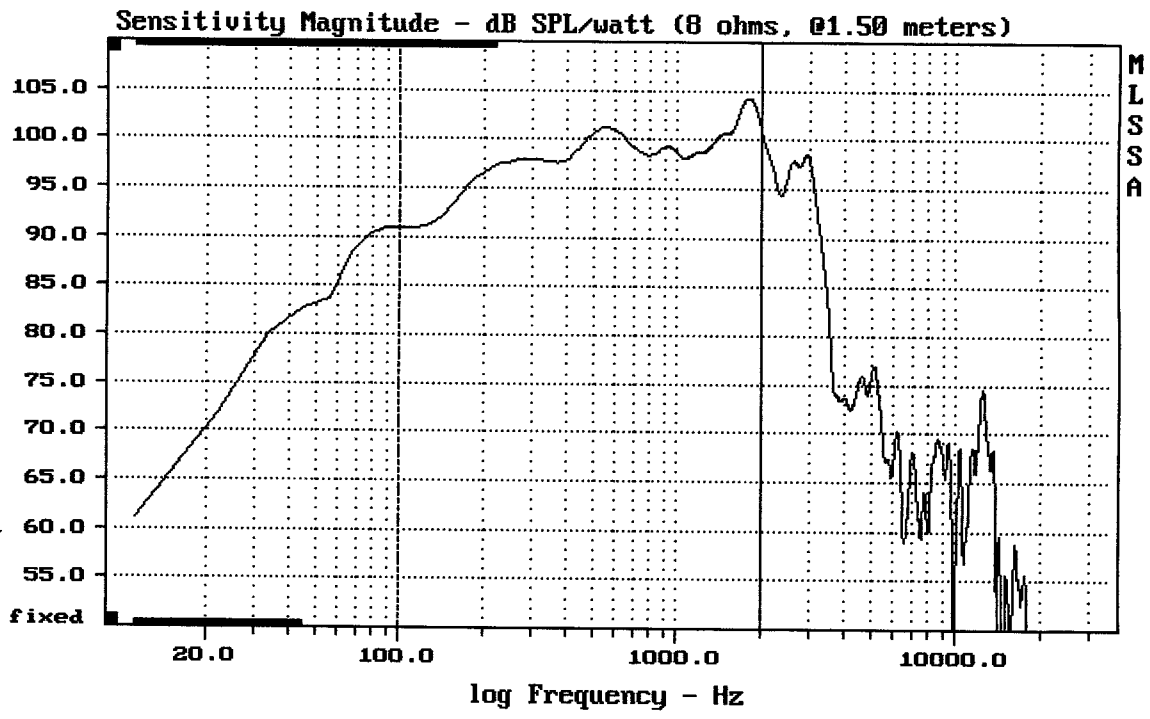


---

Level (100:2009 Hz) = 98.76 dB SPL/watt (8 ohms, @1.50 meters)

---

EMINENCE [804071] 2 EAW MK5194

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.06	Ohms
2	Fs	42.19	Hz
3	Re	7.18	Ohms [dc]
4	Res	81.61	Ohms
5	Qms	3.66	
6	Qes	0.32	
7	Qts	0.30	
8	L1	0.65	mH
9	L2	2.54	mH
10	R2	12.52	Ohms
11	RMSE-load	1.06	Ohms
12	Vas (Sd)	201.04	liters
13	Mms	72.72	grams
14	Cms	196	$\mu\text{M}/\text{Newton}$
15	B1	20.74	Tesla-M
16	SPLref (Sd)	98.5	dB [Re]
17	Rub-index	0.09	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.7% (-20% to -50% is recommended).

EAW EMINENCE 804071 Z MK5194

MLSSA: Parameters

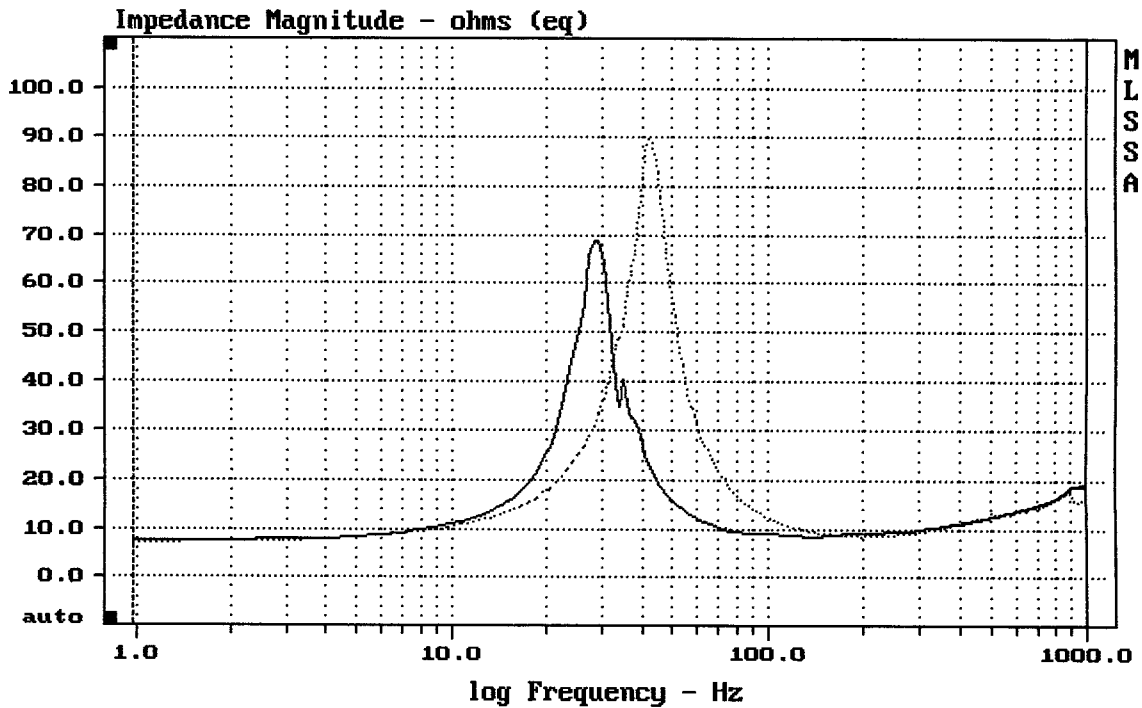

CURSOR: dy = -2.96085 x = 1000.9766 (1025)

DTTO

MLSSA: Frequency Domain

*BDP = 140.6*