


Level (78:18499 Hz) = 93.99 dB SPL/watt (8 ohms, @1.70 meters)

EAW MK2194


MLSSA: Frequency Domain

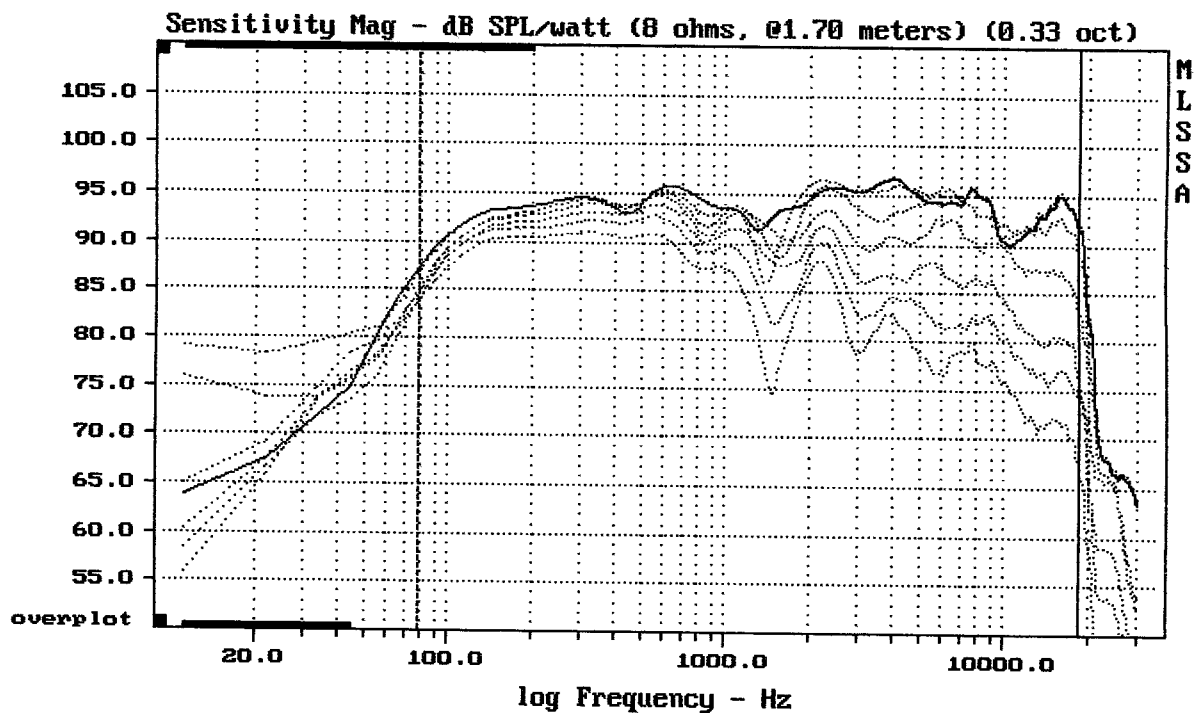

Overlay Compare: dev= +15/-7.8, std= 5, avg= -17

EAW MK2194

0 = 60° HRTWRC

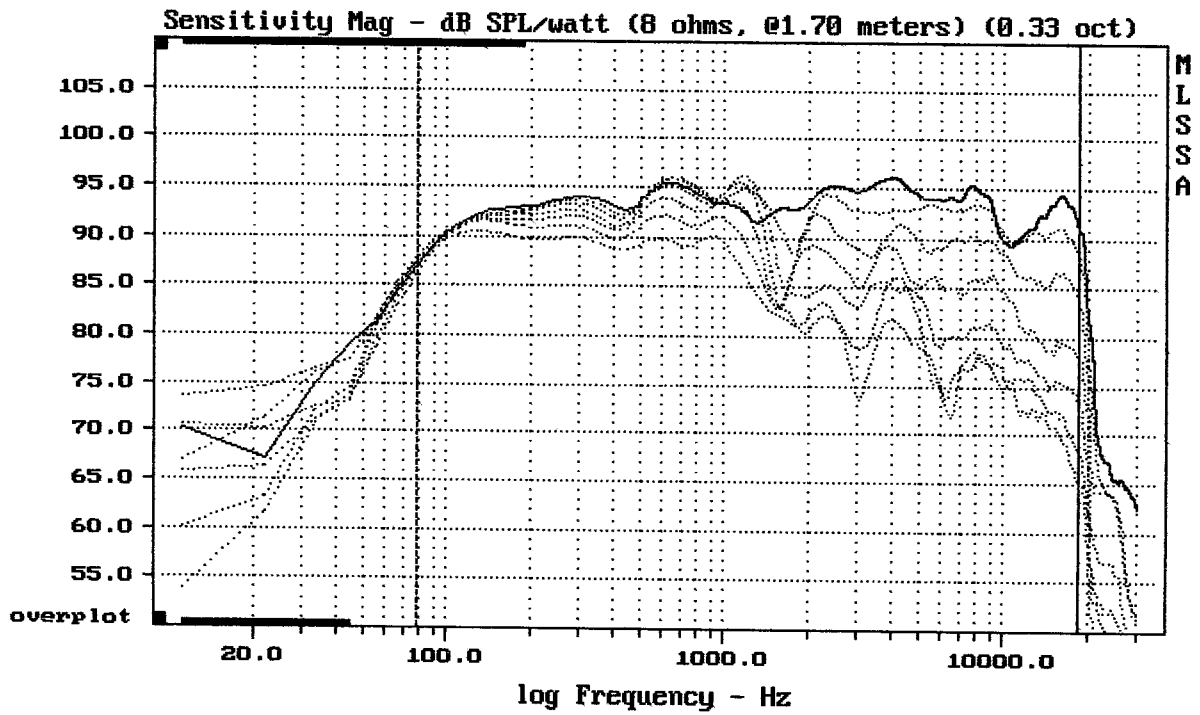


Overlay Compare: dev= +18/-8.9, std= 5.5, avg= -18

EAW MK2194

$0 = 60^\circ$ 2060


MLSSA: Frequency Domain

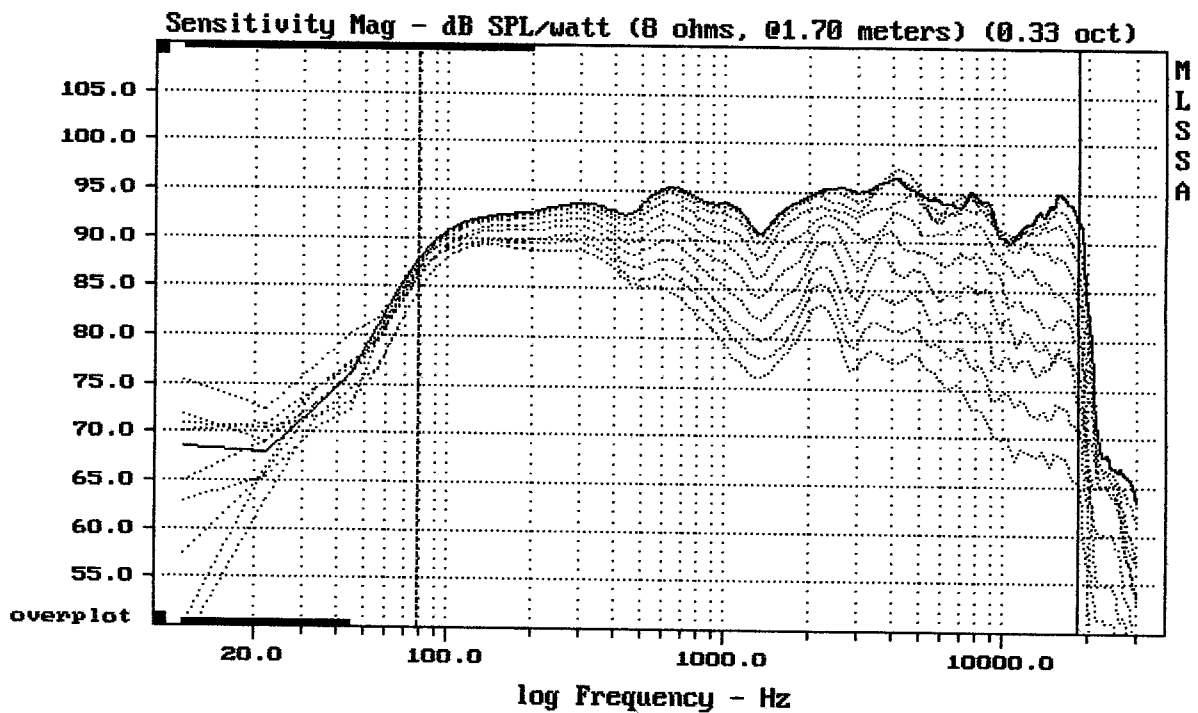

Overlay Compare: dev= +18/-6.9, std= 5, avg= -21


EAW MK2194

$0 = 90^\circ$ 407.

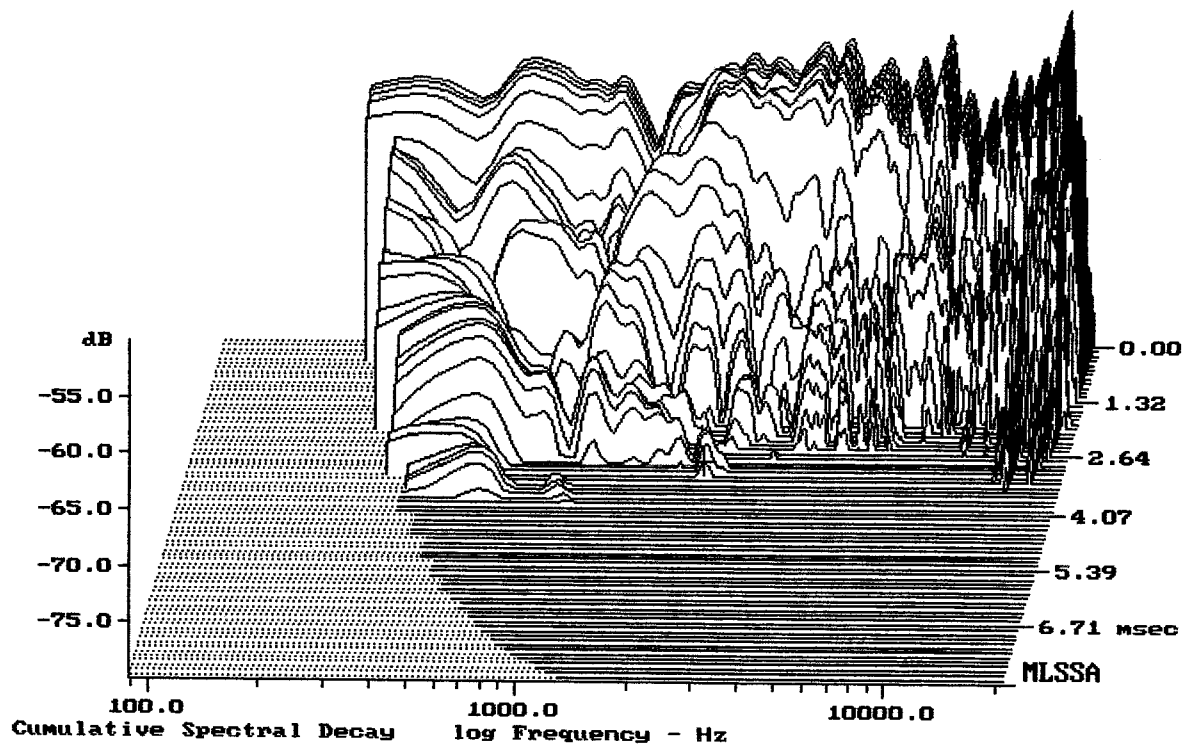


-78.73 dB, 2264 Hz (51), 3.190 msec (30)


DTTO

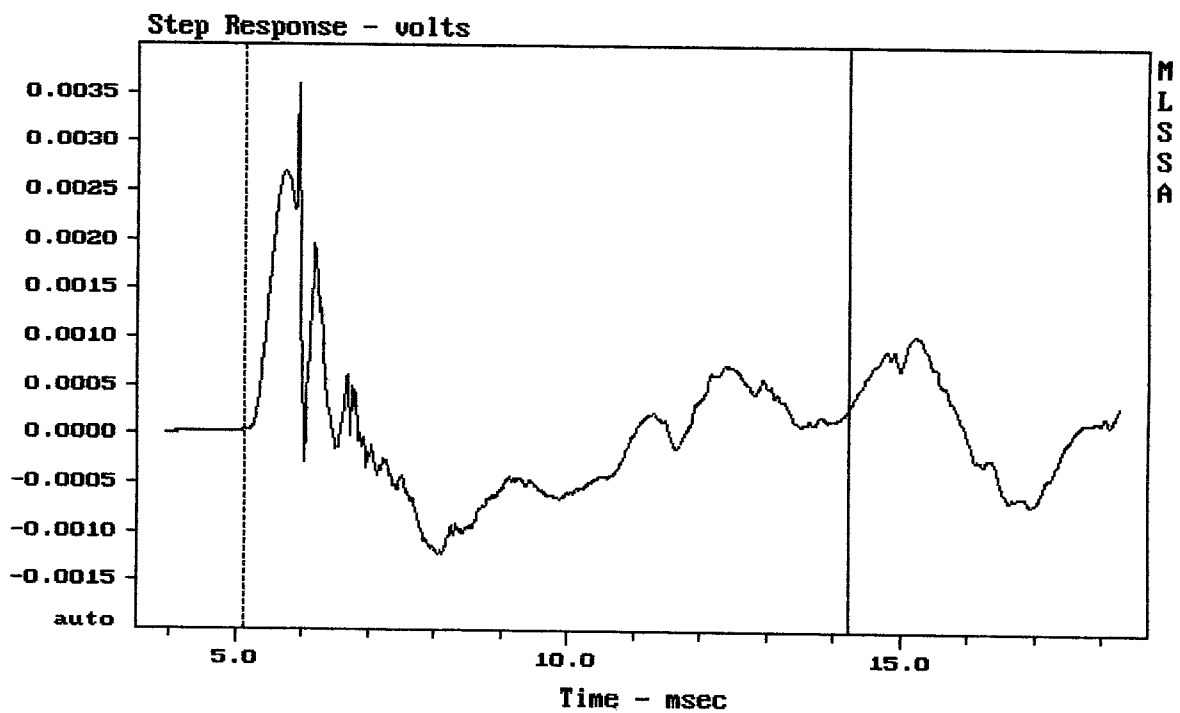


CURSOR: y = 0.000289632 x = 14.2340 (1294)

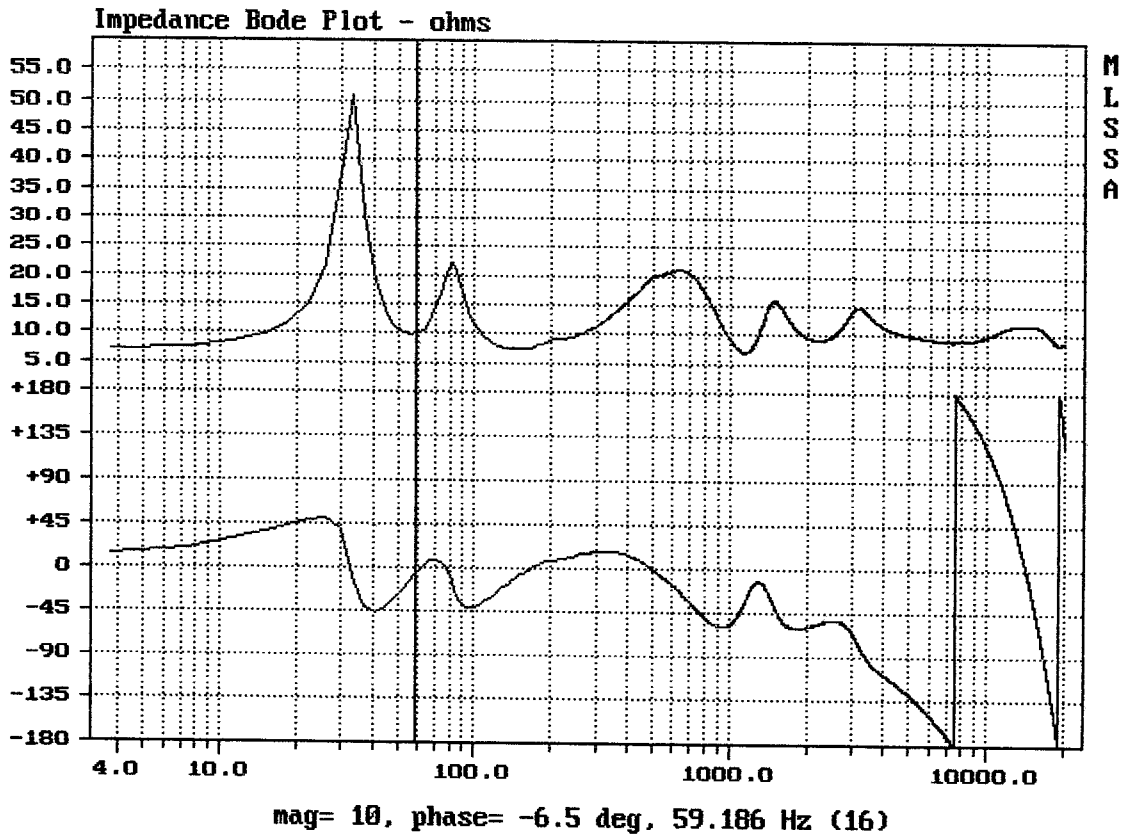

dtto

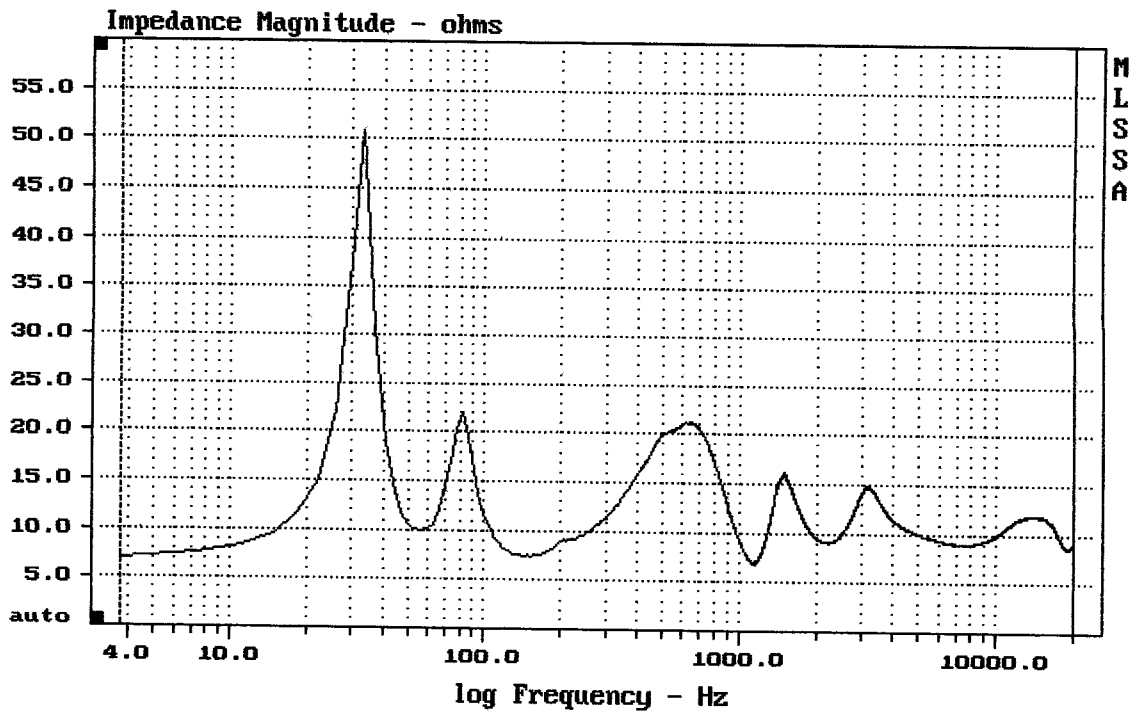


mean: 10.7, rms: 10.91, std: 2.136, max: 50.78, min: 6.887

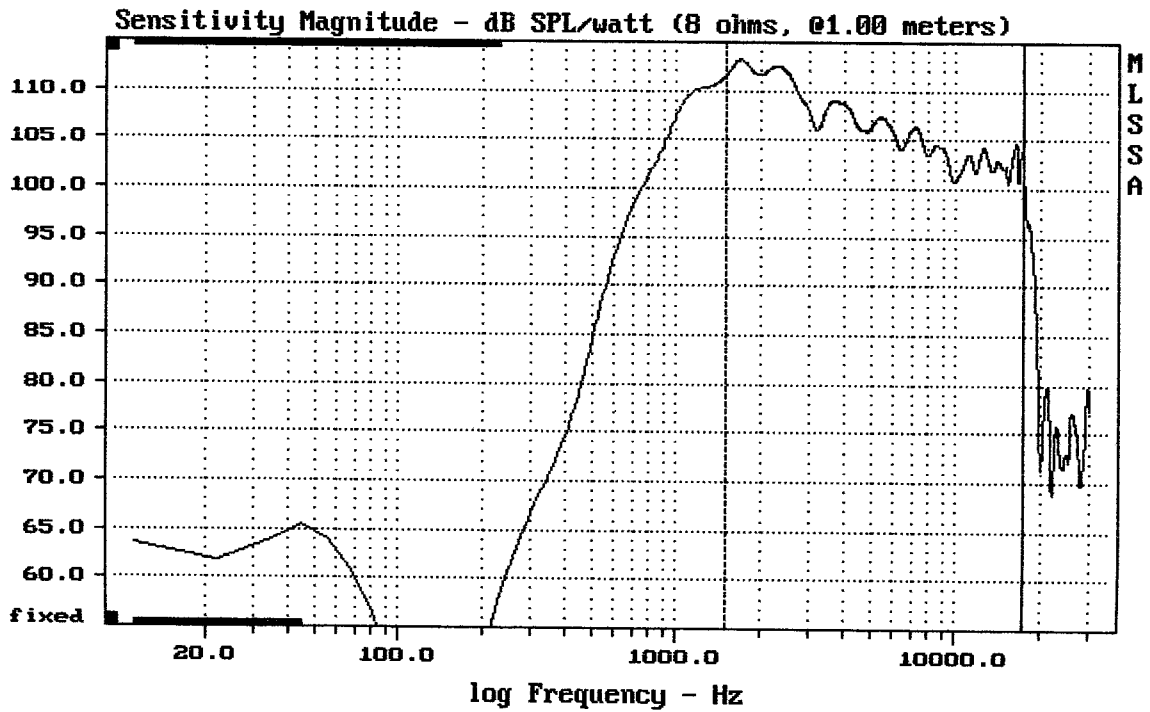

Level (1498:17500 Hz) = 108.37 dB SPL/watt (8 ohms, @1.00 meters)


RCF +REDUKCE EAW+ME90 [Z MK2194]

MLSSA: Frequency Domain

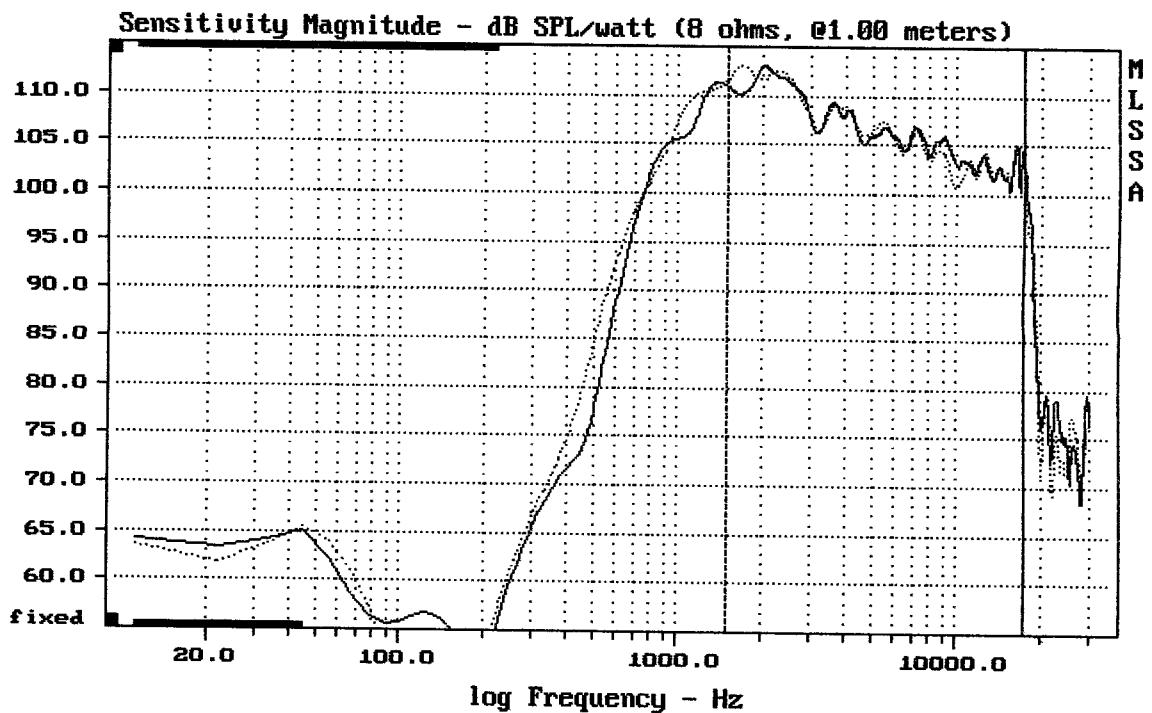

Overlay Compare: dev= +2.6/-3.2, std= 0.89, avg= 0.21

DTTO/DTTO+H100/----

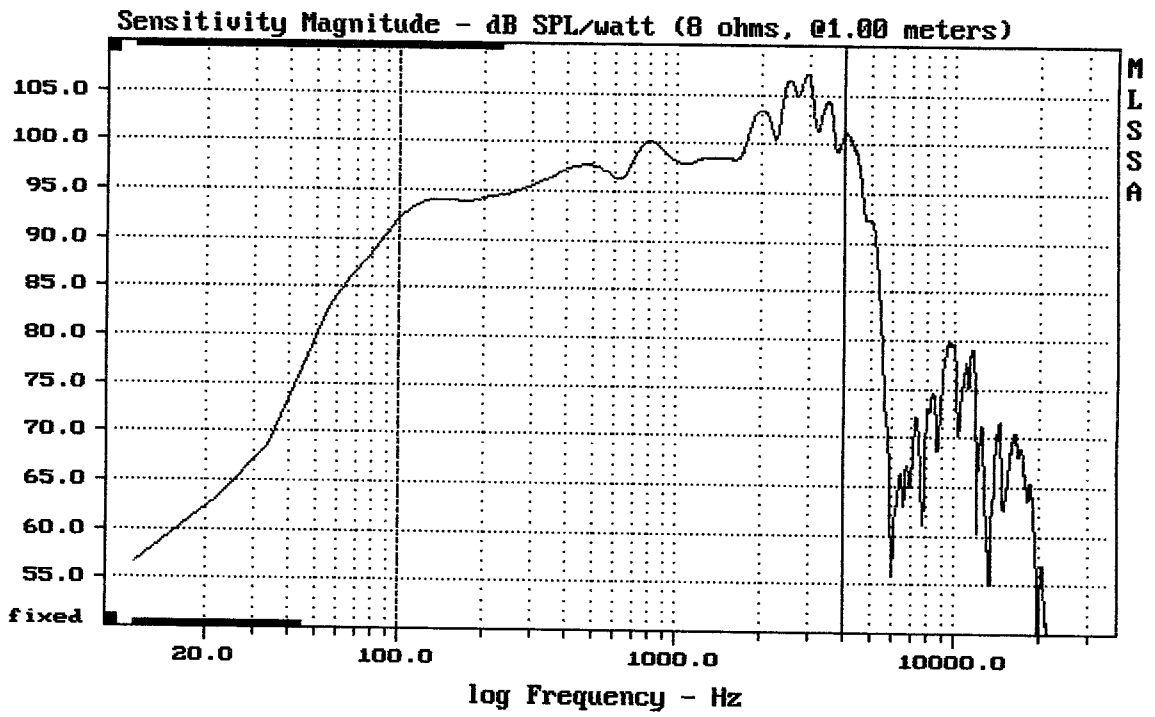

Level (100:4006 Hz) = 99.56 dB SPL/watt (8 ohms, @1.00 meters)

EAW 804051 MK2194

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.34	Ohms
2	Fs	49.28	Hz
3	Re	5.76	Ohms[dc]
4	Res	101.17	Ohms
5	Qms	7.92	
6	Qes	0.45	
7	Qts	0.43	
8	L1	0.62	mH
9	L2	0.90	mH
10	R2	4.27	Ohms
11	RMSE-load	0.74	Ohms
12	Vas(Sd)	100.67	liters
13	Mms	44.01	grams
14	Cms	237	$\mu\text{M}/\text{Newton}$
15	B1	13.20	Tesla-M
16	SPLref(Sd)	96.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (60.00 grams)

Area (Sd): 550.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.1% (-20% to -50% is recommended).

EAW 804051 OPR.

MLSSA: Parameters

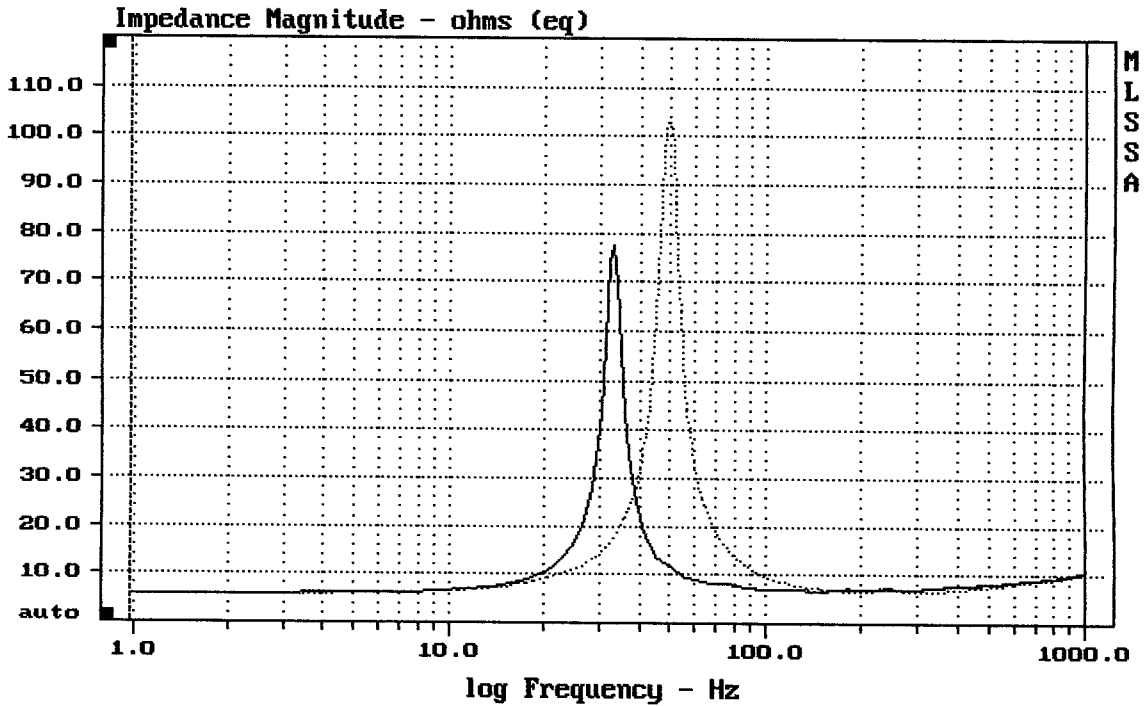

mean: 9.691, rms: 13.05, std: 8.737, max: 103.8, min: 5.848

MLSSA: Frequency Domain