


Level (100:3607 Hz) = 95.66 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE GAMMA 10

MLSSA: Frequency Domain

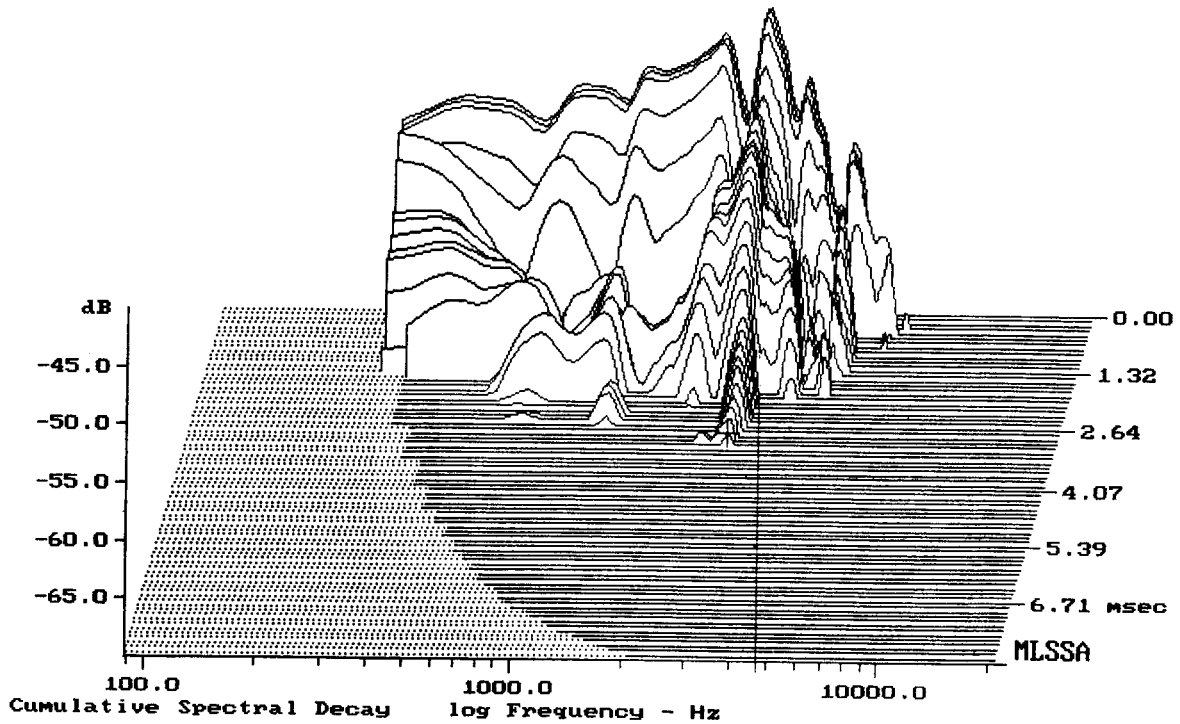

-68.98 dB, 2663 Hz (60), 3.080 msec (29)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.38	Ohms
2	Fs	62.05	Hz
3	Re	5.72	Ohms[dc]
4	Res	66.31	Ohms
5	Qms	5.78	
6	Qes	0.50	
7	Qts	0.46	
8	L1	0.85	mH
9	L2	1.07	mH
10	R2	4.03	Ohms
11	RMSE-load	0.64	Ohms
12	Vas(Sd)	42.38	liters
13	Mms	26.16	grams
14	Cms	252	$\mu\text{M}/\text{Newton}$
15	B1	10.82	Tesla-M
16	SPLref(Sd)	94.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (20.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.0% (-20% to -50% is recommended).

EMINENCE GAMMA 10

MLSSA: Parameters

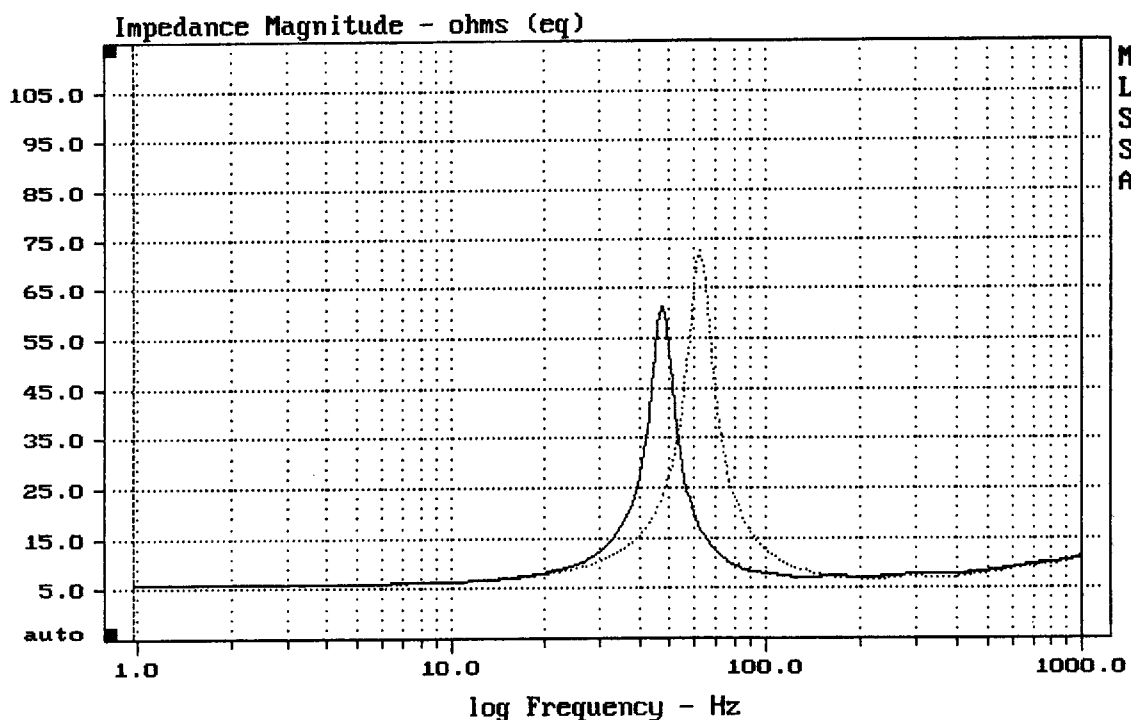

CURSOR: dy = -0.122848 x = 1000.9766 (1025)

DTTO

MLSSA: Frequency Domain