

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.24	Ohms
2	Fs	49.66	Hz
3	Re	5.98	Ohms[dc]
4	Res	101.87	Ohms
5	Qms	7.81	
6	Qes	0.46	
7	Qts	0.43	
8	L1	0.70	mH
9	L2	0.87	mH
10	R2	2.44	Ohms
11	RMSE-load	0.46	Ohms
12	Vas(Sd)	73.61	liters
13	Mms	23.51	grams
14	Cms	437	$\mu\text{M}/\text{Newton}$
15	B1	9.78	Tesla-M
16	SPLref(Sd)	94.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -40.6% (-20% to -50% is recommended).

EMINENCE BETA 10


MLSSA: Parameters

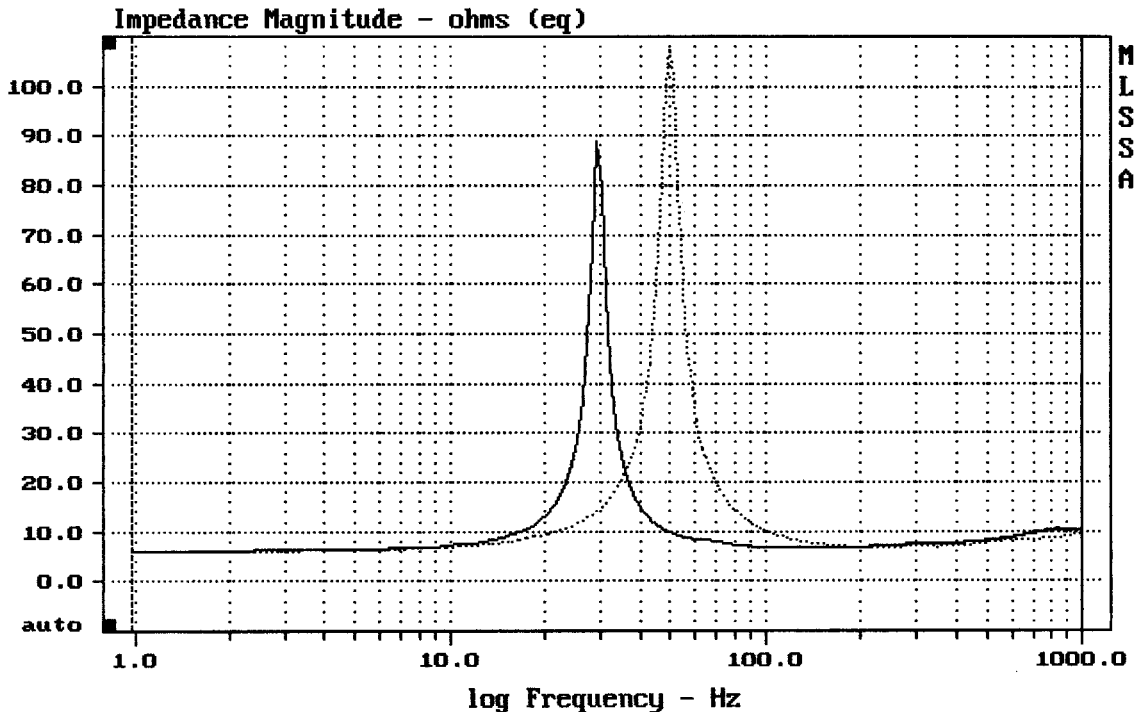

CURSOR: dy = -0.581113 x = 1000.9766 (1025)

DTTO


MLSSA: Frequency Domain

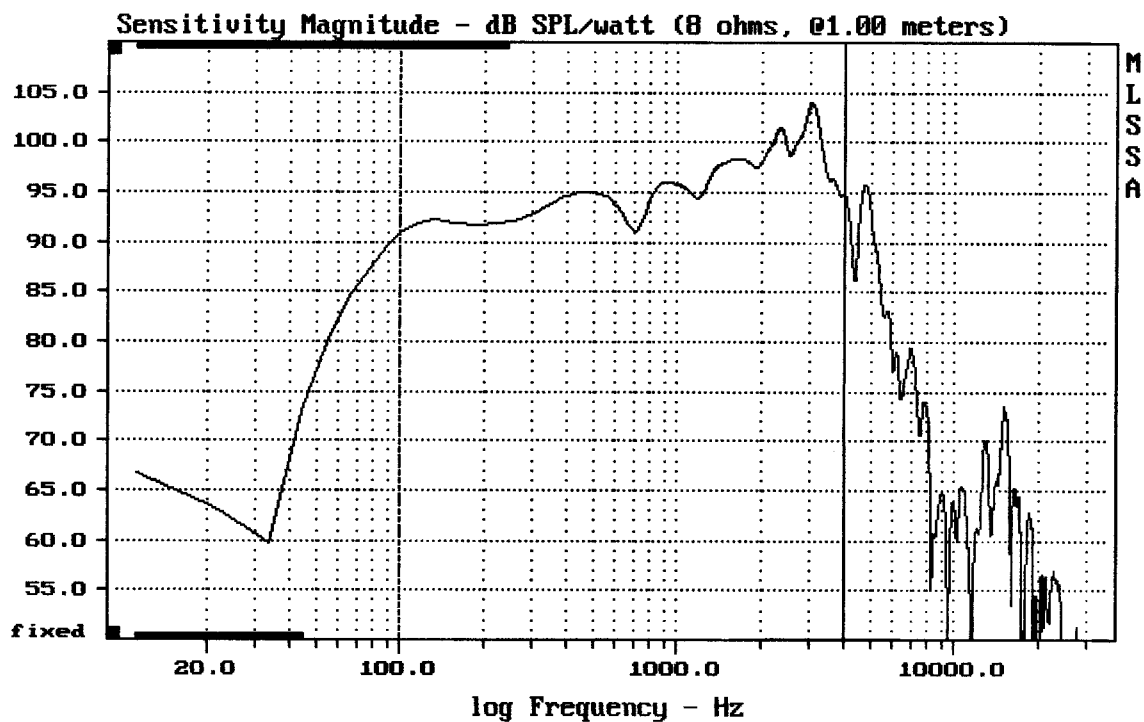

Level (100:3995 Hz) = 96.22 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE BETA 10

MLSSA: Frequency Domain

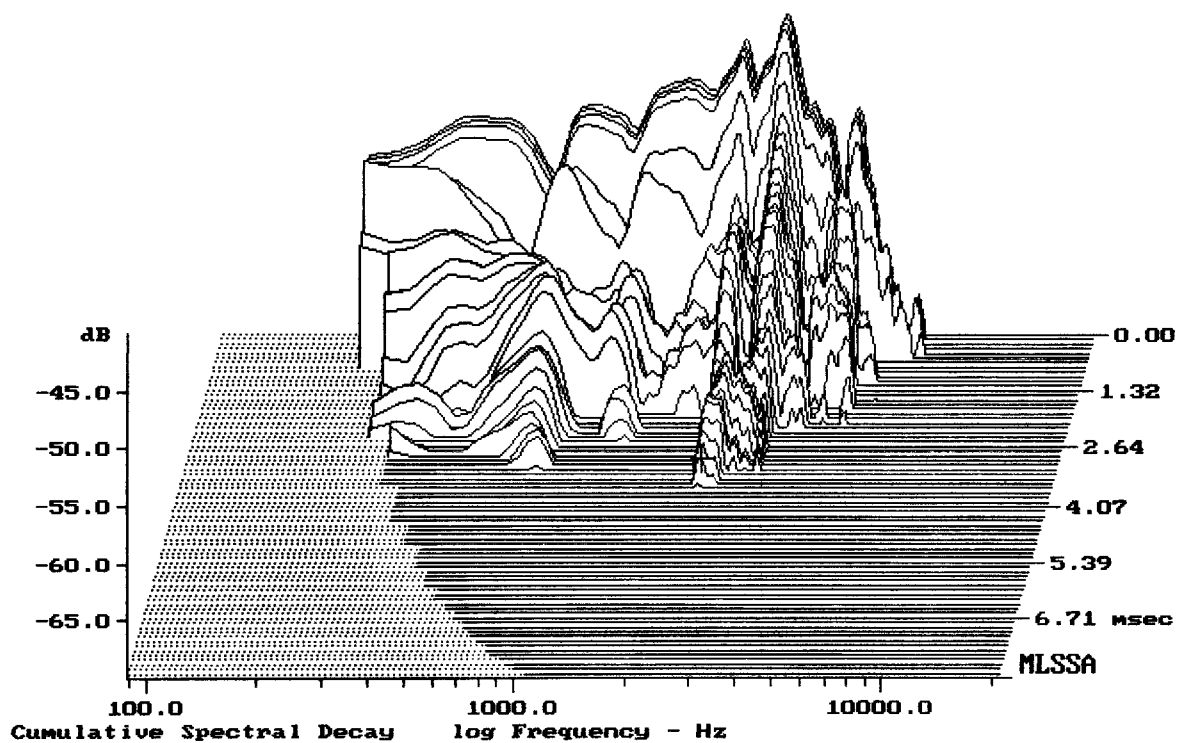

-67.84 dB, 2308 Hz (52), 3.520 msec (33)