


Level (100:3995 Hz) = 97.79 dB SPL/watt (8 ohms, @1.00 meters)

10HPL64

MLSSA: Frequency Domain

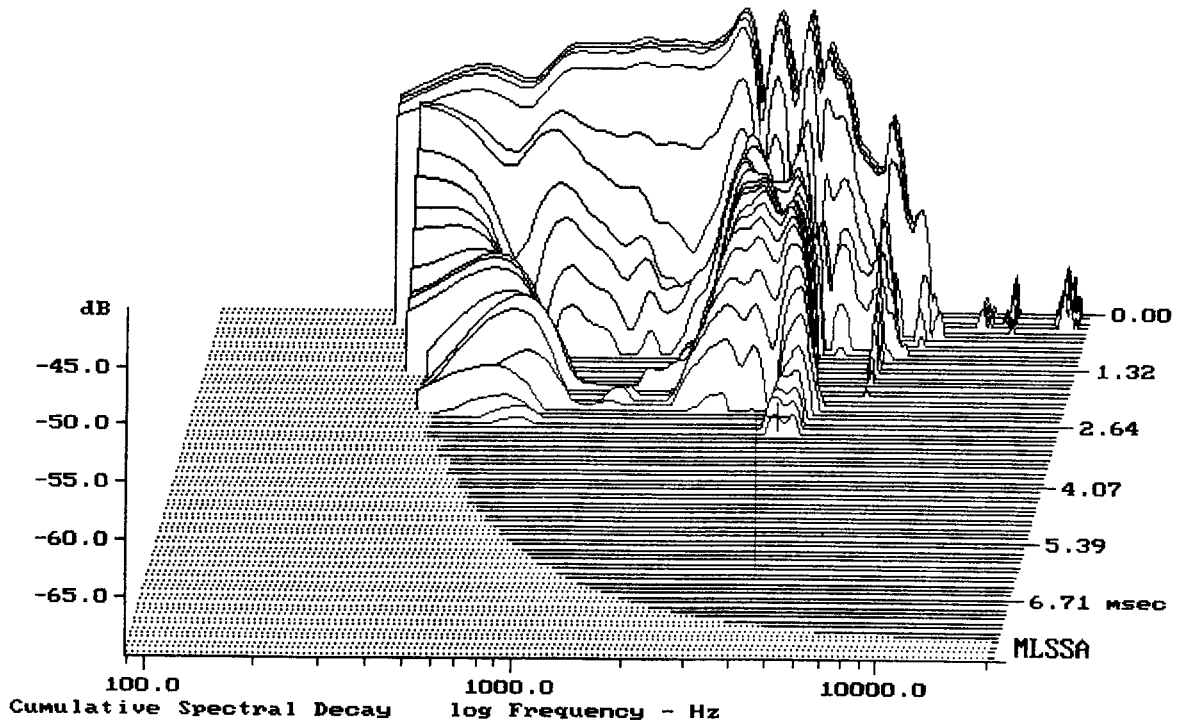

-68.52 dB, 3640 Hz (82), 2.860 msec (27)

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.69	Ohms
2	Fs	65.32	Hz
3	Re	5.59	Ohms[dc]
4	Res	114.27	Ohms
5	Qms	6.10	
6	Qes	0.30	
7	Qts	0.28	
8	L1	0.15	mH
9	L2	1.04	mH
10	R2	5.80	Ohms
11	RMSE-load	0.76	Ohms
12	Vas(Sd)	35.78	liters
13	Mms	23.87	grams
14	Cms	249	$\mu\text{M}/\text{Newton}$
15	B1	13.54	Tesla-M
16	SPLref(Sd)	97.1	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 320.00 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -38.1% (-20% to -50% is recommended).

10HPL64

MLSSA: Parameters

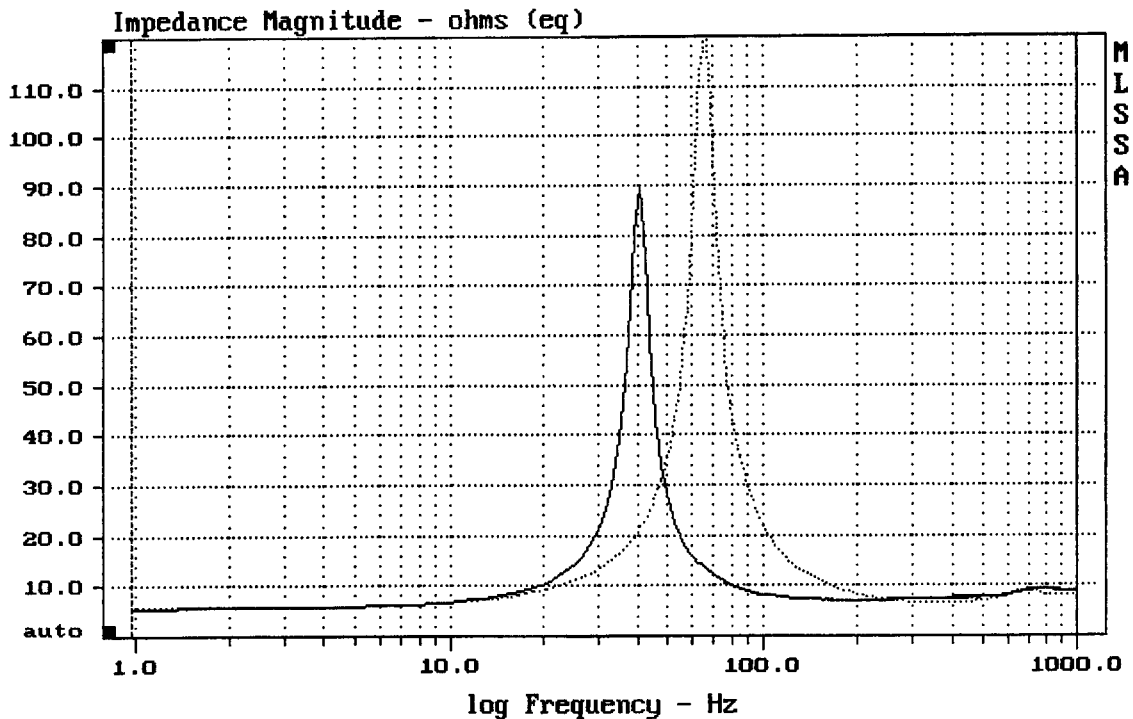

CURSOR: dy = -0.800637 x = 1025.9766 (1025)

DTTO

MLSSA: Frequency Domain