

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.90	Ohms
2	Fs	36.30	Hz
3	Re	5.92	Ohms[dc]
4	Res	124.37	Ohms
5	Qms	7.77	
6	Qes	0.37	
7	Qts	0.35	
8	L1	0.92	mH
9	L2	2.05	mH
10	R2	11.69	Ohms
11	RMSE-load	1.14	Ohms
12	Vas(Sd)	224.86	liters
13	Mms	154.45	grams
14	Cms	124	$\mu\text{M}/\text{Newton}$
15	Bl	23.74	Tesla-M
16	SPLref(Sd)	96.5	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (80.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -19.4% (-20% to -50% is recommended).


DAS 18S

MLSSA: Parameters

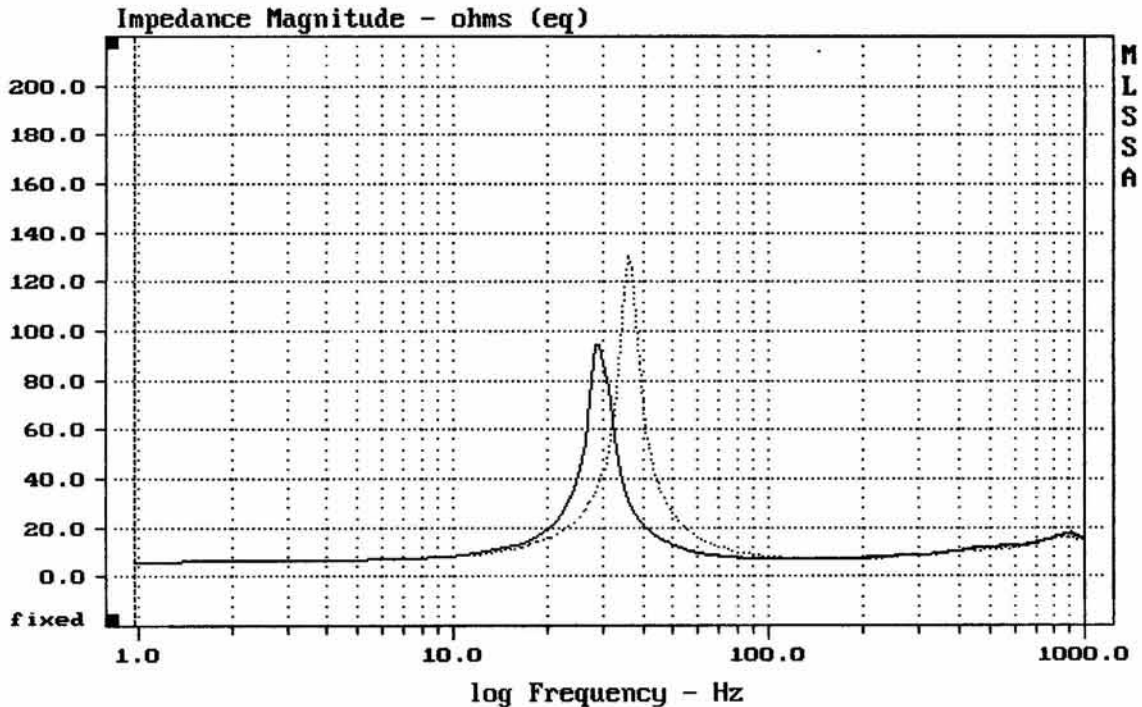

CURSOR: dy = -0.236332 x = 1000.9766 (1025)


MLSSA: Frequency Domain

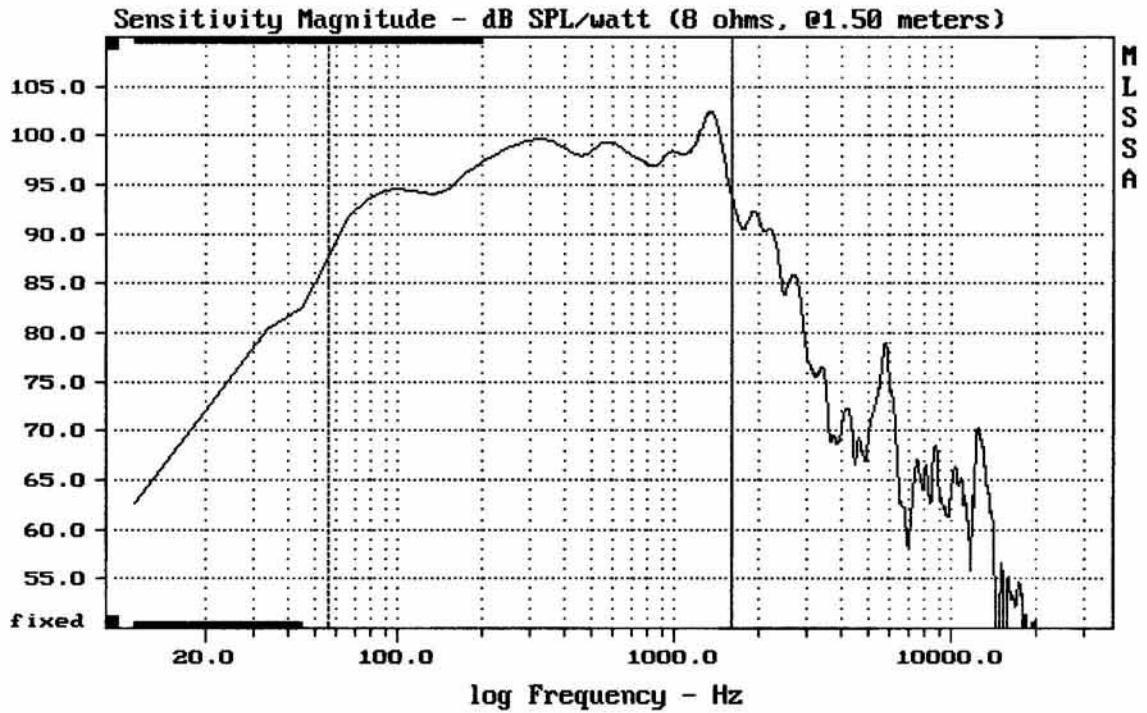

Level (55:1598 Hz) = 97.51 dB SPL/watt (8 ohms, @1.50 meters)

DAS 18S

MLSSA: Frequency Domain

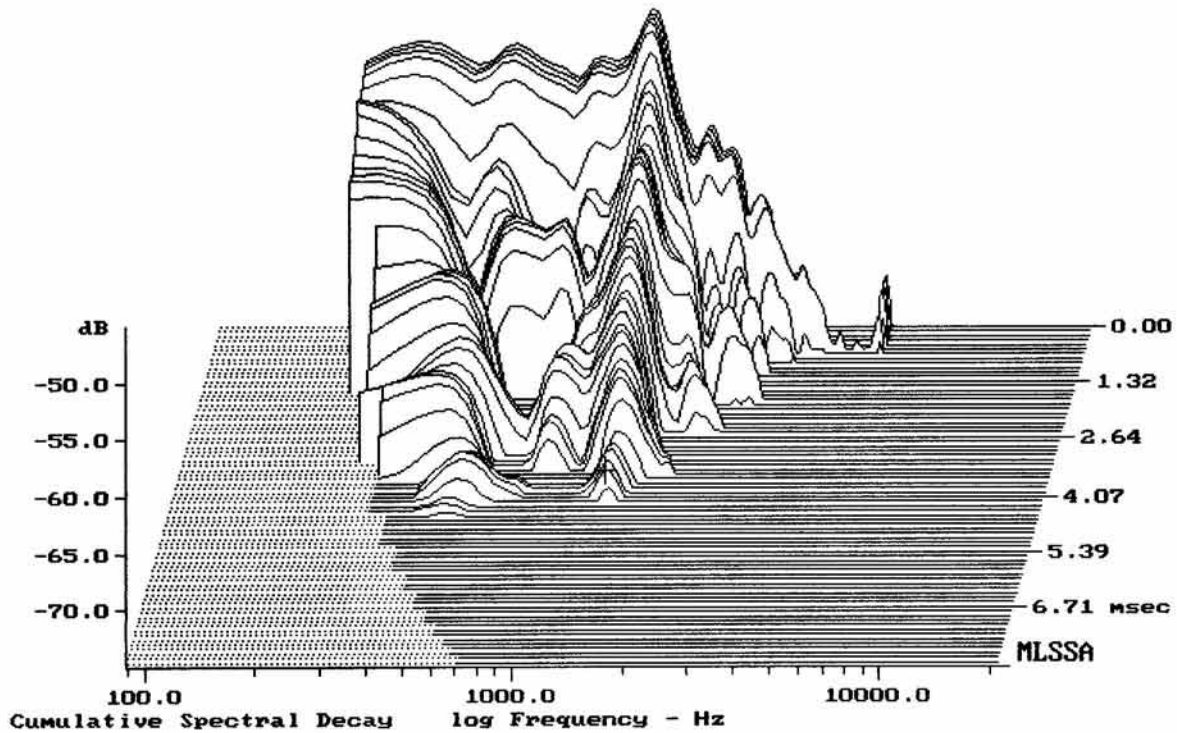

-72.67 dB, 1332 Hz (30), 4.070 msec (38)