

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.48	Ohms
2	Fs	69.83	Hz
3	Re	5.30	Ohms[dc]
4	Res	89.20	Ohms
5	Qms	6.14	
6	Qes	0.37	
7	Qts	0.34	
8	L1	0.20	mH
9	L2	1.45	mH
10	R2	6.63	Ohms
11	RMSE-load	0.52	Ohms
12	Vas(Sd)	29.56	liters
13	Mms	29.61	grams
14	Cms	175	$\mu\text{M}/\text{Newton}$
15	Bl	13.73	Tesla-M
16	SPLref(Sd)	96.2	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.0% (-20% to -50% is recommended).


RCF L10-568H

MLSSA: Parameters

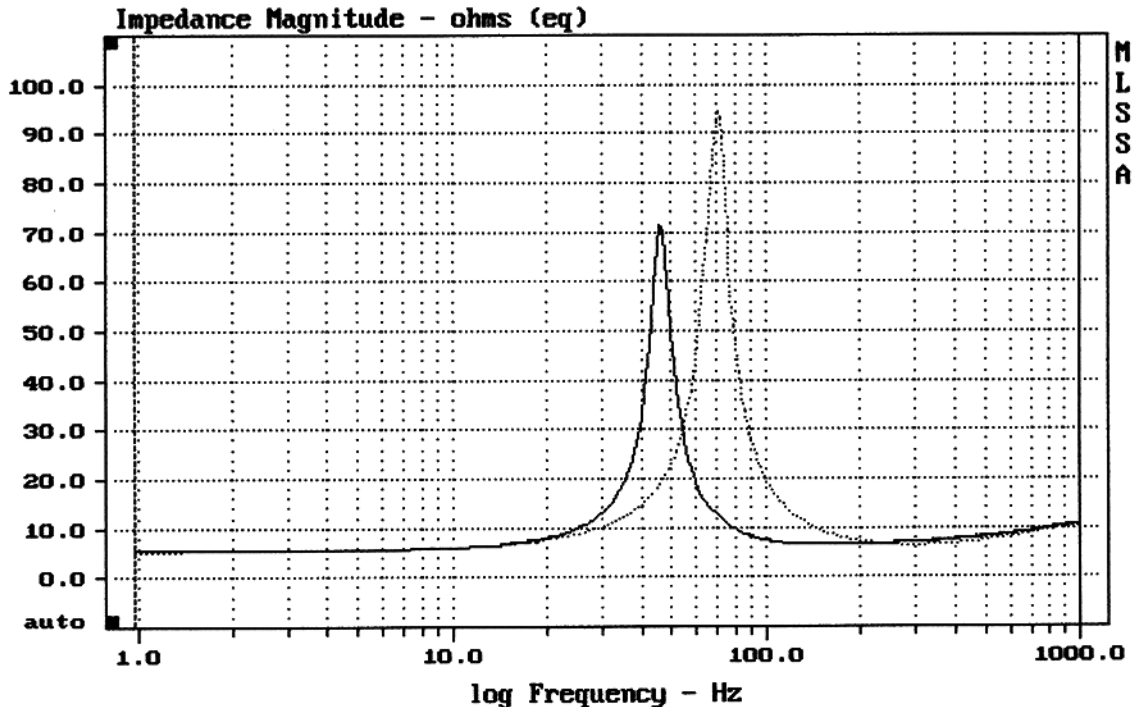

mean: 10.52, rms: 14.53, std: 10.02, max: 94.44, min: 5.323


MLSSA: Frequency Domain

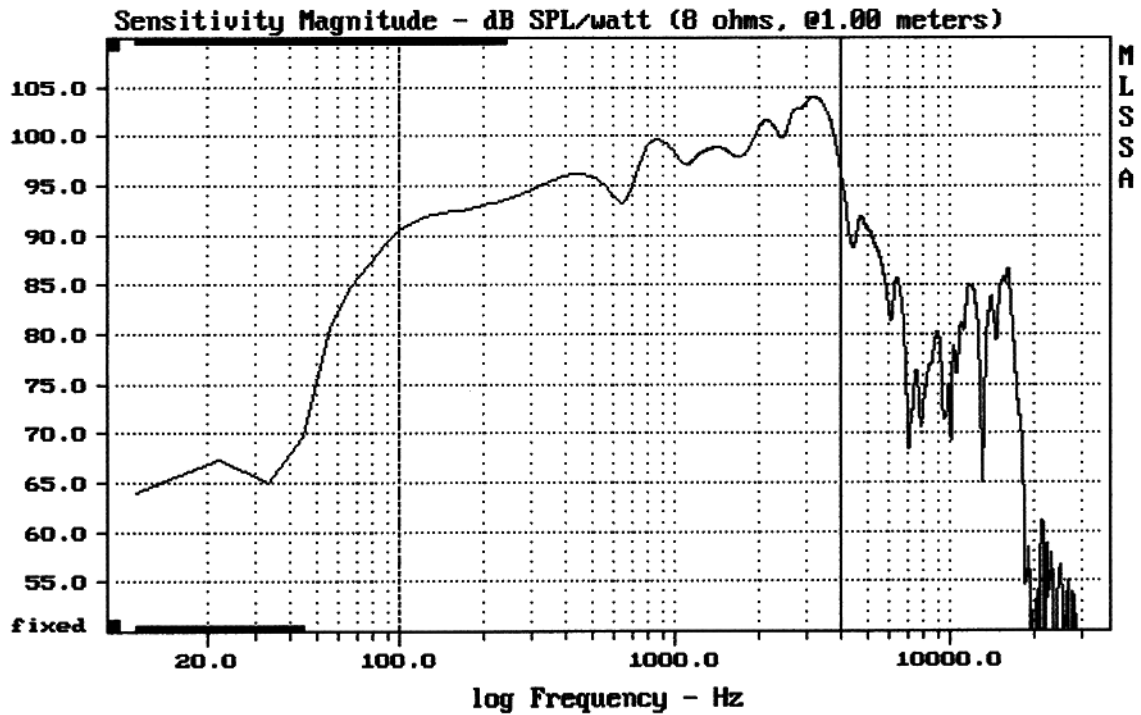

Level (100:3995 Hz) = 97.95 dB SPL/watt (8 ohms, @1.00 meters)

RCF L10-568H

MLSSA: Frequency Domain

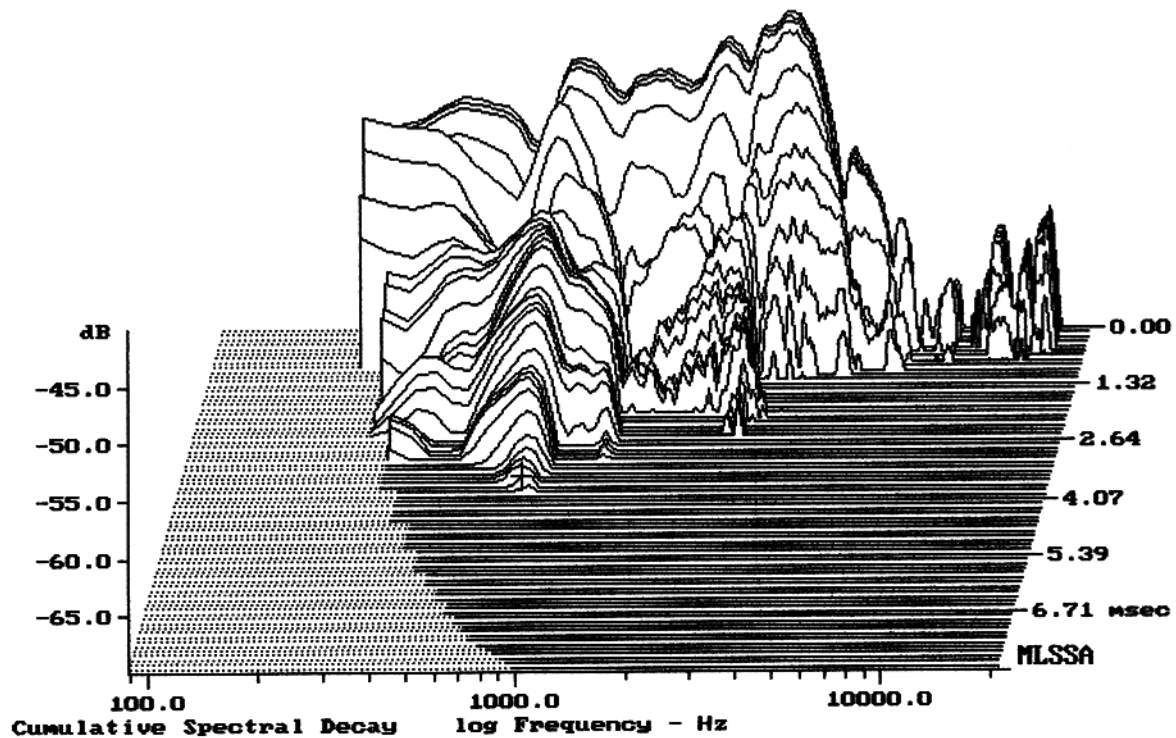

-69.00 dB, 755 Hz (17), 3.740 msec (35)