

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

| Line | Parameter | Value | Units |
|------|------------|--------|----------------|
| 1 | RMSE-free | 1.63 | Ohms |
| 2 | Fs | 74.04 | Hz |
| 3 | Re | 5.41 | Ohms[dc] |
| 4 | Res | 108.95 | Ohms |
| 5 | Qms | 4.62 | |
| 6 | Qes | 0.23 | |
| 7 | Qts | 0.22 | |
| 8 | L1 | 0.48 | mH |
| 9 | L2 | 1.07 | mH |
| 10 | R2 | 4.85 | Ohms |
| 11 | RMSE-load | 0.50 | Ohms |
| 12 | Vas(Sd) | 23.75 | liters |
| 13 | Mms | 32.78 | grams |
| 14 | Cms | 141 | μ M/Newton |
| 15 | B1 | 18.97 | Tesla-M |
| 16 | SPLref(Sd) | 98.1 | dB[Re] |
| 17 | Rub-index | 0.06 | |

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.0% (-20% to -50% is recommended).


RCF 10-750YK

MLSSA: Parameters

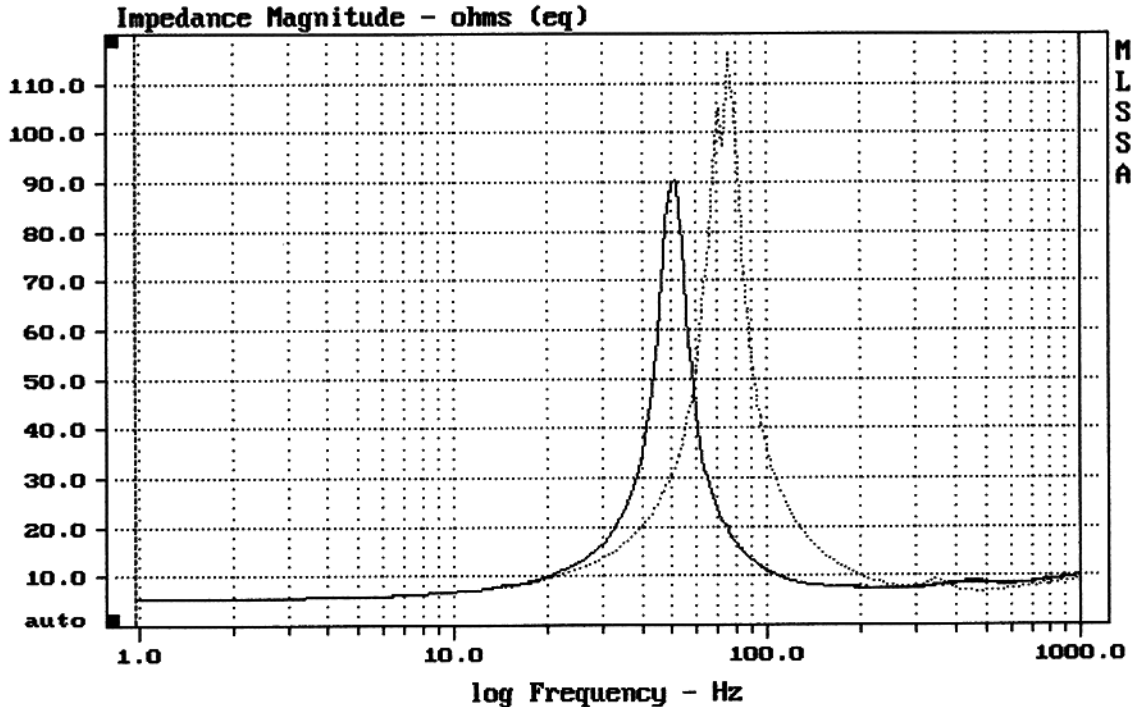

mean: 12.25, rms: 19.11, std: 14.67, max: 116.2, min: 5.401


MLSSA: Frequency Domain

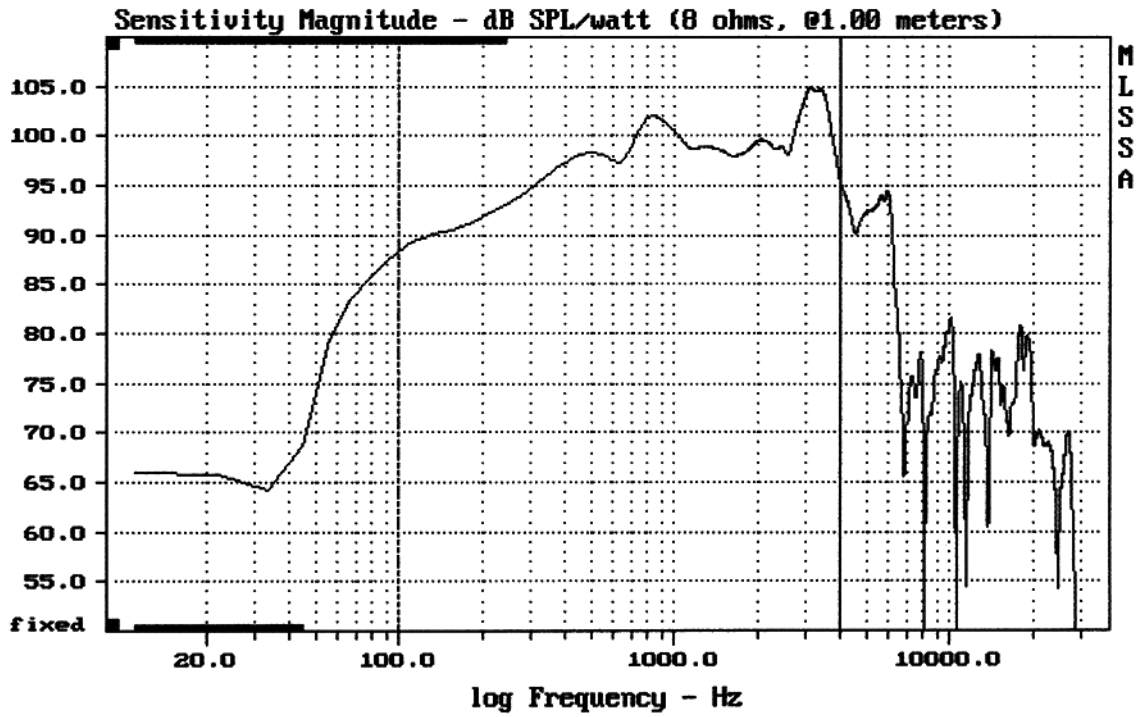

Level (100:3995 Hz) = 98.48 dB SPL/watt (8 ohms, @1.00 meters)

RCF L10-750YK

MLSSA: Frequency Domain

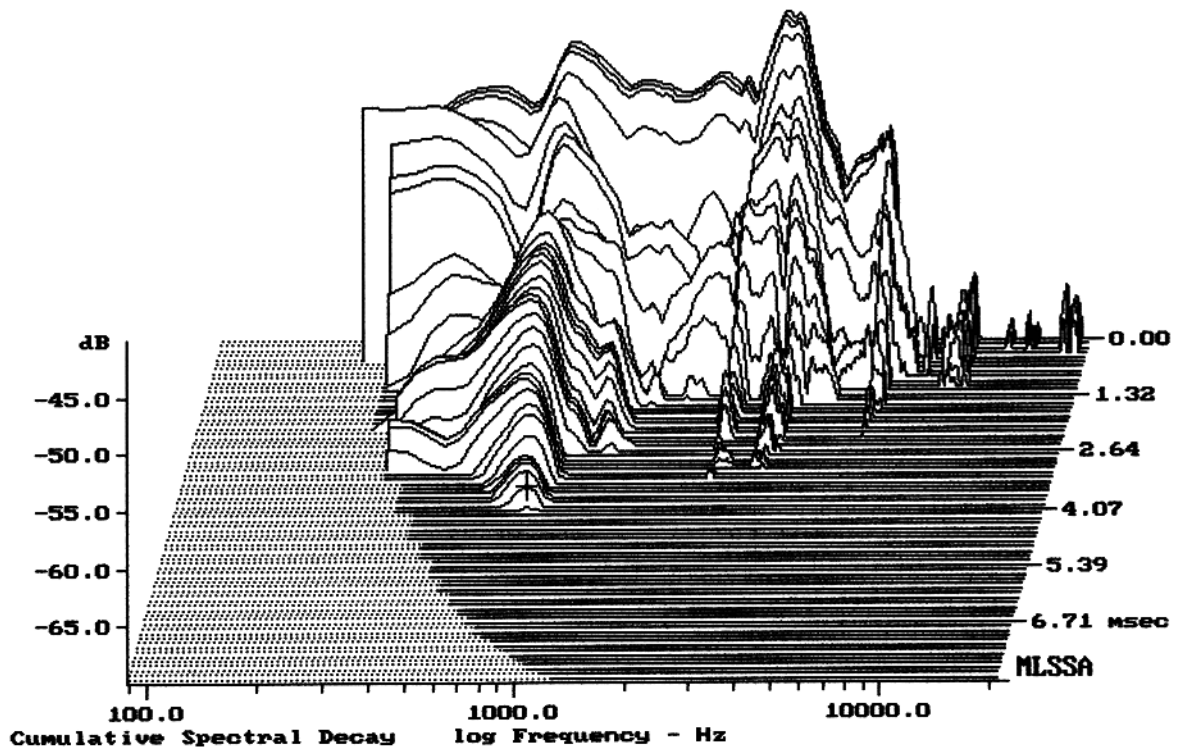

-68.26 dB, 799 Hz (18), 3.960 msec (37)