

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.64	Ohms
2	Fs	36.58	Hz
3	Re	5.14	Ohms[dc]
4	Res	88.21	Ohms
5	Qms	7.41	
6	Qes	0.43	
7	Qts	0.41	
8	L1	1.32	mH
9	L2	1.50	mH
10	R2	8.05	Ohms
11	RMSE-load	0.77	Ohms
12	Vas(Sd)	198.31	liters
13	Mms	196.32	grams
14	Cms	96	$\mu\text{M}/\text{Newton}$
15	B1	23.17	Tesla-M
16	SPLref(Sd)	95.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1210.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.1% (-20% to -50% is recommended).


18TBX100

MLSSA: Parameters

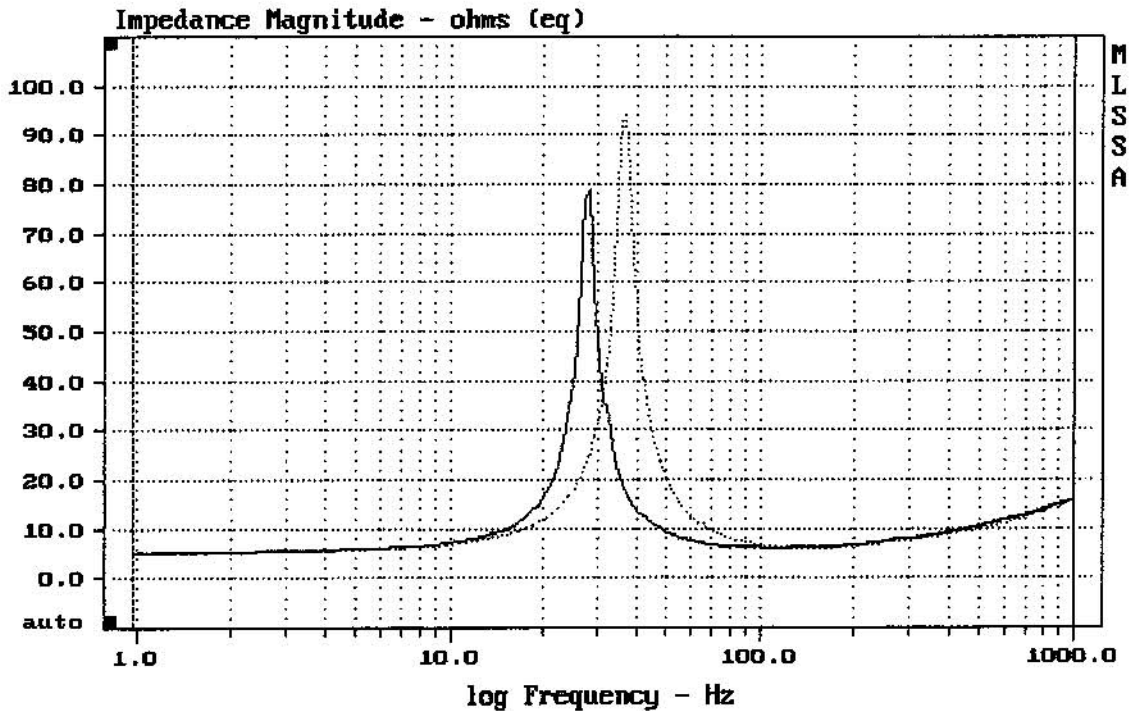

mean: 11.35, rms: 13.3, std: 6.93, max: 94.07, min: 5.165


MLSSA: Frequency Domain

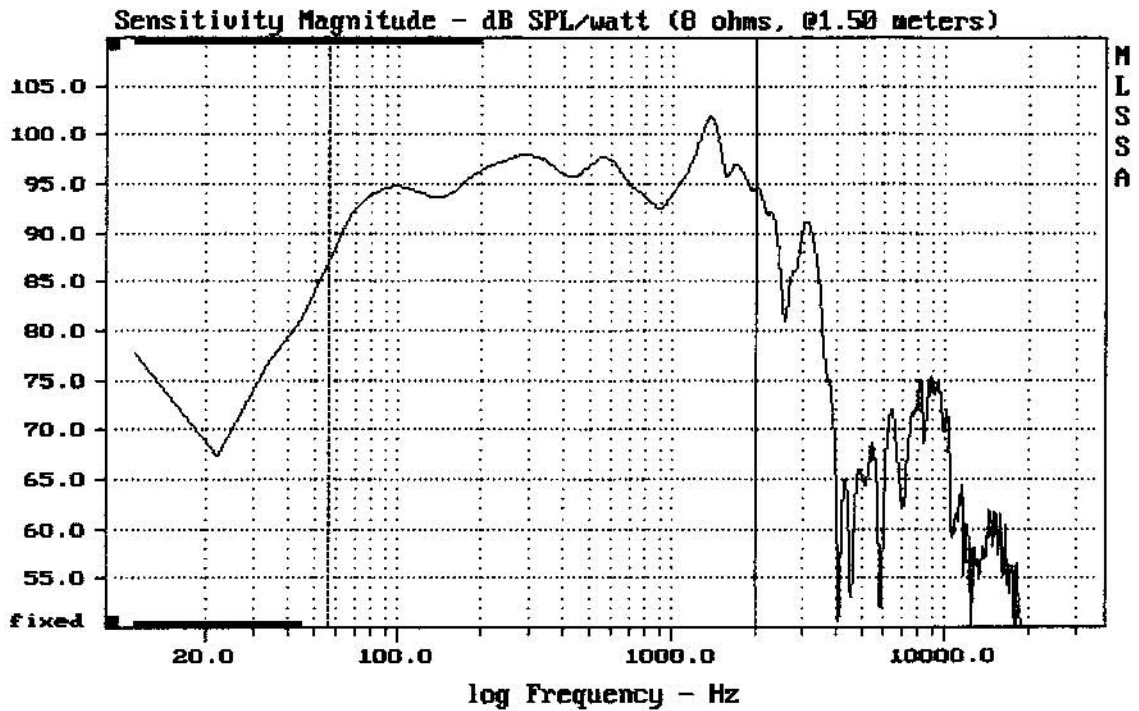

Level (55:1990 Hz) = 95.99 dB SPL/watt (8 ohms, @1.50 meters)

18TBX100

MLSSA: Frequency Domain

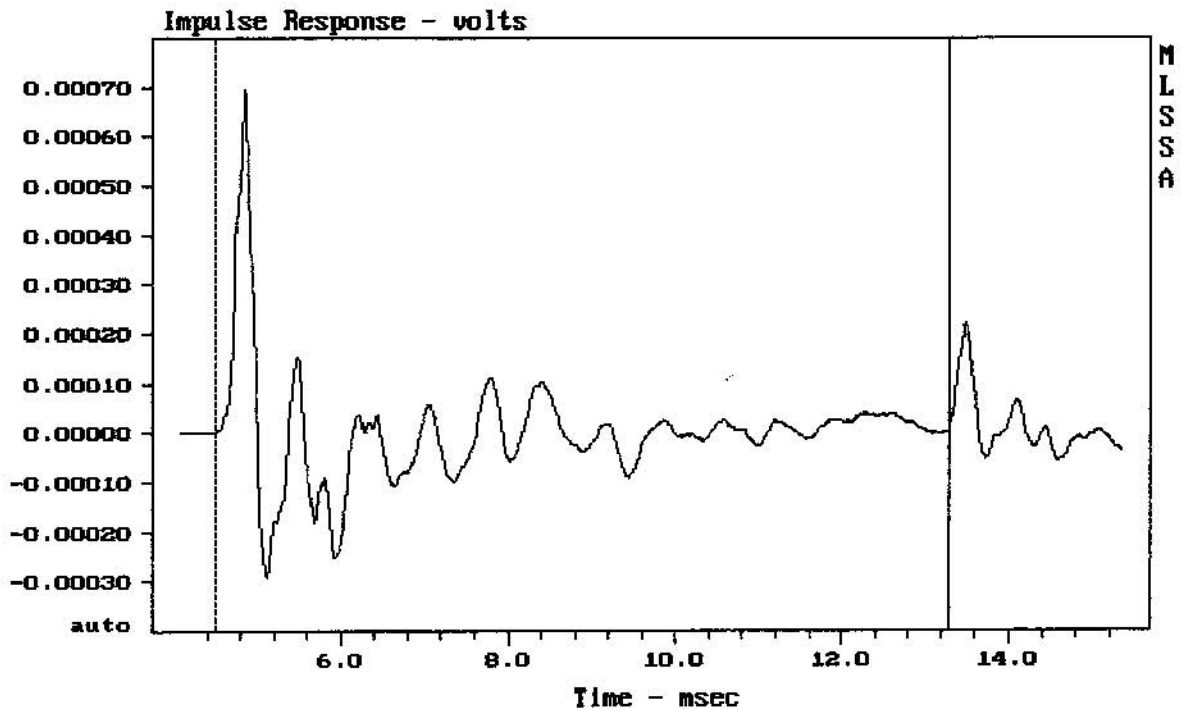

mean: -2.313e-007, rms: 0.0001003, std: 0.0001003, max: 0.0006933, min: -0.000

18TBX100