

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.44	Ohms
2	Fs	60.60	Hz
3	Re	4.58	Ohms[dc]
4	Res	134.04	Ohms
5	Qms	7.00	
6	Qes	0.24	
7	Qts	0.23	
8	L1	0.40	mH
9	L2	1.08	mH
10	R2	2.27	Ohms
11	RMSE-load	0.61	Ohms
12	Vas(Sd)	29.15	liters
13	Mms	36.20	grams
14	Cms	191	$\mu\text{M}/\text{Newton}$
15	B1	16.25	Tesla-M
16	SPLref(Sd)	96.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (30.00 grams)

Area (Sd): 330.06 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.8% (-20% to -50% is recommended).


10PLB76

MLSSA: Parameters

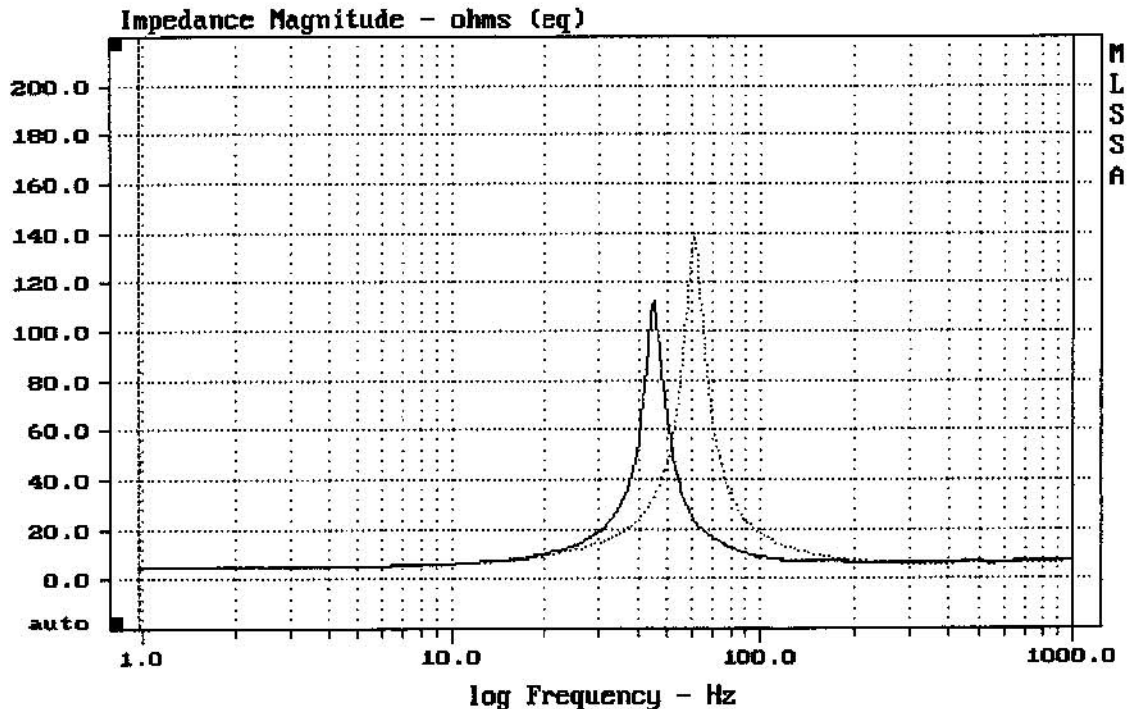

mean: 9.821, rms: 16.96, std: 13.82, max: 139.8, min: 4.648


MLSSA: Frequency Domain

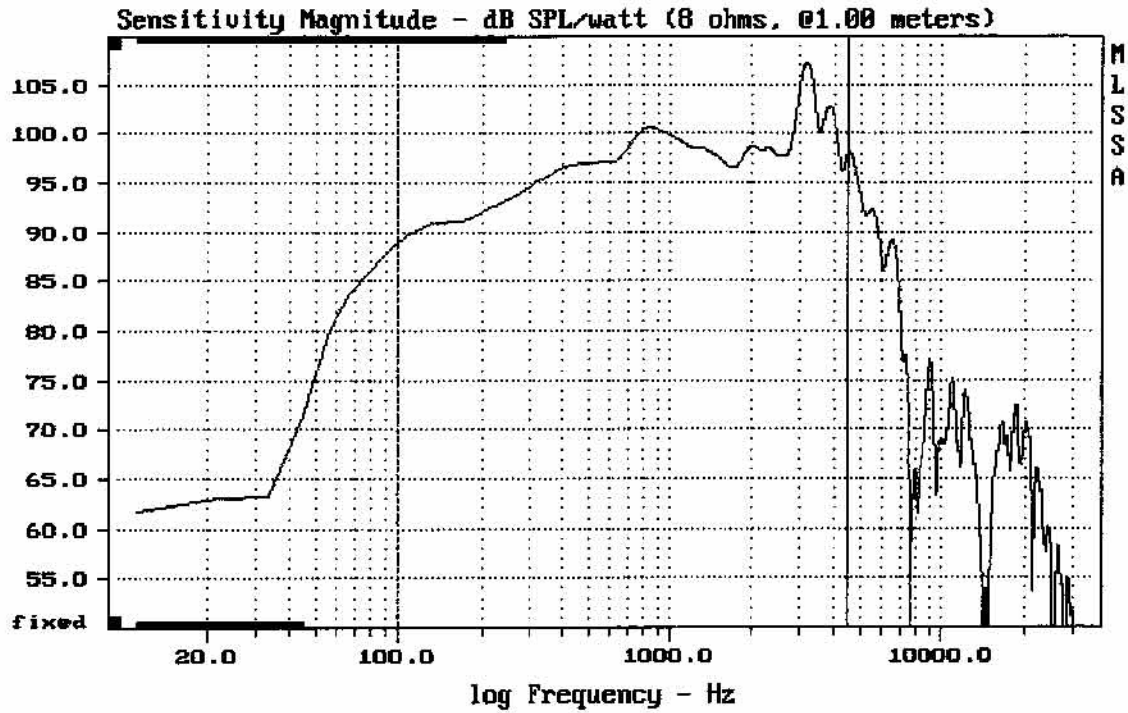

Level (100:4506 Hz) = 98.27 dB SPL/watt (8 ohms, @1.00 meters)

10PLB76

MLSSA: Frequency Domain

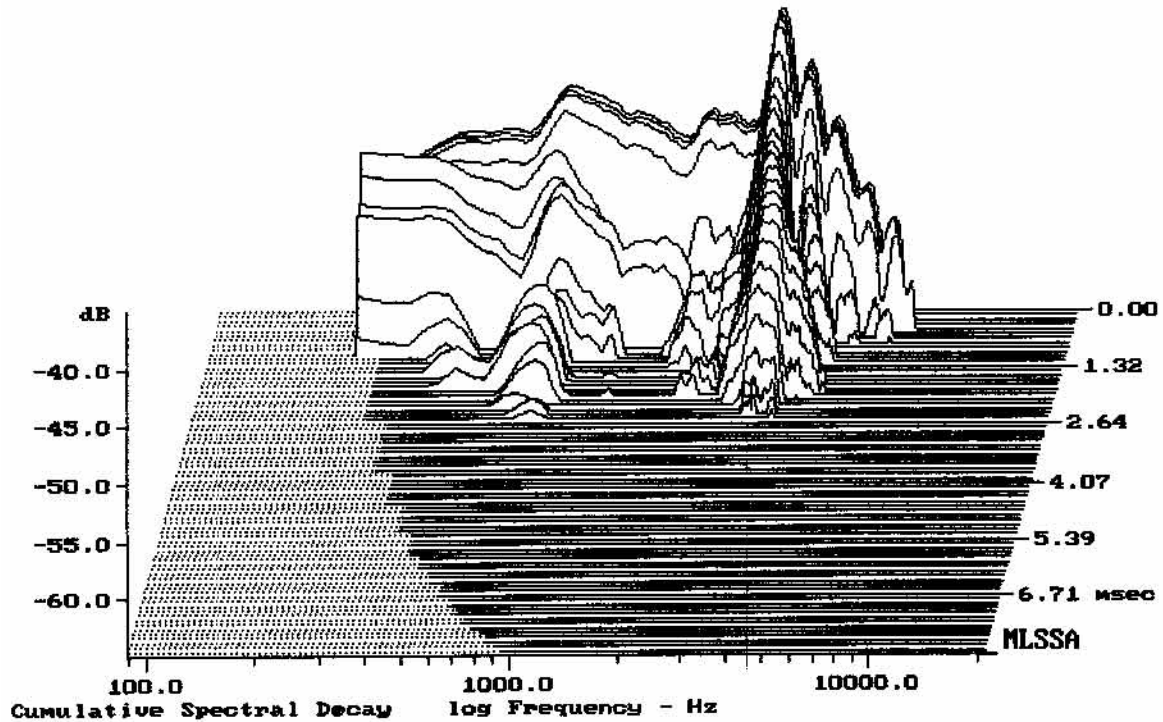

-63.52 dB, 3107 Hz (70), 2.420 msec (23)